

# SSC-501-D2 SPECIFICATIONS

## LARGE WALL HANDSFREE AUTODIAL SPEAKERPHONE


*Standard Analog Power, but also available in VoIP versions*

Stainless steel wall mount payphone size handsfree speakerphone that automatically dials a preprogrammed number from 1-11 digits when the button is pushed. If there is no answer when first number is dialed, phone will reset itself and dial a second preprogrammed number and red/green LED light provides visual indication of call progress. Capable of dialing a PBX or access number, block or allow incoming calls, and provides call duration time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with weatherproof, puncture resistant speaker and microphone, instruction or advertising window, ID window, tamper resistant security screws, and mounting backplate.



### SPECIFICATIONS

<b>Panel Size:</b>	7.5" W x 21" H x 4.10" D
<b>Weight:</b>	Approximately 16 lbs.
<b>Mounting Instructions:</b>	<b>Vertical Surface Mount:</b> Separate the cover assembly from the backplate. The backplate assembly is designed to be mounted on any flat vertical surface. Four mounting holes are provided.
<b>Environment:</b>	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
<b>Programming:</b>	Via DTMF Keypad
<b>Input Power:</b>	Line Powered
<b>Loop Current:</b>	30mA min to 80mA max
<b>Impedance:</b>	600 ohms
<b>Type Jack:</b>	RJ11C
<b>Ringer Equivalency:</b>	0.4A
<b>UL &amp; FCC Registration:</b>	Certified
<b>ACCESSORIES:</b>	301-037 Security Tool (required for installation)

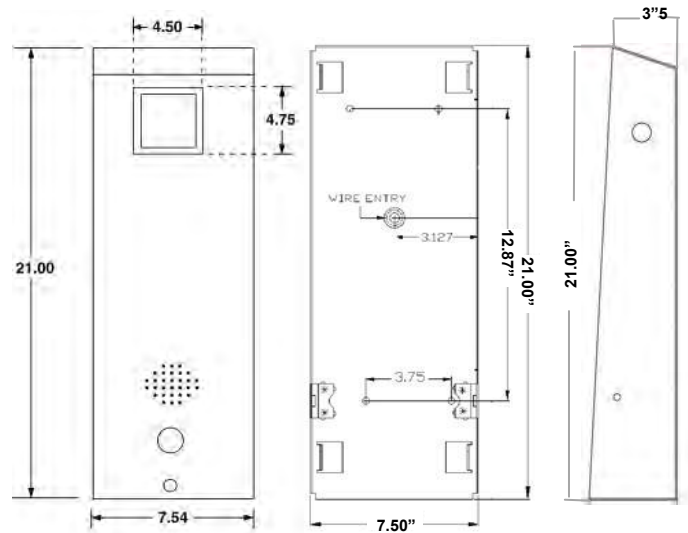

### ADDITIONAL OPTIONS IP - Voice over Internet Protocol Version available on all models (SIP)

-ADA	-RIS	-RIL	Additional Options & Features
			Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
<ul style="list-style-type: none"> <li>Red/ green LED call progress indicator light</li> <li>Braille Emergency Plate "EMERG. PHONE"</li> <li>Red push button</li> </ul>	Ring Indicator Flashing Blue Light (Requires AC Power)	Ring Indicator Light located on the phone panel for visual ring indication	



*Providing Telecommunication Solutions Since 1930*

Communication Equipment  
& Engineering Company

http://www.ceeco.net  
Email: sales@ceeco.net

519 SW Park Street  
Okeechobee, FL  
Voice 863-357-0798  
Fax 863-357-0006