

SSP-351-X SPECIFICATIONS

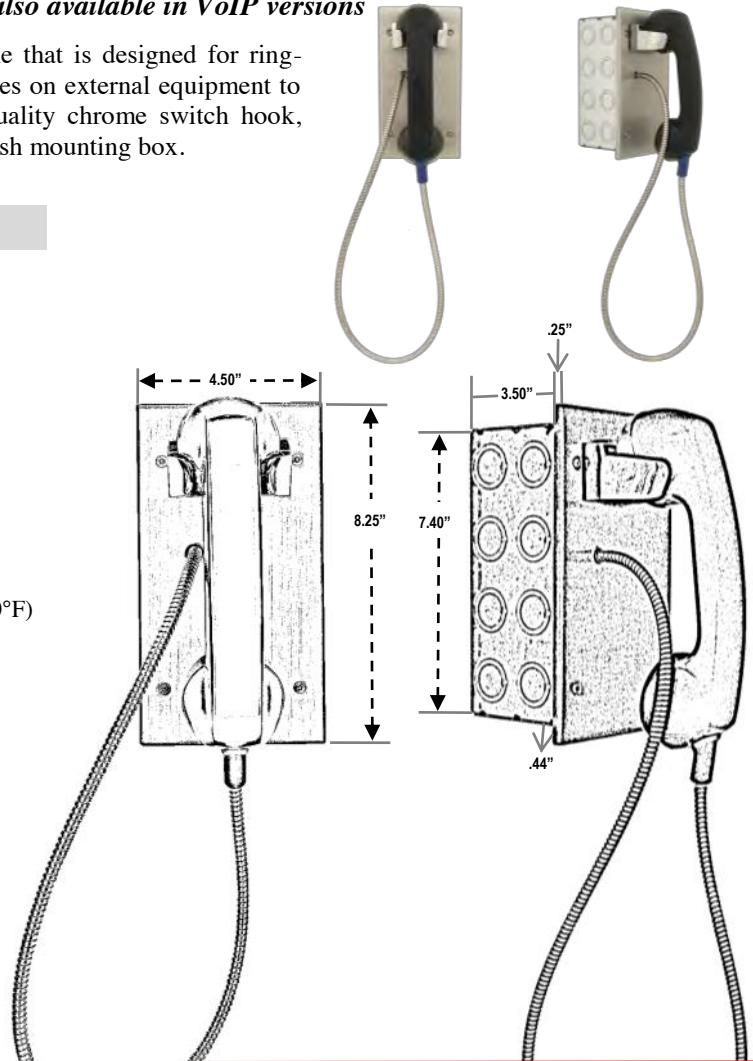
COMPACT FLUSH MOUNTED TELEPHONE WITH HANDSET AND AUTODIAL FOR RING-DOWN OPERATION

Standard Analog Power, but also available in VoIP versions

Compact vandal resistant stainless steel flush mount telephone that is designed for ring-down operation. The phone will accept incoming calls and relies on external equipment to control calling. Constructed of stainless steel with marine quality chrome switch hook, tamper resistant security screws, and includes a 4-gang style flush mounting box.






SPECIFICATIONS

Panel Size:	4.50" W x 8.25" H 3.50" D (Behind Panel) 3" D (Front Panel & Handset on Hook)
Weight:	Approximately 6 lbs.
Mounting:	Flush Mounted 4-gang metal masonry box Dimensions: 3.75"W x 7.40"H x 3.50" D
Programming:	Via Mini Jumpers
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensing
Input Power:	Telephone Line Powered
Loop Current:	23mA min to 80mA max
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
Hearing Aid Compatible:	Meets EIA standards
UL& FCC Registration:	Certified
ACCESSORIES:	301-064 Security Tool (required for installation)



ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-M	-LB	-ACH**	4 Gang Metal Masonry Box	301-064
				
Sealed Magnetic Hookswitch <ul style="list-style-type: none"> Completely Sealed No Moving Parts 	32" handset with internal steel lanyard (braided metal rope) anchored into bracket installed on panel for added strength	Optional armored cord lengths from 12" to 72". Example: -ACH18 (18" armored cord handset).	4-gang metal masonry box flush mounting box Dimensions: 3.75"W x 7.40"H x 3.50" D	Security installation tool, required for installation



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

<http://www.ceeco.net>
Email: sales@ceeco.net

519 SW Park Street

Okeechobee, FL

Voice 863-357-0798

Fax 863-357-0006