

# SSP-550-X SPECIFICATIONS

## HANDSFREE SPEAKERPHONE PANEL WITH AUTODIAL PUSH BUTTON FOR LOW POWER CONSUMPTION AND RING-DOWN CAPABILITY


*Standard Analog Power, but also available in VoIP versions*

Durable mini stainless steel flush mount handsfree low power consumption speakerphone for emergency and courtesy communication. Designed for ring-down operation with red LED light to indicate phone is activated. Press red button to initiate and disconnect call. Telephone can be programmed to cancel calls after 1, 3, or 5 minutes or no call time-out. Phone relies on external equipment to control calling. Equipped with weatherproof, puncture resistant speaker and microphone, and tamper resistant security screws.



### SPECIFICATIONS

<b>Panel Size:</b>	5"W x 7"H 2"D (Behind Panel) 2.5" D ( Behind Panel w/ rough-in mounting box)
<b>Weight:</b>	Approximately 5 lbs.
<b>Mounting Instructions:</b>	Flush Mounted 4 Mounting holes on front panel Spaced: 4" x 6"
<b>Environment:</b>	Temperature: -30°C (-22°F) to 50°C (130°F) Humidity: 20%-90% non-condensating
<b>Programming:</b>	VIA Mini Jumper
<b>Input Power:</b>	Telephone Powered Line
<b>Loop Current:</b>	27mA min to 80mA max
<b>Impedance:</b>	600 ohms
<b>FCC &amp; UL:</b>	Certified
<b>Type Jack:</b>	RJ11C
<b>Ringer Equivalency:</b>	0.4A
<b>UL &amp; FCC Registration:</b>	Certified
<b>Accessories:</b>	301-037 Security Tool (required for installation when installed in vertical rough-in mounting box)

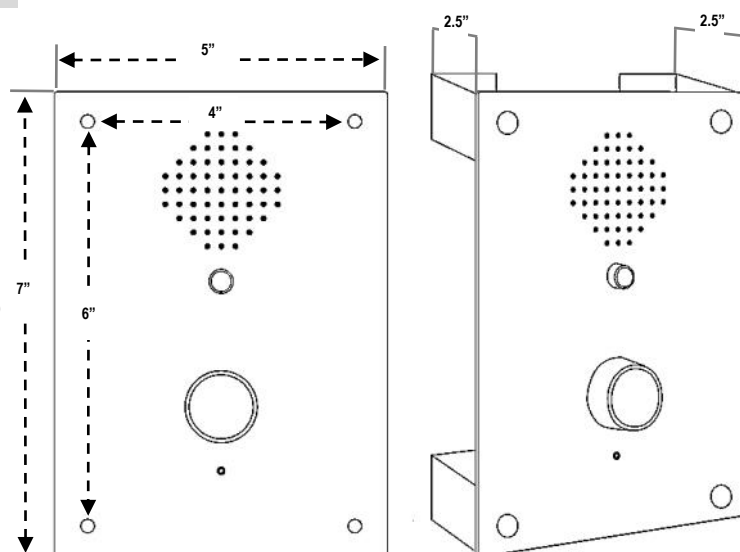

**IP - Voice over Internet Protocol Version available on all models (SIP)**



*Providing Telecommunication Solutions Since 1930*

Communication Equipment  
& Engineering Company

<http://www.ceeco.net>  
Email: [sales@ceeco.net](mailto:sales@ceeco.net)

519 SW Park Street  
Okeechobee, FL

Voice 863-357-0798  
Fax 863-357-0006