

# SSP-561-F SPECIFICATIONS

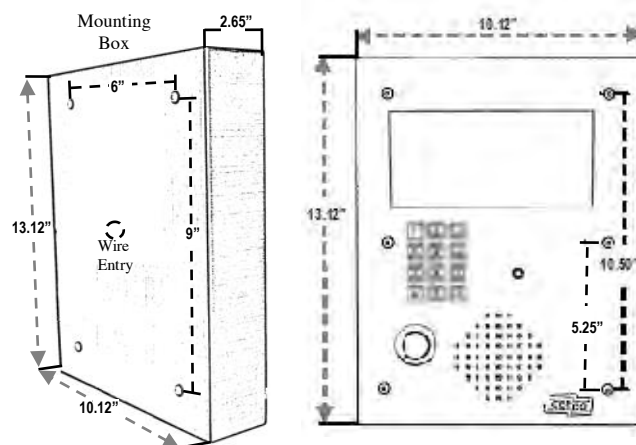
## LARGE FLUSH OR WALL MOUNTED HANDSFREE SPEAKERPHONE WITH KEYPAD




Robust heavy gauge stainless steel flush mount or surface mount panel handsfree speakerphone with keypad for dialing, push button for dial tone, and red/green LED light provides visual indication of call progress. Telephone can be programmed with call restrictions, ability to dial a PBX or access number, allow or block incoming calls, and provide timed call-out from 1-9 minutes or no time-out. Built with marine quality chrome tone dial keypad, weatherproof, puncture resistant speaker and microphone, instruction or advertising window, and tamper resistant security screws. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Optional (-SW) stainless steel surface mount box available.



### SPECIFICATIONS

<b>Panel Size:</b>	10.12"W x 13.12"H 2"D (Behind Panel) 2.65"D (With Wall Mounting Box)
<b>Weight:</b>	Approximately 6 lbs.
<b>Mounting Instructions:</b>	Rough-in flush mounting box <b>(Standard)</b> Dimensions: 8.50" W x 11.50"H x 2.75" D 3 mounting holes per side of panel spaced 5.25" apart vertically and two holes spaced 7.8" apart horizontally Surface Wall Mounting Box <b>(-SW)</b> 4 holes spaced 6W" x 9H"
<b>Environment:</b>	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
<b>Programming:</b>	Via Keypad
<b>Input Power:</b>	Telephone Line Powered
<b>Loop Current:</b>	30mA min to 80mA max
<b>Impedance:</b>	600 ohms
<b>Type Jack:</b>	RJ11C
<b>Ringer Equivalency:</b>	0.4A
<b>UL &amp; FCC Registration:</b>	Certified
<b>ACCESSORIES:</b>	301-037 Security Tool (required for installation When in a Box)



ADDITIONAL OPTIONS		IP - Voice over Internet Protocol Version available on all models (SIP)	
-SW	-RIL	Standard rough in mounting box	Additional Options & Features
			Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
Stainless steel wall/surface mounting box	Ring Indicator Light located on the phone panel for visual ring indication.	Rough-in flush mounting box Dimensions: 8.50" W x 11.50"H x 2.75" D	



*Providing Telecommunication Solutions Since 1930*

Communication Equipment  
& Engineering Company

<http://www.ceeco.net>  
Email: [sales@ceeco.net](mailto:sales@ceeco.net)

519 SW Park Street  
Okeechobee, FL

Voice 863-357-0798  
Fax 863-357-0006