

SSP-571-D2 SPECIFICATIONS


STAINLESS STEEL HANDSFREE SPEAKERPHONE PANEL WITH AUTODIAL PUSH BUTTON

Reliable stainless steel handsfree panel speakerphone that is designed to automatically dial a preprogrammed number from 1-11 digits when the button is pushed. If there is no answer when first number is dialed, phone will reset itself and dial a second preprogrammed number and red light to indicate phone is activated. Press button to disconnect call. Capable of dialing a PBX or access number, block or allow incoming calls, and provides call duration time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with a black push button, tamper resistant security screws and weatherproof, puncture resistant speaker and microphone. Optional 371-011 mounting box, 371-012 frame available.



SPECIFICATIONS

Panel Size:	6.80"W x 9.87"H 2.75"D (Behind Panel) 3" D (w/ Optional Mounting Box)
Weight:	Approximately 7 lbs. Approximately 10 lbs. w/optional mounting box and frame
Mounting:	Flush Mounted Four holes proved on front panel Spaced: 6"W x 9"H Optional Mounting Box available (371-011) Box Dimensions: 7"W x 10"H x 3" D Box Requires: mounting frame (371-012) and four mounting brackets (371-009) Frame Dimensions: 9.56"W x 11.54"H
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
Programming:	VIA DTMF keypad
Input Power:	Telephone Line Powered
Loop Current:	30mA min to 80mA max
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
UL & FCC Registration:	Certified
ACCESSORIES:	301-064 Security Tool

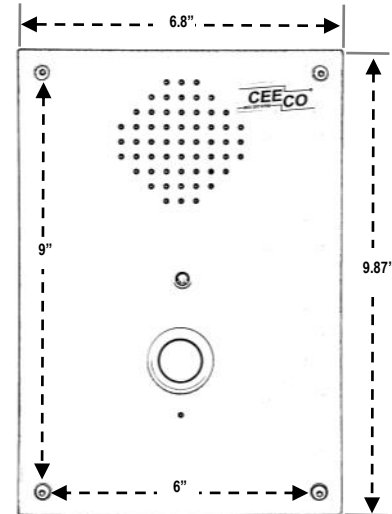

ADDITIONAL OPTIONS		IP - Voice over Internet Protocol Version available on all models (SIP)		
-ADA	371-011 Mounting Box	371-012 Mounting Box Frame	371-009 Mounting Bracket	Additional Options & Features
				Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
<ul style="list-style-type: none"> Red/ green LED call progress indicator light Braille Emergency Plate "EMERG. PHONE" Red Push Button 	Mounting Box that requires the 371-012 frame Dimensions: 7"W x 10"H x 3" D	Frame for mounting box required with purchase of 370-011: Dimensions: 9.56" W x 11.54"H four spaced holes 7.32"W x 10.35" H	Mounting bracket for 571/570 series telephone. 4 brackets are required	



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

<http://www.ceeco.net>
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL

Voice 863-357-0798
Fax 863-357-0006