






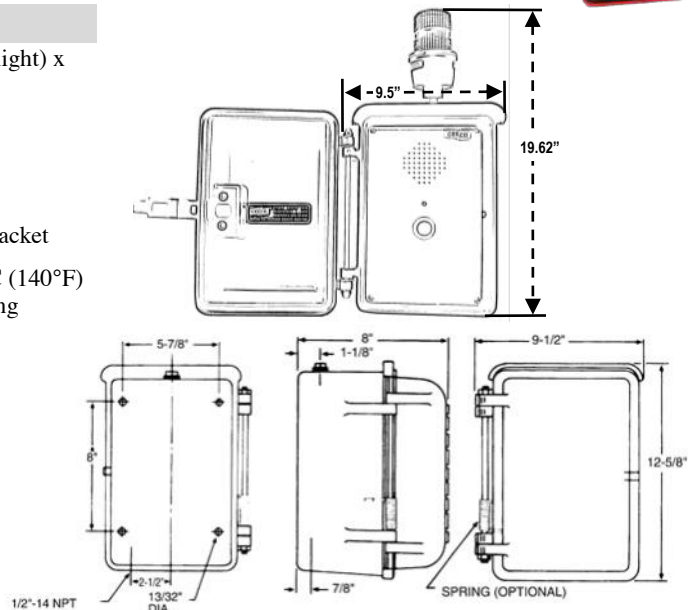

**HANDSFREE SPEAKERPHONE WITH PUSH-BUTTON AUTODIAL &
BLUE STROBE LIGHT IN A WEATHERPROOF HOUSING**

<u>Weatherproof Housing:</u>	9 1/2"W x 19 5/8"H (Including the light) x 8"D (Including Door)
<u>Weight:</u>	Approximately 19 lbs.
<u>Mounting Instructions:</u>	Weatherproof Housing 4 holes spaced 8" x 5 7/8" Also available pole mounting bracket
<u>Environment:</u>	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
<u>Programming:</u>	Via DTMF Keypad
<u>Input Power:</u>	Telephone Line Powered
<u>Loop Current:</u>	30mA min to 80mA max
<u>Impedance:</u>	600 ohms
<u>Type Jack:</u>	RJ11C
<u>Ringer Equivalency:</u>	0.4A
<u>UL & FCC Registration:</u>	Certified
<u>ACCESSORIES:</u>	301-064 Security Tool (required for installation)



IP - Voice over Internet Protocol Version available on all models (SIP)

-ADA	Weatherproof Housing	-ST/-SB/-RST	-RIL	-SP	Pole Mount	Additional Options & Features
						Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
<ul style="list-style-type: none"> • Red/ green LED call progress indicator light • Braille Emergency Plate "EMERG. PHONE" • Red push button 	Standard Black & TELEPHONE on Door -B-EMER Black & EMERGENCY on Door -R Red & EMERGENCY on Door -R-TEL Red & TELEPHONE on Door -Y Yellow & EMERGENCY on Door -Y-TEL Yellow & Telephone on Door -G Grey & TELEPHONE on Door -G-EMER Grey & EMERGENCY on Door	Blue Strobe Light option: <ul style="list-style-type: none"> • Steady on • Flashing • For location visibility • <i>Requires AC power</i> 	Ring Indicator Light located on the phone panel for visual ring indication.	Spring loaded door option	Pole Mounting bracket fits poles 2.5" - 6".	



Providing Telecommunication Solutions Since 1930

Fax 863-357-0006