
WPP-531-FD-ST SPECIFICATIONS

HANDSFREE SPEAKERPHONE WITH KEYPAD, PUSH BUTTON AUTODIAL & BLUE STROBE LIGHT IN A WEATHERPROOF HOUSING

Distinctly noticeable blue light emergency handsfree speakerphone for both indoor and outdoor locations. Constructed with a stainless steel panel phone and a cast aluminum weatherproof black housing with TELEPHONE on door with pin latch, wall or pole mount, and flashing strobe light that will activate when user makes a call. Designed with a keypad for dialing and an autodial button. Push button to initiate call and red/green LED light provides visual indication of call progress. Telephone can be programmed with call restrictions, ability to dial a PBX or access number, allow or block incoming calls, provide call time-out from 1-9 minutes or no time-out. Autodial button dials a preprogrammed number from 1-11 digits. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with a marine quality chrome tone dial keypad, weatherproof, puncture resistant speaker and microphone and tamper resistant security screws. ADA (American Disability Act) features available. Blue light option is also available in a steady burning light (-SB) for location identification or a flashing blue light that activates when an incoming call is received (-RST). Waterproof enclosures are offered in black, (-R) red, (-Y) Yellow, or (-G) Gray with TELEPHONE or EMERGENCY on door



with TELEPHONE or EN	IERGENCY on door		
SPECIFICATIONS	0 1/2"W - 10 5/0"H (In the line the line)		
Weatherproof Housing:	9 1/2"W x 19 5/8"H (Including the light) 8"D (Including Door)		
Weight:	Approximately 19 lbs.		
Mounting Instructions:	Weatherproof Housing 4 holes spaced 8" x 5 7/8" Also available pole mounting bracket		
Environment:	Temperature: -30°C (-22°F) to 60°C (140 Humidity: 0%-90% non-condensating		
Programming:	Via DTMF Keypad		
Input Power:	Telephone Line Powered		
Loop Current:	30mA min to 80mA max		
Impedance:	600 ohms		
Type Jack:	RJ11C		
Ringer Equivalency:	0.4A		
UL & FCC Registration:	Certified 1/2*-141		
ACCESSORIES:	301-064 Security Tool (required for installation)		

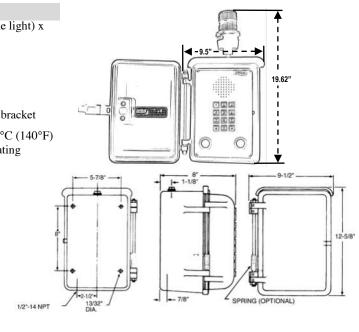

ADDITIONAL OPTIONS	IP - Voice over Internet Protocol Version available on all models (SIP)					
-ADA	Weatherproof Housing	-ST/-SB/-RST	-RIL	-SP	Pole Mount	Additional Options & Features
ENERG PHONE BRACKERS		ŧ	0		Ë)	Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
 Red/ green LED call progress indicator light Braille Emergency Plate "EMERG. PHONE" Red push button 	Standard Black & TELEPHONE on Door -B-EMER Black & EMERGENCY on Door -R Red & EMERGENCY on Door -R-TEL Red & TELEPHONE on Door -Y Yellow & EMERGENCY on Door -Y-TEL Yellow & Telephone on Door -G Grey & TELEPHONE on Door -G-EMER Grey & EMERGENCY on Door	Blue Strobe Light option: • Steady on • Flashing • For location visibility • Requires AC power	Ring Indicator Light located on the phone panel for visual ring indication.	Spring loaded door option	Pole Mounting bracket fits poles 2.5" - 6".	

CEECO

Providing Telecommunication Solutions Since 1930

Communication Equipment	519 SW Park Street
& Engineering Company	Okeechobee, FL
http://www.ceeco.net	Voice 863-357-0798
Email: sales@ceeco.net	Fax 863-357-0006