




OM3 Simplex/Duplex Patch Cord

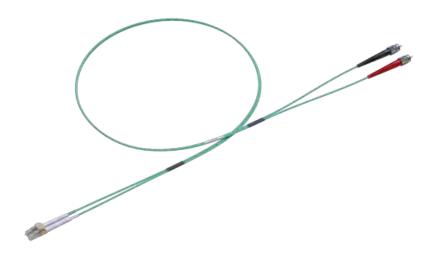

Multimode patch cords are used to connect high speed and legacy networks like 10 gigabit ethernet, fast ethernet and ethernet. The multimode patch cords are manufactured using LSZH cables which conform to IEC, EIA TIA or Telcordia standards. The OM3 patch cords are terminated with standard connectors which gives optimum optical performance.

FEATURES

- FC, LC, MTRJ, SC and ST connectors
- Low smoke zero halogen (LSZH) cable in aqua or purple colour
- 900 μm / 600 μm tight buffer
- OM3 fibre conforms to ITU-T G.651.1, TIA/EIA 492AAAC, IEC60793-2-10 Ala.2a
- Simplex and duplex assemblies
- Duplex assemblies available with clips (SC and LC)
- Different connector performance range for specific application available
- Armoured option also available

APPLICATIONS

- For use in 10Gb/s high speed LAN networks over a 300m indicative link length at 850nm (SX) wavelength using a laser launch
- For use in 1Gb/s high speed LAN networks over a 1000m indicative link length at 850nm (SX) wavelength using a laser launch
- High speed and legacy networks including Gigabit Ethernet, Fast Ethernet and Ethernet
- Data centers
- Premises cabling in data networks including backbone, riser and horizontal
- Supports video, data and voice services

SPECIFICATION

CONNECTOR SPECIFICATION

OPTICAL PERFORMANCE MULTIMODE CONFORMANCE
IL Max/Master (Acceptance) 0.25dB IEC 61300-3-4
Ave/Master 0.15dB IEC 61300-3-4
Ave/Random 0.20dB IEC 61300-3-34

Note: Return Loss >28dB based on sample data using method IEC 61300-3-6

CABLE SPECIFICATION

CHARACTERISTICS	SIMPLEX	DUPLEX
Cable Material	LSZH	LSZH
Strength Member	Aramid	Aramid
Crush (N)	1000	1000
Operating Temperature (°C)	-20 to 60	-20 to 60

CHARACTERISTICS SIMPLEX DUPLEX
Fire Specification IEC 60332-1 IEC 60332-1

FIBRE SPECIFICATION

CHARACTERISTICS

Attenuation (dB) / km 2.8 @ 850nm / 0.8 @ 1310nm Bandwidth OFL (MHz x km) 1500 @ 850nm / 500 @ 1310nm

Bandwidth LEMB (MHz X km) 2000 @ 850nm

ORDERING INFORMATION

Connector End A			Connector End B			
FC	FC		FC	FC		
FCA	FCA		FCA	FCA		
sc	SC		SC	SC		
SCA	SCA		SCA	SCA		
ST	ST		ST	ST		
LC	LC		LC	LC		
LCA	LCA		LCA	LCA		
MU	MU		MU	MU		
MTRJ	MTRJ*		MTRJ	MTRJ*		
E2	E2000		E2	E2000		

Mode	Cable Configuration					
ОМ3 ОМ3	S	Simplex				
	D	Duplex				
	FD	Flat Duplex				

Cable Colour		Cable Length		
AQ	Aqua	1	1 metre	
PU Purple		2	2 meter	
		3	3 meter	
		5	5 meter	
		10	10 meter	
		хх	Specify	

/Z

EXAMPLE PART NUMBER

FC	SC	ОМ3	S	PU	3	/ Z

This part number has created a 3 metre simplex FC to SC OM3 patch cord in purple.

Please contact our sales team on +44 (0) 1908 441 121 for further ordering information.

CONTACT OUR SALES TEAM TODAY

Europe: +44 1908 441 100 | sales@optronicsnet.com
Americas: +1 410 242 9026 | sales@optronicsnet.com
Asia Pacific: +86 755 2531 3694 | apac@optronicsnet.com
Middle East & Africa: +971 4 443 1028 | mea@optronicsnet.com

Web: www.optronicsnet.com

Downloaded from www.optronicsnet.com | Information correct as of June 19, 2015 | Optronics reserves the right to make changes to the product specifications in this datasheet at any time without notice. All content © Optronics 2015

^{*} MTRJ is only available in MiniZip duplex