



Building Entrance Terminals

INDOOR - CABLE STUB TERMINATION SERIES - BET



1900-25

25 PAIR - INDOOR BET - 25' CABLE STUB/25' CABLE STUB - COVER

Product Specifications


UL 497 Primary Protector for Communication Circuits

NAFTA Country of Origin: CANADA - All Loaded and Unloaded Models are "Buy America Act" Approved.

Circa's cable stub units offer the user a variety of installation and splicing options depending on application specific requirements. Custom cable stub lengths are available upon request. Standard stub length on the 1900 Series, stub to stub, is 25 feet. These units are also available with stubs in/out of equal length in 50 or 100 feet. The 1900A1-100K model can also be ordered with both stubs coming from the bottom or top. The units have an internal fuse link and use industry standard 5-pin protection modules.

Features & Benefits

- 16AWG Powder Coated Steel Construction
- External Ground Connectors Accept 6 - 14 AWG Wire
- Industry Standard 5 Pin Design
- Exceeds UL497 Primary Protection Standards
- Equipped with Heavy Duty Strain Relief and Encapsulated Cable Connector
- Custom Cable Lengths Available in 25' Increments

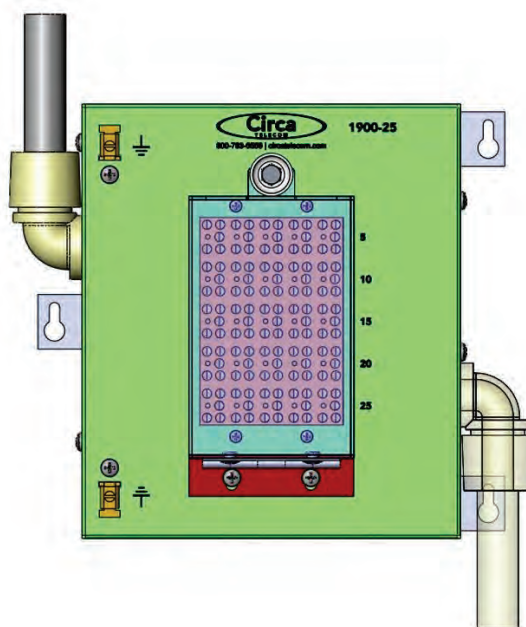

1900-25

Ordering Information

Model Number	Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
1900-25	214014A25A25	25	Cable	Cable	9.53 x 7.88 x 4.05	12.5

Cable Type: 24AWG 25' Shielded CMR Input 0.38 dia o.d. - 24AWG 25' Shielded CMR Input 0.38 dia o.d.

Circa Telecom, Inc © 2013 - Version 1.03

6914 W. Linebaugh Ave - Tampa, FL 33625
Phone 800.783.6556 - Fax 813.676.2060 - Email circatech@circa telecom.com - www.circa telecom.com



Building Entrance Terminals

INDOOR - CABLE STUB TERMINATION SERIES - BET




1900-25

25 PAIR - INDOOR BET - 25' CABLE STUB/25' CABLE STUB - COVER

Physical Dimensions

UL 497 Primary Protector for Communication Circuits

9.53 x 7.88 x 4.05
(H" x W" x D")

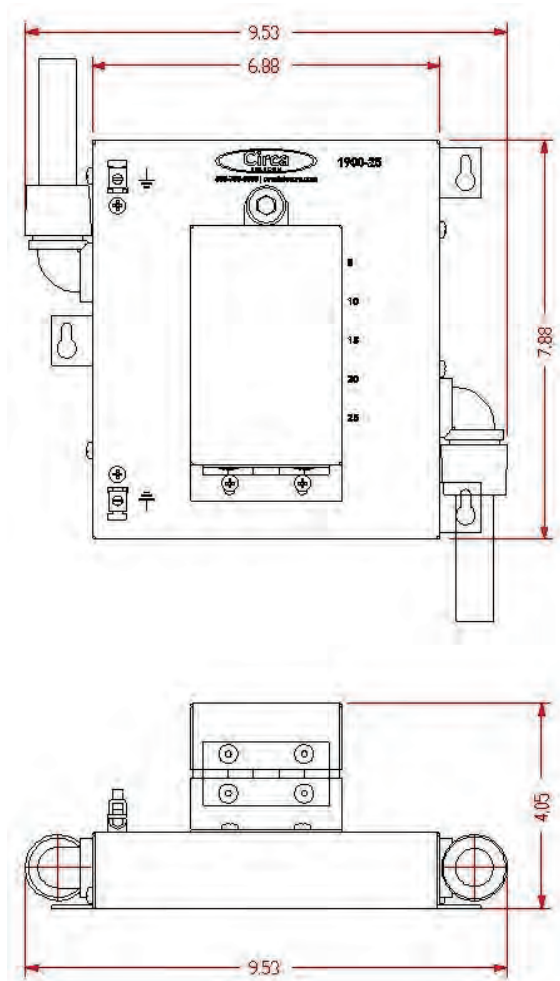

Notes

Cable Type: 24AWG 25' Shielded CMR Input 0.38 dia o.d. - 24AWG 25' Shielded CMR Input 0.38 dia o.d.

Indoor Wall Mount

Custom cable lengths available in 25' increments