THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.030	W ±.010	C ±.015	M ±.020	H ±.010
PV22-4F	#4	.67 (17.02)	.20 (5.08)	.21 (5.33)	.56 (14.22)	.12 (3.05)
PV22-6F	#6	.76 (19.30)	.25 (6.35)	.26 (6.60)	.62 (15.75)	.14 (3.56)

NOTES:

1. RECOMMENDED FOR:
   A. 600V MAX. VOLTAGE RATING
   B. #26-22 AWG SOLID OR STRANDED COPPER WIRE
   C. 221° F (105° C) MAX. TEMP. RATING

2. MATERIAL:
   A. STAMPING - .020 [0.51] THK, COPPER, TIN PLATED
   B. HOUSING - VINYL, YELLOW

3. PACKAGE QTY: STD PKG. -CY =100
   BULK PKG. -MY =1000

4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

5. INSTALLATION TOOLS: CT-520, CT-1525 (POCKET A)

6. WIRE STRIP LENGTH: 3/16" + 1/32" - 0 [4.8mm +.8 - 0]

Panduit part numbers shown on this drawig meet the material requirements of RoHS (European Directive 2002/95/EC on the Restriction of Hazardous Substances) as proposed by the Technical Adaptation Committee.

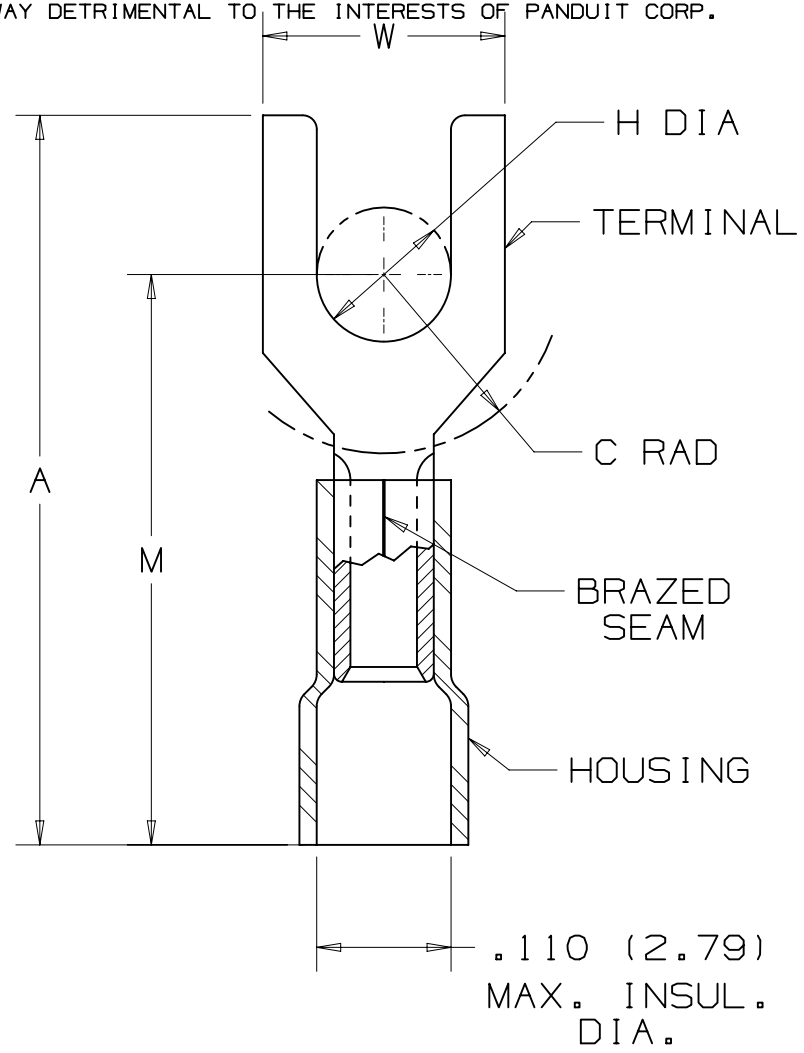

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	1/15	JHNU	TMR	RGB	ADDED WIRE STRIP LENGTH NOTE REVISED TITLE BLOCK	N41232BA-DC

TITLE

#26-22 BARREL VINYL INSULATED FORK, .110 [2.79] MAX WIRE INSUL. DIA.

CUSTOMER DRAWING

ITEM REVISION NAME: N41232BA/09

DATASET FILE NAME: N41232BA/09

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ±

.XX ± ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41232

DRAWN BY	DATE	CHK	SCALE	SIZE
DAW		CH	N/A	A

SHT 1 OF 1

D10100DA/16