



Maximal1RD

Overview

Maximal1RD rack mount access power controller distributes and switches power to access control systems and accessories. It converts a 115VAC 50/60Hz input into sixteen (16) independently controlled 12VDC or 24VDC PTC protected outputs. Outputs are activated by a normally open (NO) or normally closed (NC) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. This unit will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the outputs.

Specifications***Input:***

- 115VAC 60Hz, 1.9 amp.
- Normally closed [NC] or normally open [NO] dry contact inputs (switch selectable).

Outputs:

- 12VDC @ 4 amp or 24VDC @ 3 amp total output current.
- Sixteen (16) PTC protected outputs.
- Maximum current per ACM8R-M output is 2 amp.
- Individually selectable Mag Lock/Strike (Fail-Safe, Fail-Secure) solid state fuse protected outputs.
- Thermal and short circuit protection with auto reset.

Fire Alarm Interface:

- Latching or Non-Latching fire alarm reset switch individually selectable for each output.
- Remote reset capability for latching Fire Alarm Interface mode.
- Fire Alarm disconnect input options:
 - a) Normally open [NO] or normally closed [NC] dry contact input.
 - b) Polarity reversal input from FACP signaling circuit.

Visual Indicators:

- Individual Output Status LEDs located on the front panel.

Battery Backup:

- Built-in charger for sealed lead acid or gel type batteries (if batteries are required install separate enclosure).

Battery Backup (cont'd):

- Maximum charge current 0.7 amp.
- Automatic switch over to stand-by battery when AC fails.
- Zero voltage drop when unit switches over to battery backup (AC failure condition).

Supervision:

- AC fail supervision (form "C" contact).
- Low battery and battery presence supervision (form "C" contact).

Additional Features:

- Removable terminal blocks with locking screw flange.
- 3-wire line cord.
- Illuminated master power disconnect circuit breaker with manual reset.

Electrical:


- Operating temperature: 0° C to 49° C ambient.
- BTU/Hr.:
 - 12VDC: 24.57 BTU/Hr.
 - 24VDC: 37.1 BTU/Hr.
- System AC input VA requirement: 218.5VA.

Mechanical:

- Dimensions (H x W x D approx.):
3.25" x 19.125" x 8.5"
(82.55mm x 485.78mm x 215.9mm)
- Product weight (approx.): 10.7 lbs. (4.85 kg).
- Shipping weight (approx.): 12.7 lbs (5.76kg).

Enclosure Dimensions (*H x W x D approximate*):
3.25" x 19.125" x 8.5" (82.55mm x 485.78mm x 215.9mm)

REAR

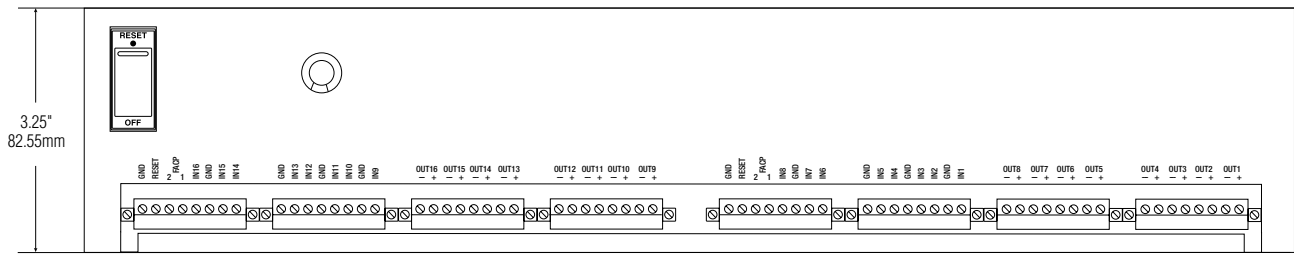

TOP & BOTTOM



FRONT

