## VIDEO WALLS SOLUTIONS

ORION Images RNK Video Wall series has Immediate Benefits for Security Room, Retail, Shopping Mall, Corporation, Broadcast, Transportation, Government, Health Care, Casino and more

# RNK42NNF

ORION Images is leading the market as being an expert in control room solutions for broadcasting, telecommunications, public utilities, process control, traffic control, surveillance and command & control applications. Our LCD video wall solutions are ideal for Emergency Operations Centers, traffic and surveillance centers, and utilities and process control rooms. The RNK series is the perfect solution for displaying 1 image across multiple monitors using 1 video source up to a 20 x 20 configuration.

















### Video Walls for Security, Control Rooms, Commercial AV, Professional AV & has immediate benefits for:

In addition, this solution can also be used for corporate AV and Digital Signage applications such as shopping malls, airports, stadiums, lobby signage, boardrooms, and more. Whether small lobby display or extra large video walls, the tiled RNK series makes statement. Public Display Signage receives 10 times the eye contact of static signage and is creating cost-effective opportunities to improve customer service, safety, way finding, branding, training, and communications.

Unlike plasma technology, LCD video walls require less power consumption and with auto pixel shift built in they are not subject to permanent, irreversible burn-in. Unlike individual mount LCD's that leave gaps between each monitor, tiled video walls offer more flexibility, scalability and the possibility for a higher resolution.







#### VIDEO WALL SOLUTIONS SECURITY/CONTROL ROOM/AV

#### **SPECIFICATIONS**

	RNK42NNF
Bezel Width	
Top / Bottom / Left / Right	13.4mm / 13.4mm / 13.4mm / 13.4mm
Display	
Screen Size	42.02 Inch
Max. Resolution	1920 x 1080 @ 60Hz
Pixel Pitch	0.4845 x 0.4845mm
Brightness	450cd/m²
Contrast Ratio	1300 : 1
Aspect Ratio	16:9
Viewing Angle	178° / 178°
Display Color	1.06 Billion (8bit)
Response Time	< 12ms (Gray to Gray)
Video System	NTSC / PAL
Interface	
Video In / Out (BNC Type)	2/2
HDMI In / Out	1/1
VGA In / Out (15Pin D-Sub)	1/1
DVI-D In / Out	1/1
RS232 In / Out	1/1
PC Stereo In	1
Audio In (RCA Type)	2 (L + R)
Speaker Out	1
Audio	
Built In Speaker	10W x 2
Transmitter	
IR Remote Control	Yes
Features	
Multi Display Function	PBP / PIP
Temperature Sensor	N/A
Filter Type	3D Comb Filter
De-Interlace	Yes
Noise Reduction	Yes
One Image Up to 20 x 20	Yes
Auto Fan Control System	N/A
Auto Pixel Shift	Yes
Trigger Source Switching	Yes Yes
Auto Source Switching	Yes
Edge Setting (Horizontal / Vertical)  Advance Auto Power Recovery	Yes
Multi Language	English, Spanish, French, German, Italian
RS-232C Control	Monitor OSD control using PC
Outline Dimension	
Dimension (W x H x D)	37.83" x 21.80" x 3.7"
Net. Weight	24.5kg (54.01 lbs)
Warranty	
Part / Labor	3year / 3year
Circumastance	
Operating Temperature	0° ~ 40° C / 32° ~ 104° F
Power	
Electrical Ratings	AC 100 ~ 240V (50/60Hz)
Power Consumption	< 128W
Mount	
VESA™ Mount Size	600 x 300mm
Video Wall	WFS, WES, WSD
Stand Alone	WB-4663

#### SOFTWARE

#### Video Wall Control Management S/W features:


- Extremely easy to use
- Ocontrol each display Separately or All at once
- Select 1 or multiple monitor viewing configurations
- Multi Vision options: example 5x5 (boarder) from DVI and 3x3 (in the center)
- Schedule a sequence of multiple display content configurations
- File Management Save and store edited contents for easy replay access
- Select input source
- Menu lock out (IR or panel)
- Power control On / Off
- O Color setting (RGB) & Brightness
- Edge setting (horizontal & vertical gap)

#### **HARDWARE**

#### Hardware features:

- Spread 1 image across multiple monitors using 1 video source
- Onfigure up to a 20 x 20
- Video Wall Processor built in
- Remote Display Management
- Landscape and Portrait
- DHDMI In / Out
- DVI-D In / Out
- VGA In / Out
- RS-232C In / Out for pc / server control
- Ocontrol panel Lock (panel or IR)
- All metal chassis
- Auto power recovery
- Auto pixel shift
- DIP / PBP Dual signal In
- VESA standard hole patterns

#### INTERFACE

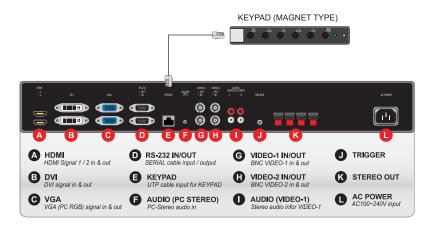


#### **MOUNTS**









\*Design and specifications are subject to change without notice





