



Quam

INDIVIDUAL LOUDSPEAKERS

25C25Z450T

MOISTURE RESISTANT

2-1/2" O.D. loudspeaker, 2.35 oz. magnet,
45Ω impedance, moisture resistant

GENERAL DESCRIPTION

The **25C25Z450T** is a 2-1/2" square frame loudspeaker with a 2.35 oz. ceramic magnet, 45 Ohm nominal impedance and a moisture resistant cone.


INTENDED USE - Indoor and Outdoor Environment

Program Material	Signal tones, voice and music
Installation	Loudspeaker mount is a #8-32 tapped hole, center rear of device

AUDIO SPECIFICATIONS

Frequency Response	200 Hz - 6kHz
Power Handling¹	4W
Impedances Available	45
Cone Finish Options	Weather-Resistant
Magnet Material	Ceramic
Weight	2.35 oz
Depth	1.090 in

¹Loudspeaker Power Rating per EIA 426A

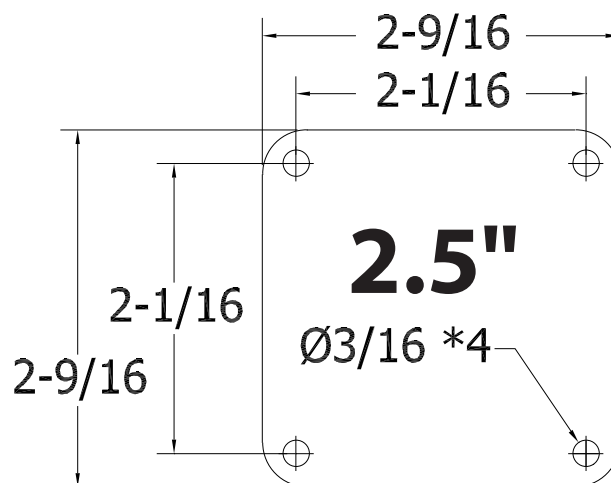

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at:
www.QuamSpeakers.com

© 2013 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC.
234 East Marquette Rd.
Chicago, IL. 60637
Tel: 1-800-NEED-NOW (800-633-3669)
Fax: 1-888-NEED-NOW (888-633-3669)
e-mail: NeedNow@QNC.com
www.QuamSpeakers.com