

MODEL:

SR48UBEXPNDNR3

SmartRack® Heavy-Duty Open Frame Rack



48 Rack Units



3000 lb
Stationary
Load Rating



3000 lb
Rolling
Load Rating



3-Inch Heavy-Duty
Casters



Accommodates
Standard
19-inch
Equipment




Toolless
Mounting Slots



Adjustable
Rails with
Easy-View
Depth Index




Integrated
Baying Tabs



Square Hole
Mounting

- A** Adjustable Mounting Rails (4)
- B** Adjustable PDU Mounting
Rails with Toolless Mounting Slots
(2 rails hold up to 4 vertical PDUs)
- C** 3-Inch Heavy-Duty Casters (4)
- D** Heavy-Duty Levelers

Also Includes: Owner's manual, 2 stabilizing brackets and rackmount equipment mounting hardware (50 cage nuts, 50 mounting screws, 50 nylon cup washers)

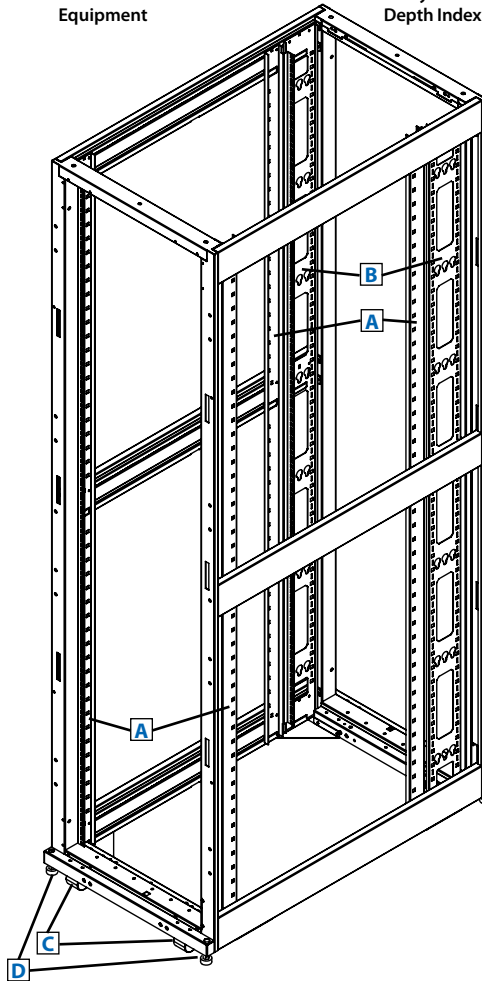

Specifications

Model	SR48UBEXPNDNR3
Rack Spaces	48U
Stationary Load Capacity	3000 lb (1363 kg)
Rolling Load Capacity	3000 lb (1363 kg)
Unit Dimensions (H x W x D)	89 x 23.63 x 43 in. (2261 x 600 x 1092 mm)
Shipping Dimensions (H x W x D)	95 x 26 x 45 in. (2413 x 660 x 1143 mm)
Unit Weight	163 lb (74 kg)
Shipping Weight	213 lb (96.6 kg)
Standards	Tested to UL 60950, RoHS, CE, NOM, EIA/ECA-310-A, IEC 60297-3-100, DIN41494

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.





- Enclosure ships fully assembled for rapid deployment, but can be knocked down for easy reassembly in confined spaces
- Does not include side panels to allow for baying of several racks in high-density applications
- Modular design optimized for quick configuration and reconfiguration
- Ideal for rackmount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.triplite.com

Also Available: Shock pallet models with special packaging to facilitate equipment pre-installation and reshipment to final site. Heavy-duty shock pallet holds up to 1250 lb (568 kg), including the weight of the enclosure and pre-installed equipment. Add "SP1" to model numbers above to order shock pallet models.

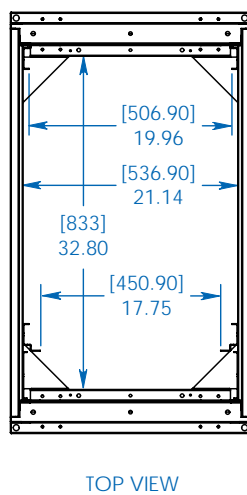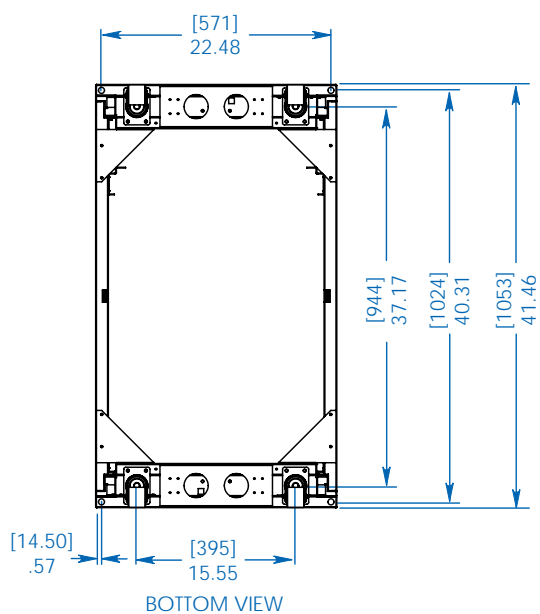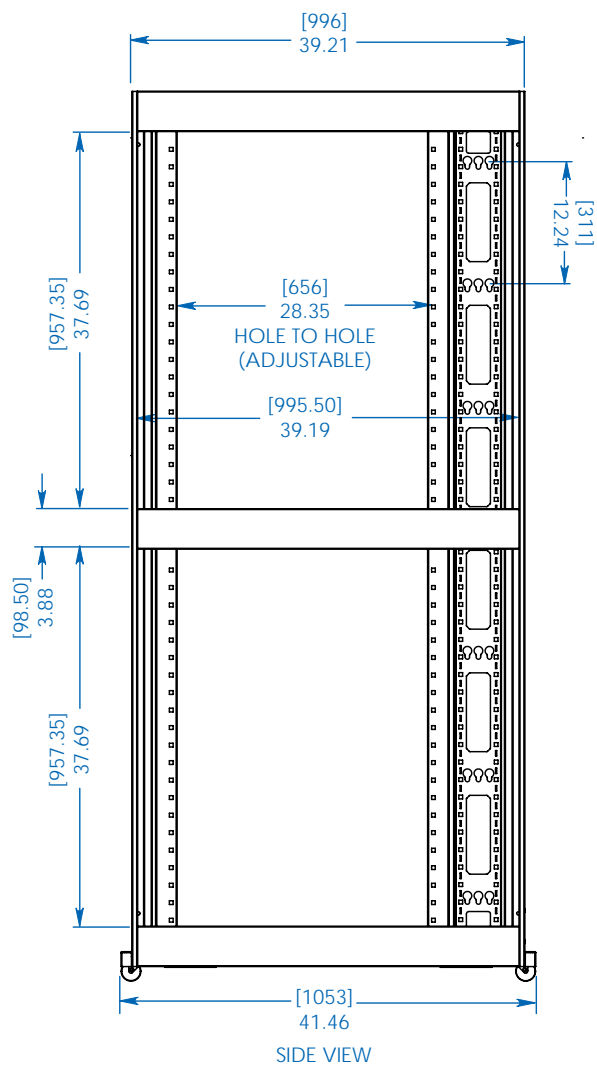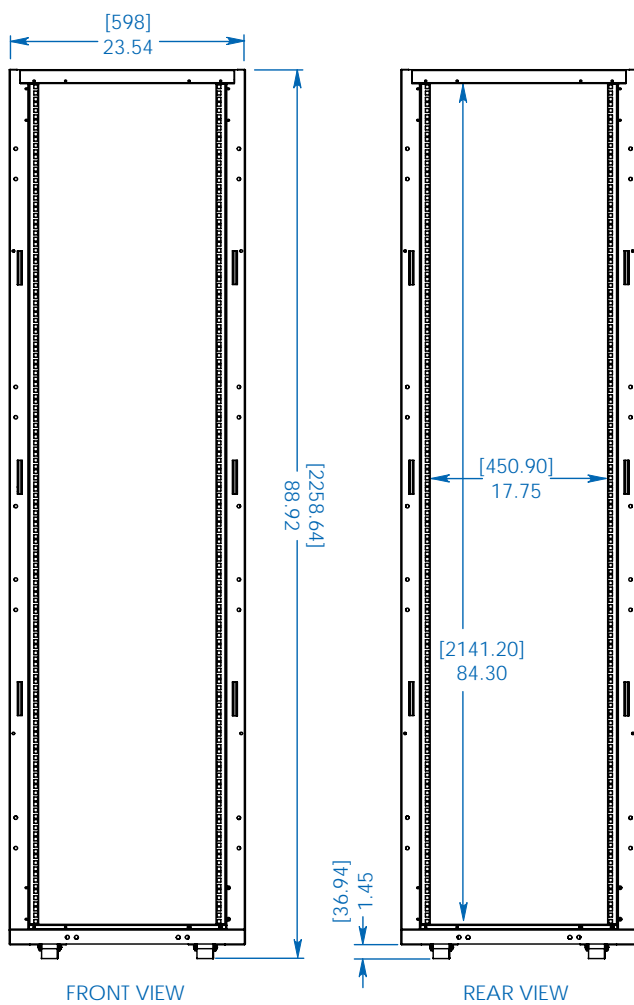

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
SR48UBEXPNDNR3



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.trippelite.com