


NOTES:
1. IDENTIFICATION: VERTICAL, MIXED (24) C-13 & (6) C-19, METERED
230V / 16A / SINGLE-PHASE

<u>PART NO.</u>	<u>COLOR</u>
VB1D2A0BA30P1	BLACK


2. ACCESSORY COMPONENTS:

- (4) M6 x 20mm MOUNTING SCREWS
- (4) #12-24 x 1/2" MOUNTING SCREWS
- (2) #10-32 LOCKING COLLAR SCREWS
- (2) L-BRACKETS


4. POWER METER - RED, 4-DIGIT LED CONTINUOUSLY SCROLLS THROUGH POWER FACTOR, AMPS, VOLTS (RMS), AND REAL POWER IN WATTS (RMS).
5. UNIT COMPLIES WITH IEC 60950-1, EN55022, EN55024, GOST, AND IS CE MARKED.
6. RoHS COMPLIANT.
7. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
8. MAXIMUM AVAILABLE INPUT POWER = 3.7 KW
9. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.

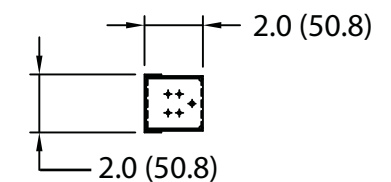

A diagram of a circular container, possibly a petri dish, with a thick black border. Inside the container, there are three dots: two black dots and one green dot. The dots are arranged in a triangular pattern, with the green dot on the right and the two black dots on the left.



SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19

MODEL FILENAME		09V098NK/01.PRT	
CAD FILENAME/LAYERS		09V098NK_DC/01A.PRT	
			
VERTICAL, MIXED (24) C-13 & (6) C-19, METERED POWER OUTLET UNIT CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: INCHES X.X +/- 0.03 X.XX +/- 0.015 X.XXX +/- 0.005		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	
[METRIC - MILLIMETER] X +/- 0.8 X.X +/- 0.4 X.XX +/- 0.13		ANGLE +/- 1°	
DRAWN BY MAV		SCALE NONE	
DATE 2-10-11		DRAWING NO. 09V098NK	
CHK'D KRKE		DWG B	