

suprema FaceStation

Next Generation Face Recognition Terminal



| FaceStation |

The new FaceStation is a dedicated face recognition terminal which provides a perfect combination of convenience and high security. Optimizing Suprema's renowned biometric technology combined with state-of-the-art hardware, FaceStation allows fast and accurate access control security like no other product in the market. FaceStation comes with a wide array of features & functions, which can be assessed through a intuitive touch screen GUI. The device also features embedded web server for easier device control, and supports both analog and digital video phone integration.



Suprema FaceStation

Next Generation Face Recognition Terminal



Features



Intelligent Face Recognition Technology

Allows fast & easy recognition with higher security



Intuitive Touch Screen GUI

4.3" touchscreen LCD with easy-to-use GUI



Embedded Web Server

Preloaded with BioStar Lite embedded web server



Ultra Performance

Covers up to 10,000 users with powerful dual CPU



Versatile Interfaces

PoE, WiFi, TCP/IP, RS485/232, Wiegand, relay



Video Phone

IP based video and audio interface or analog video phone



Built-in Card Reader

13.56MHz Mifare/DesFire

Intuitive touch screen GUI of FaceStation



Specifications


CPU	1.1 GHz DSP, 667MHz RISC
Memory	4GB flash, 512MB RAM
LCD	4.3 inch WVGA touch screen
Camera	Face recognition, face log, videophone
RF Card Options	13.56MHz Mifare/DesFire
Template Capacity	10,000 (1:1), 1,000 (1:N)
Max User	10,000
Log Capacity	1,000,000 / 10,000 image logs
PoE	Yes
Interfaces	Wireless LAN(optional), TCP/IP, Wiegand 2ch RS485, RS232, 4 x TTL I/O, 2 x Relay USB (Host & Slave)
Tamper	Switch
Sound	16 bit Hi-Fi voice & sound indication
Operating Temp.	-20°C ~ 50°C
Operating Voltage	12V DC
Dimensions (mm)	132(W) x 165(H) x 60(D)
Certificates	CE, FCC, KCC, RoHS

Secure I/O

- External Relay unit for secure door control and I/O expansion


- Encrypted communication for enhanced security

- * 16MHz 8 bit microprocessor
- * 4 digital inputs and 2 relay outputs
- * Dimension :
143 x 82 x 35 mm (W x H x D)




System Configuration


Standalone



Secure



Network

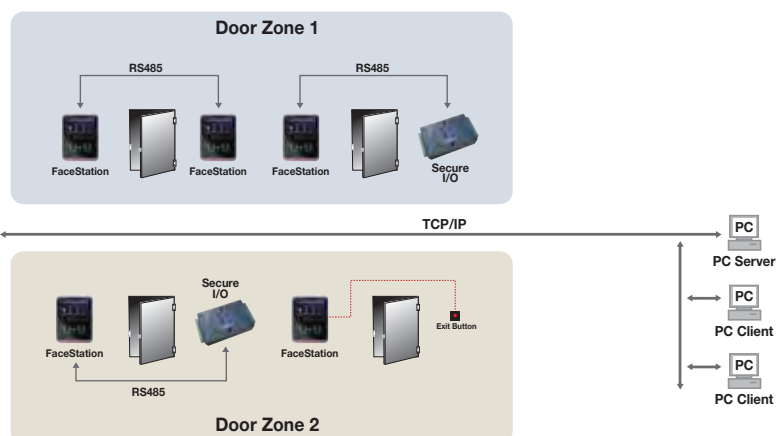

ENTERTECH SYSTEMS is based in North America and dedicated to helping you successfully promote and sell the Suprema product line

Sales Contact 905 582 5110 | sales@entertechsystems.com
Support Contact 905 582 5110 | support@entertechsystems.com
Remote Desktop Support www.entertechsystems.com/support

QuickStart Guide www.entertechsystems.com/quickstart
Training www.entertechsystems.com/youtube
Warranty Info www.entertechsystems.com/rma



ENTERTECH SYSTEMS

©2012 Suprema, Inc. Suprema and identifying product names and numbers herein are registered trade marks of Suprema, Inc. All non-Suprema brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice.