




Model 38-52-CCOAP Model 1052 Retrofit Door- Cisco WAPs

Category: Retrofit Doors for Oberon Enclosures



This locking retrofit door is designed to provide a convenient way to mount and secure Cisco wireless access points in 1051 and 1052 Series WAP enclosures. Simply unlock door and remove three nuts from hinge to replace door. Simplify equipment replacement without lifting ceiling tiles.



Features

- Simplifies compliance with industry standards and guidelines for Retail (PCI), Healthcare (ICRA), and Government deployments
- Secure, Convenient, Aesthetic

Specifications

- Adaptor door designed to mount the Cisco 1040/1140/1260/3500/3600 series 802.11n wireless access point into existing Oberon Model 1052-00 ceiling tile enclosures
- Use Cisco AIR-AP-BRACKET-1 for 3600 series and AIR-AP-BRACKET-2 for 3500 series
- With adaptor door properly installed, the assembly is UL listed and designed to meet NEC300-22 and 300-23 for installations in the air handling space, OSHPD approved [OPM-0110-13-10 \(.pdf\)](#)
- Construction: Textured white powder-coated steel, 14 ga. door
- Fully hinged locking door, keyed alike. Door can be replaced to migrate to new access points.
- Adaptor door is attached to enclosure with (3) nuts

Includes

- Adaptor door
- Assembly mount bracket and nuts
- Installation Instructions


Documentation Links

[Spec Sheet](http://oberonwireless.com/index.php?option=com_content&view=article&id=1282&Itemid=399) - oberonwireless.com/index.php?option=com_content&view=article&id=1282&Itemid=399

[Installation Instructions](http://oberonwireless.com/images/WebDocs/Model38-52-CCOAP_Installation_Instructions.pdf) - oberonwireless.com/images/WebDocs/Model38-52-CCOAP_Installation_Instructions.pdf

[Customer Prints](http://oberonwireless.com/images/WebDocs/Model38-52-CCOAP_Customer_Print.pdf) - oberonwireless.com/images/WebDocs/Model38-52-CCOAP_Customer_Print.pdf

Dimensional Images

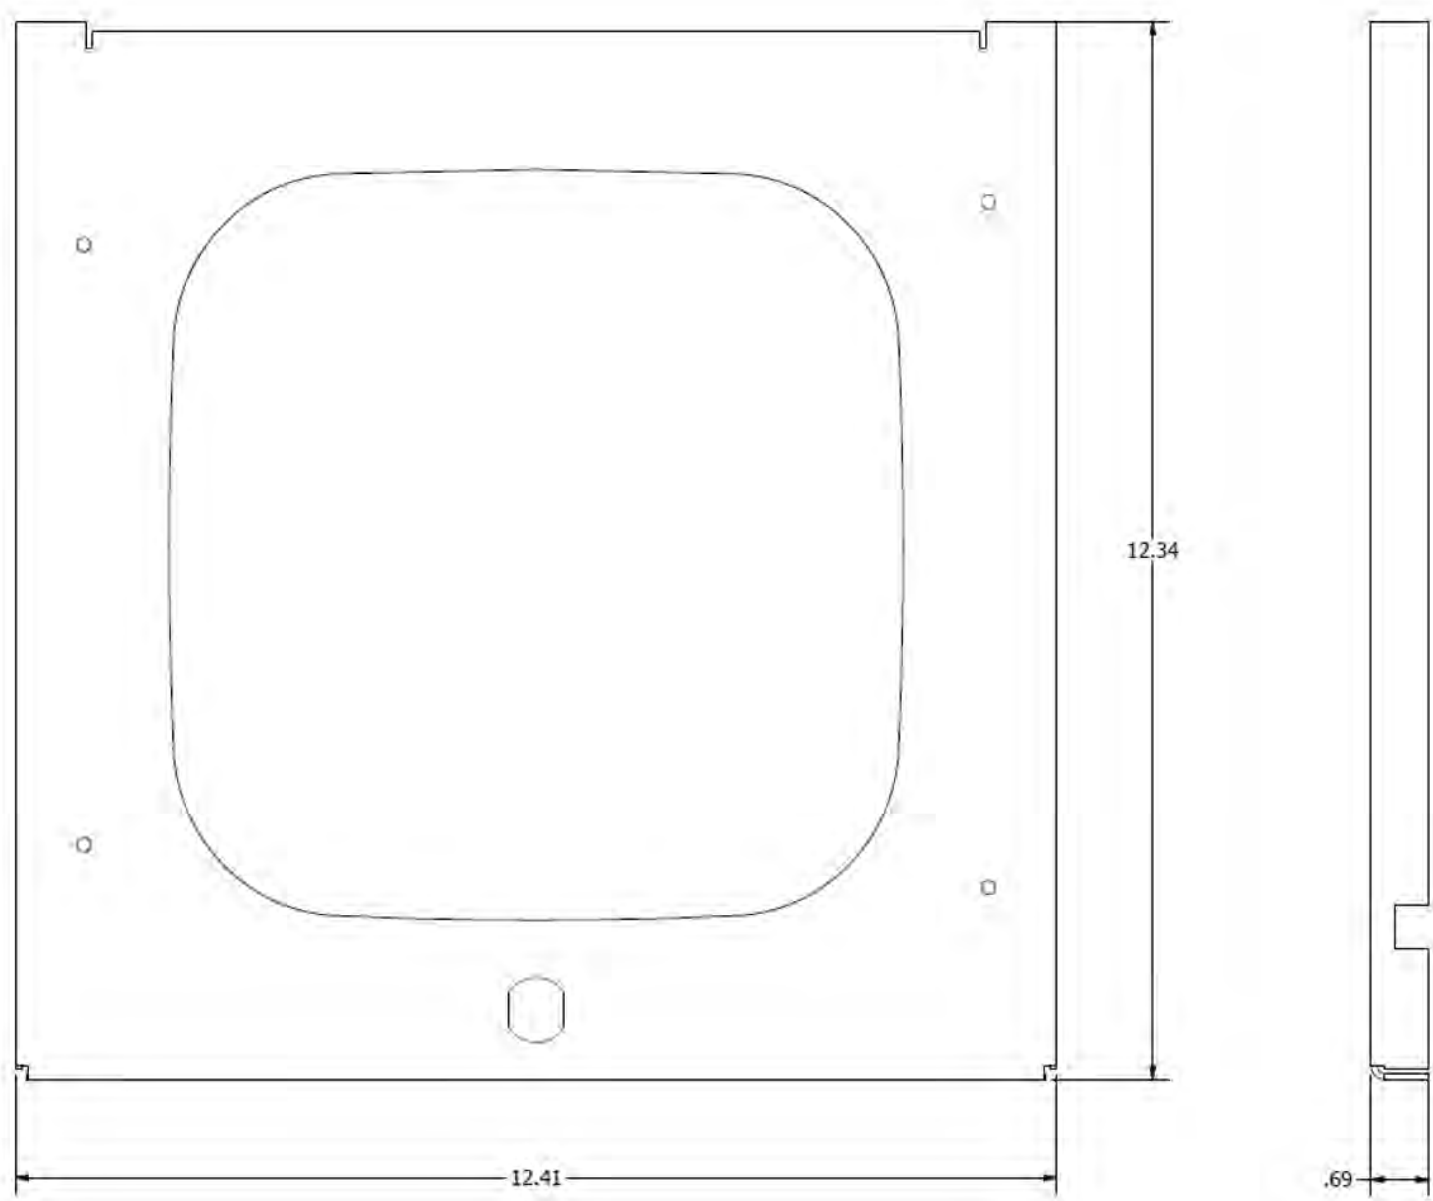

Images and documents may depict similar models in the product series.