

Low-Profile Universal Projector Mount


Model: **PDS-PLUS,
PDS-PLUS-W**

Weight Capacity: 75 lb / 34.1 kg.

Features

- 1** OSHPD and DSA approved (OPA-1787-07), as well as UL Listed
 - 2** Lock-It™ security hardware and leveling barrel provide strong protection
 - 3** Mates to standard 1.5 in. NPT or directly to structural surfaces
- Cable routing through body
 - Slotted mounting base with six interchangeable legs (four long and two short) to reach wider mounting points
 - Low profile universal projector mount can be mounted directly to ceiling
 - Available in black (PDS-PLUS) or white (PDS-PLUS-W)

The PDS-PLUS(-W) is a low-profile universal projector mount that can be mounted directly to the ceiling. It features a slotted mounting base with six interchangeable legs (four long and two short) to reach wider mounting points. The PDS-PLUS(-W) mates to standard 1.5 in. NPT pipe, or directly to structural surfaces. It also includes Lock-It™ security hardware, and is OSHPD approved and UL listed. PDS-PLUS is available in black, as well as white (Model: PDS-PLUS-W).



Slotted mounting base with six interchangeable legs (four long and two short)



Patented Lock-It™ security hardware and leveling barrel provide protection



Can mate with a standard 1.5" NPT or directly to structural surfaces

Low-Profile Universal Projector Mount

PDS-PLUS, PDS-PLUS-W




Specifications

| | | | |
|--|------------------------------------|--|---|
| Color PDS-PLUS Black PDS-PLUS-W White | Weight 4.92 lb. 2.2 kg | Weight Capacity / Mount 75 lb. 34.1 kg | Height 2.8 in. 71 mm |
| Roll +7.50°/-7.50° | Pitch +16.50°/-16.50° | Yaw 360° If Mounted to Pipe 42.00° If Mounted Directly to the Ceiling | Mounting Reach 16.43 in. 417 mm |
| | | | Warranty Lifetime |


Packaging

| | |
|---|--|
| Length x Width x Height 11.75 x 11.63 x 6.38 in. 298 x 295 x 162 mm | Contents PDS-PLUS Assembly (x1), M6 Key Lock (x1), Hardware Kit (x1) |
|---|--|

Accessories

| | | |
|---|--|--|
|  <p>Plenum Rated False Ceiling Equipment Storage w/ Pipe Coupler GB-AVSTOR5</p> |  <p>False Ceiling Adapter w/ Quick-Lock Cable PP-FCTA-QL</p> |  <p>Adjustable Height Ceiling Adapter (13 - 21 in.) AST-1321</p> |
|---|--|--|

Architectural Drawing

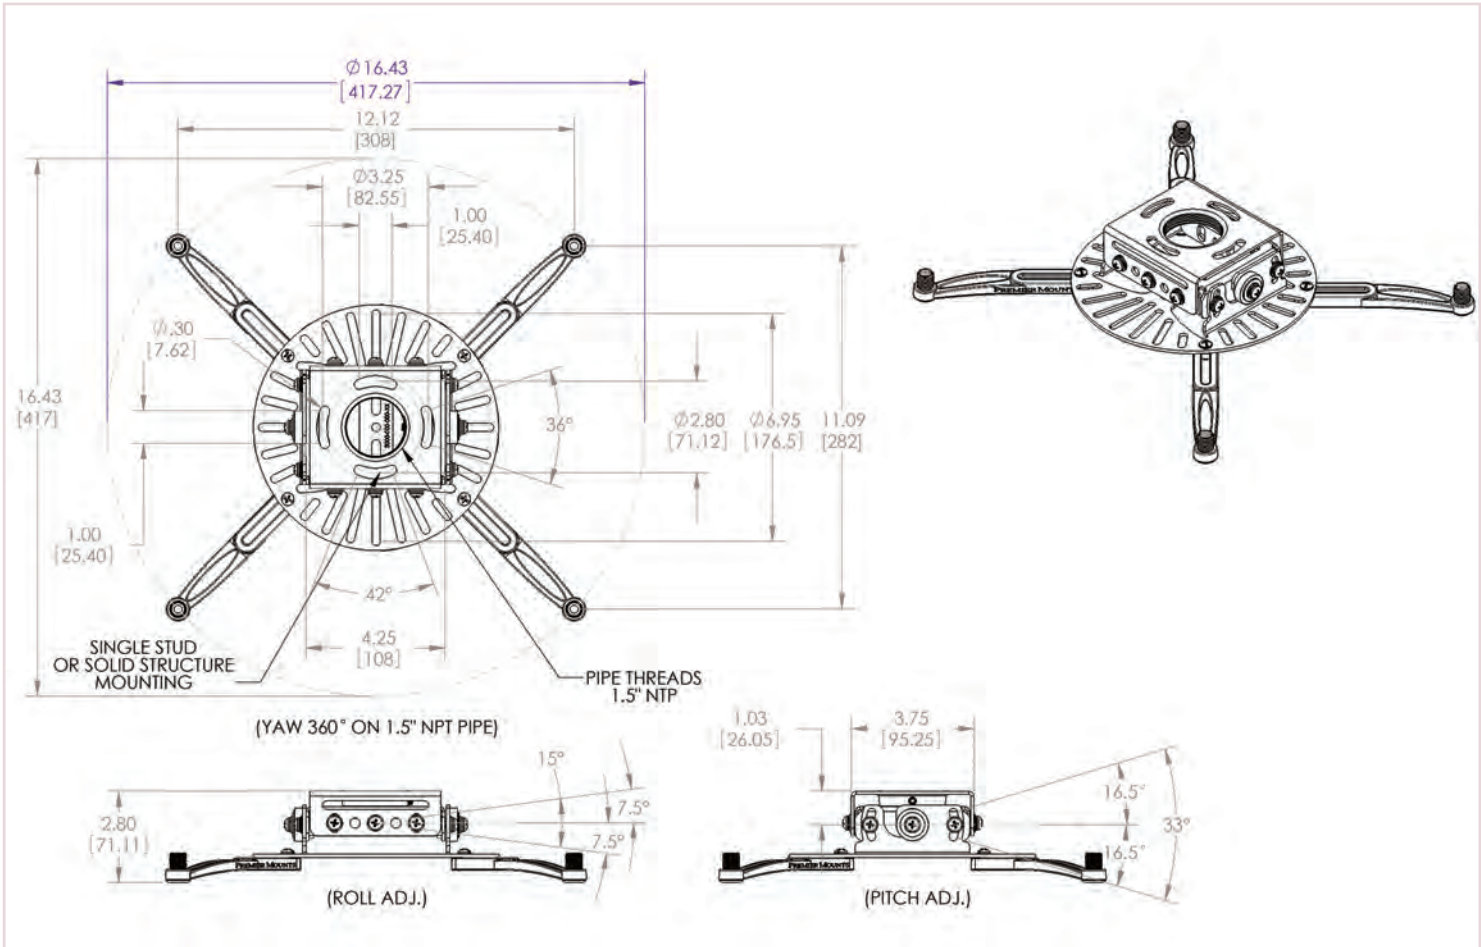

Specifications subject to change without notice