

WRENCHES

ADJUSTABLE/CONSTRUCTION/STRUCTURAL

Snap-on INDUSTRIAL BRANDS

WILLIAMS

RATCHETING ADJUSTABLE WRENCHES

Comfort Grip

Product Code	Overall Length (Inches)	Maximum Jaw Opening (Inches)	Head Thickness (Inches)
13106	6	$1\frac{1}{16}$	$\frac{7}{16}$
13108	8	$1\frac{5}{16}$	$\frac{9}{16}$
13110	10	$1\frac{3}{4}$	$1\frac{1}{16}$

13343 3 Piece Set Ratcheting Adjustable Wrench Set, in Pouch

Contents Include:

Product Code	Size (Inches)	Product Code	Size (Inches)
13106	6	13110	10
13108	8		

Features

- Easy to use in limited space



13110

WILLIAMS

ADJUSTABLE CONSTRUCTION WRENCH

Heavy-Duty With Polished Head and Measurement Scales

Product Code	Length (Inches)	Maximum Jaw Opening (Inches)	Head Thickness (Inches)
13625A	15	$1\frac{1}{2}$	$2\frac{3}{32}$

Features

- Tapered spud handle locates and aligns bolts and rivets.
- Hole in handle permits tethering wrench for safety.
- Measurement scale on head conveniently shows fastener size.
- Economical black phosphate finish resists rust.



13625A

WILLIAMS




SINGLE HEAD OPEN END OFFSET STRUCTURAL WRENCHES

Industrial Black Finish, SAE

Product Code	Size (Inches)	A Overall Length (Inches)	B Open End Width (Inches)	C Open End Thickness (Inches)	D Handle Offset (Inches)
1904A	$\frac{3}{4}$	$11\frac{9}{16}$	$1\frac{19}{32}$	$\frac{15}{32}$	$\frac{7}{8}$
1905	$\frac{7}{8}$	$14\frac{5}{16}$	2	$\frac{9}{16}$	1
1906	$1\frac{5}{16}$	$14\frac{3}{16}$	$1\frac{31}{32}$	$\frac{19}{32}$	1
1906B	1	$14\frac{1}{4}$	2	$\frac{19}{32}$	1
1907	$1\frac{1}{16}$	$16\frac{13}{16}$	$2\frac{5}{32}$	$\frac{5}{8}$	$1\frac{1}{8}$
1907A	$1\frac{1}{8}$	$16\frac{13}{16}$	$2\frac{1}{4}$	$\frac{5}{8}$	$1\frac{1}{8}$
1908	$1\frac{1}{4}$	$17\frac{11}{16}$	$2\frac{23}{32}$	$\frac{11}{16}$	$1\frac{1}{4}$
1908A	$1\frac{5}{16}$	$18\frac{3}{4}$	$2\frac{13}{16}$	$\frac{23}{32}$	$1\frac{1}{4}$
1909	$1\frac{7}{16}$	$19\frac{3}{4}$	$3\frac{3}{32}$	$\frac{25}{32}$	$1\frac{1}{4}$
1909A	$1\frac{1}{2}$	$19\frac{7}{8}$	$3\frac{5}{32}$	$\frac{25}{32}$	$1\frac{1}{2}$
1910	$1\frac{5}{8}$	$21\frac{1}{16}$	$3\frac{7}{32}$	$\frac{7}{8}$	$1\frac{1}{2}$
1911	$1\frac{13}{16}$	23	$3\frac{3}{4}$	$1\frac{3}{4}$	$1\frac{5}{8}$
1911A	$1\frac{7}{8}$	$22\frac{13}{16}$	$3\frac{25}{32}$	$\frac{31}{32}$	$1\frac{5}{8}$
1912	2	$23\frac{3}{4}$	$4\frac{7}{32}$	$\frac{31}{32}$	$1\frac{5}{8}$

Features

- Long offset handle is designed for clearance of obstructions while providing greater leverage.
- Tapered spud handle locates and aligns bolt and rivet holes.

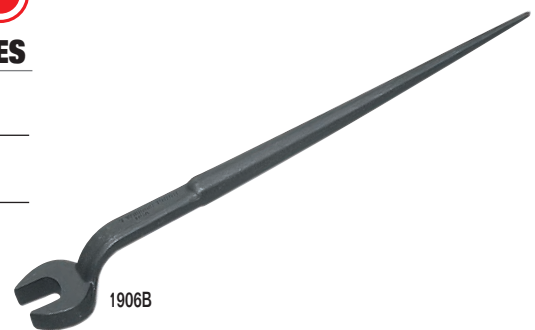

1906B

