

Four Way Power Splitter

7-16 DIN Female, 698-2700MHz

RFPS-4C-DF

Low PIM

Low VSWR

Other Configurations Available

50 Ohms Impedance

RoHS Compliant

IP67 Rated



GENERAL SPECIFICATIONS

Device Type	Power Splitter
Interface	7-16 DIN Female
Color	Black
Weight.....	2.8 lb
Dimensions.....	11.25" L x 3.2" W x 2.35" H
Bracket Included.....	No

ELECTRICAL SPECIFICATIONS


Operation Frequency Band.....	698-2700 MHz
3rd Intermodulation	≤-155 dBc min (relative to carrier)
3rd Intermodulation Test Method.....	Two +43 dBm carriers
Average Power	500 Watt
Impedance.....	50Ω
Insertion Loss	<0.25dB@698-2700 MHz
Peak Power	3Kw
Split Loss	.6dB
VSWR.....	≤ 1.25

MECHANICAL SPECIFICATIONS

Inner Contact Plating.....	Silver
Outer Plating.....	White Bronze (Tri-Metal)

ENVIRONMENTAL SPECIFICATIONS

Application	Indoor/Outdoor
Operating Temperature.....	-30°C~+75°C; -22°F~+167°F
Relative Humidity	Up to 100%
Regulatory Compliance / Certifications.....	RoHS / IP67

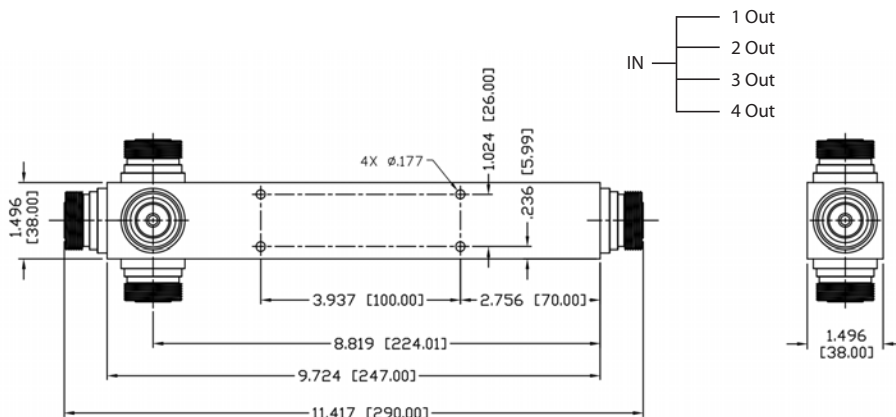

RF Industries

(NASDAQ: RFI)

7610 Miramar Road
San Diego, CA 92126
(800) 233-1728
(858) 549-6340
Fax: (858) 549-6345
rfi@rfindustries.com
www.rfindustries.com