

specifications

The Gateway EPA064 is installed as part of a primary/secondary topology and provides support for up to four connected power devices, six environmental sensors, and two access control devices all through a single IP address. The gateway consolidates all data captured from the connected power devices and sensors and displays baseline operational data through a web interface or via SmartZone™ Software platforms. The gateway supports keypad or card reader devices to provide cabinet access control. The gateway supports the "open" Simple Network Management Protocol (SNMP) to allow monitoring for conditions that warrant administrative attention via any network management system that supports the SNMP protocol, as well as supporting HTTP/HTTPS protocols for remote management capabilities.



technical information

Dimensions:	19 in. x 4.5 in. x 1.7 in. (483mm x 115mm x 44mm)
Weight:	4.19 lbs. (1.9Kg); 5.73 lbs. (2.6Kg) packaged
Packaging:	1.54 lbs. (0.7Kg)
Mounting:	19" rack mountable unit, housed in a 1RU metal case

key features and benefits

Centralized device management	Captures inputs from up to four connected power devices, six environmental sensors and two access control devices into one intelligent gateway to consolidate monitoring and management of operational data, simplify troubleshooting, and allow faster polling of data
Single IP address	Allows all connected power devices and sensors to be combined through one single Gateway IP address, reducing the need for separate IP ports, IP capital costs, and management overhead
Primary/secondary network topology	Houses the intelligence and power supply for connected devices within the gateway itself to simplify the network architecture and lower overall power consumption
Access and control security	Powers access control card readers or keypads on cabinets and manages encrypted access data to support smart card technologies and other readers that enhance data center security
SNMP enabled	Uses open SNMP protocol to provide alerts (traps) on potential service impacting power and environmental conditions to mitigate operational downtime
HTTP/HTTPS web interface	Provides authentication safeguards to securely allow users to configure, monitor, and control the gateway through remote management
SmartZone™ Software platform integration	Consolidates power and environmental data to be utilized by SmartZone™ Software platforms for real-time monitoring and display, management, and automated documentation

applications

The SmartZone™ Gateway EPA064 is an innovative, SNMP based gateway that simplifies the management of power devices and sensors with one IP address, significantly reducing the number of IP addresses needed in the data center. This management information can then be displayed via an internal web interface or utilized by SmartZone™ Software platforms for real-time monitoring, management, and automated reporting of operational metrics. SmartZone™ Gateways are scalable solutions, ideally suited to brownfield or greenfield data centers and telco areas.

The SmartZone™ Gateway EPA064 supports up to four connected power devices, six environmental sensors and two access control devices. To enhance cabinet security, the Gateway EPA064 supports keypads or HID card readers, which, when used with electronic handles, provide secure access to the cabinet.

SmartZone™ Gateway EPA064

Gateway EPA064 test data

Power Supply	
Input Power	100~240 VAC
Input Connector	1 x IEC C14 Inlet
Power Consumption	(Max.) 40W
Additional Information	Isolated Supply
Internal PSU	Single
Factory Build Option	Dual
Operating Environment	
Operating Temperature	32°F to 113°F (0°C to 45°C)
Storage Temperature	14°F to 158°F (-10°C to 70°C)
Operating Humidity	15% to 85% RH
Storage Humidity	5% to 90% RH
MTBF	>100,000 Hrs.
Connectivity and Networking	
Network Type	Ethernet (802.3u)
Network Connection	RJ45
Link Speeds	10/100 Mbps with auto negotiation
Network Indications	Connection LED (Green); Network Speed LED (Yellow)
Sensors	
Number of Inputs	6 sensor inputs
Input Connector	8-way RJ45
Parameters Monitored	Temperature, humidity, smoke, door contact, shock, water, PIR, airflow sensors, and any 0-10 VDC output sensor
Temperature Monitoring Range	32°F to 140°F (0°C to 60°C)
Temperature Monitoring Accuracy	±5% Standard Transducer @68°F (20°C)
Humidity Monitoring Range	30% to 90% relative humidity
Humidity Monitoring Accuracy	±5% RH @ 77°F (25°C)
Analogue Resolution	12 Bit A/D for analogue inputs
Additional Information	Inputs are not isolated; auto detection of supported sensors
Access and Control	
Access	2 ports that support 2x5 Keypad or HID Card Reader
Control	2 relay output ports for controlling flashing beacons, or electronic handles
PDU Monitoring and Control	
Number of Inputs	4 inputs for connected power monitoring devices
PDU In/Out Connector	RJ45
Parameters Monitored	Volts, amps, total kVA, total kWh, total power factor and frequency (dependent on PDU)
Output Relays	
Number of Outputs	2
Output Connectors	WeidMuller
Output Connections	Normally Open, Common, Normally Closed
Maximum Switching	48V at 1A (Resistive Load)
Additional Information	Outputs one and two offer a 12+ VDC supply fused at one Amp
Monitoring and Configuration	
The following monitoring and configuration methods are provided	Web management interface via HTTP or HTTPS (Secure); configurable SNMP and email alarm messages
Compliance	UL 60950-1 2nd edition, CAN/CSA-C22.2 No. 60950-1-07 Incl. Amd 1, CAN/CSA-CISPR 22-10, FCC Part 15B.Emissions

SmartZone™ Gateway EPA064

Gateway EPA064 test data (continued)






LCD Status Monitor	
The optional backlit LCD status monitor can display the following	Summary page displaying configured PDUs and inputs 1 and 2, all 6 digital inputs and all 4 PDUs; alternative display via selector switches
The following system information is also available	Firmware version, IP address, sub-net mask, gateway, MAC address
Additional Information	Backlit, powered from unit (no additional power source required)
Front Panel Indicators	
Green LED Network	Ethernet connection present (flashing indicates traffic present)
Yellow LED Network Speed	Off indicates 10Mbps network; On indicates 100Mbps network link
Green LED CPU Status	Flash indicates correct operation of the EPA064 Gateway unit
Red LED Alarm Status	One or more sensor input has exceeded a pre-set threshold
Blue LED	Internal low voltage power supply is within range
Yellow LED AC Feed A	Presence of AC Power on input Feed A
Rear Panel Indicators	
Green LED CPU Status	Flashing indicates PDU Expansion Units CPU alive
Blue LED Power On	Internal low voltage power supply is within range
Red LED Alarm Status	One or more sensor input has exceeded a pre-set threshold

part numbers

Gateway EPA064 Devices	
ZAH13-01	SmartZone™ Gateway EPA064 – UK-IEC power cable
ZAH13-01-99	SmartZone™ Gateway EPA064 – no power cable
ZAH13-01-NA	SmartZone™ Gateway EPA064 – IEC - NEMA 5-15 power cable
ZAH13-01-UNI	SmartZone™ Gateway EPA064 – IEC-IEC power cable
Sensors	
ZAPDUMOD-03	LCD Display Module with Selector Switches
ZAPDUMODKIT	External LCD Display Kit with Case Enclosure
FLABEA-01	Flashing Beacon with No Sounder
FLABEA-02	Flashing Beacon with Sounder
ZEAIR-02	Air Flow Sensor
ZECRDRKIT-01	HID Access Control Card Reader
ZEDIC05-01	Digital Input Sensor
ZEDL05-01	Door Contact Sensor (micro switch type)
ZEDL05-02	Door Contact Sensor (magnetic type)
ZEKPKIT-01	Keypad Kit
ZEPIR-04	PIR Sensor
ZESMA05-01	Smoke Detector
ZESS04-01	Shock Sensor
ZETHL-10	Humidity Sensor
ZETHL-11	Temperature/Humidity Sensor
ZETHL-12	Temperature Sensor
ZETHL-13	External Temperature Sensor
ZEWD3-05	Water Sensor (contact type)
ZEWS-03-03	Water Sensor (rope type)

SmartZone™ Gateway EPA064

Gateway EPA064 dimensions

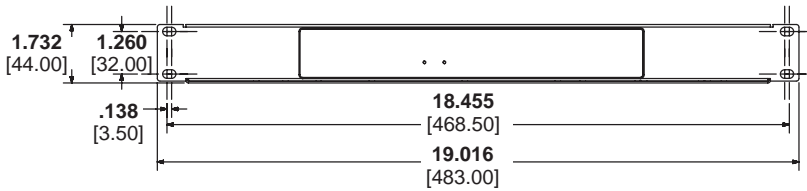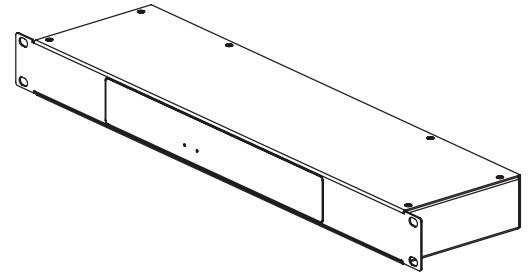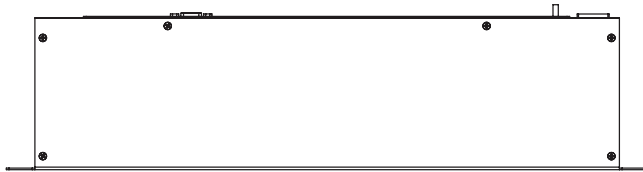

Dimensions are in inches. [Dimensions in brackets are metric].

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300



©2014 Panduit Corp.
ALL RIGHTS RESERVED.
PVSP108--WW-ENG
7/2014