

# EDGE8™ MTP® Trunk Cable

Bend-improved single-mode (OS2), 8F MTP (pinned) Connector to 8F MTP (pinned) Connector, 16F, with 840 mm legs, tool-less pulling grip one side, 30 m

CORNING

The EDGE8™ trunks utilise 8-fibre push/pull optical connectors that are pinned on both ends of the cable. The trunks are shipped with strain-relief clips that allow for tool-less installation in EDGE8 housings. The grip can be pulled using up to 400N of pulling tension while providing complete protection for the connectors. All trunks greater than 23 mt are packaged on a plastic corrugated reel for easy installation.

## Features and Benefits

### 8-fibre array connectors

Base 8 configuration allows for seamless migration to data rates of 40G and above

### Pinned MTP's on both ends

Allows for a single pinless jumper deployment in parallel optic electronics deployments

### Small outer diameter


Improves the cable tray fill ratio and allows for improved airflow

### Bend-improved fibre

Allows tighter cable bends for slack storage and routing, less risk of downtime due to pinched or bent cables

### Factory-terminated solutions

Provide consistent quality, ensure system performance, and reduce installation time

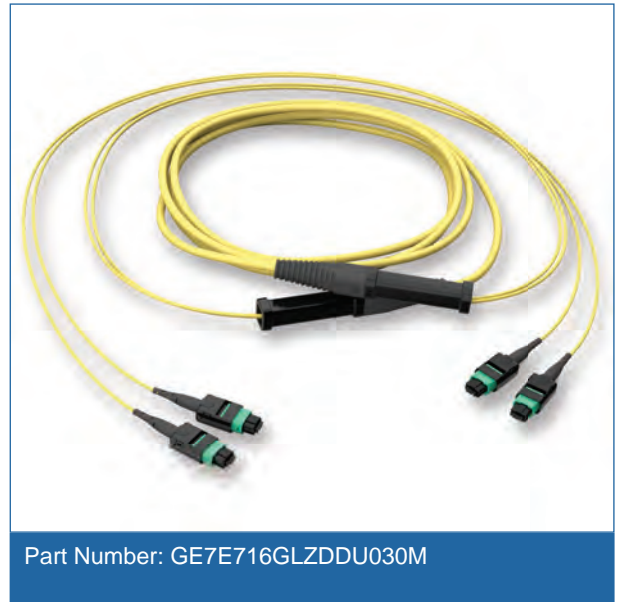

## Standards

<b>Intermateability</b>	TIA/EIA-604-5 / TIA/EIA-604-5
<b>Flame Resistance</b>	Flame retardant to IEC 60332-1-2 (single cable) Zero Halogen to IEC 60754-1 Non-Corrosive to IEC 60754-2

# EDGE8™ MTP® Trunk Cable

Bend-improved single-mode (OS2), 8F MTP (pinned) Connector to 8F MTP (pinned) Connector, 16F, with 840 mm legs, tool-less pulling grip one side, 30 m



## Specifications

### General Specifications

Application	Data Centre LAN/SAN
Cable type	Indoor; ANSI/ICEA S-83-596
Flame rating	LSZH™/FRNC
Cable assembly type	EDGE8™ Trunk
Fibre Category	Bend-improved SM (OS2)

### Temperature Range

Operation	-10 °C to 60 °C (14 °F to 140 °F)
-----------	-----------------------------------

### Design - Connector A

Connector Type	MTP® (pinned)
Ferrule Material	Composite
Boot colour	black

### Optical Specifications - Connector A

Insertion loss, max.	0.35 dB per mated pair
Reflectance	< -55 dB

### Design - Connector B

Connector Type	MTP® (pinned)
Ferrule Material	Composite
Boot colour	black

### Optical Specifications - Connector B

Insertion loss, max.	0.35 dB per mated pair
Reflectance	< -55 dB

# EDGE8™ MTP® Trunk Cable

Bend-improved single-mode (OS2), 8F MTP (pinned) Connector to 8F MTP (pinned) Connector, 16F, with 840 mm legs, tool-less pulling grip one side, 30 m



## Cable design

Fibre Count	16
Outer jacket colour	yellow
Polarity	Universal; TIA-568 Type-B

## Mechanical Characteristics Cable

Nominal Outer Diameter	7.7 mm ( $\pm 0.3$ mm)
Min. Bend Radius Installation	115.5 mm
Min. Bend Radius Operation	38.5 mm

## Furcation - Connector A

Legs Count	2
Leg length	840 mm (+76 mm/-0 mm)
Leg Colour	yellow
Leg diameter	2.0 mm
Plug Dimensions	108.6 x 14.7 x 14.7 mm
Furcation Type - A	EDGE™ Size 1; 14.7 mm x 14.7 mm x 108.6 mm

## Furcation - Connector B

Legs Count	2
Leg length	840 mm (+76 mm/-0 mm)
Leg Colour	yellow
Leg diameter	2.0 mm
Furcation Type - B	EDGE™ Size 1; 14.7 mm x 14.7 mm x 108.6 mm

## Pulling grip - Connector A

Pulling grip - Connector A	Yes
Pulling Grip Outer Diameter	41 mm
Min. duct size diameter	64 mm
Tensile strength	440 N

# EDGE8™ MTP® Trunk Cable

Bend-improved single-mode (OS2), 8F MTP (pinned) Connector to 8F MTP (pinned) Connector, 16F, with 840 mm legs, tool-less pulling grip one side, 30 m

CORNING

## Pulling grip - Connector B

Pulling grip - Connector B	No
----------------------------	----

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

## Fibre Specifications

### Optical Characteristics (cabled)

Fibre name	E9/125 SMF28e+
Fibre core diameter	9 µm
Fibre Category	OS2
Fibre code	U
Wavelengths	1310 nm / 1383 nm / 1550 nm
Linear Attenuation	0.38 dB/km / 0.38 dB/km / 0.25 dB/km
Serial 1 gigabit ethernet	5000 m / - / -
Serial 10 gigabit ethernet	10000 m / - / 40000 m
Cable cutoff wavelength	1260 nm

- Notes:
- 1) Meets 0.75 ns optical skew when used in all Corning Plug and Play™/EDGE™ systems solutions.
  - 2) Improved attenuation and bandwidth options available
  - 3) Bend-insensitive single-mode fibres available on request.
  - 4) Contact a Corning Customer Care Representative for additional information

## Ordering Information

Part Number	GE7E716GLZDDU030M
Product Description	EDGE8™ MTP® Trunk Cable, Bend-improved single-mode (OS2), 8F MTP Connector to 8F MTP Connector, 16F, with 840 mm legs, tool-less pulling grip one side, 30 m
EAN Code	4056418689050
Length	30 m
Cable Tolerance (measured furcation to furcation)	-0 m/+0.61 m

# EDGE8™ MTP® Trunk Cable

Bend-improved single-mode (OS2), 8F MTP (pinned) Connector to 8F MTP (pinned) Connector, 16F, with 840 mm legs, tool-less pulling grip one side, 30 m



## Shipping Information

Units Per Delivery	1/1
Packing type	Plastic reel
Packing contents	2x EDGE clips size 1 single stack, 2x EDGE clips size 1 double stack, 2x EDGE U-clips size 1, a printed test report and SRP



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY  
00 800 2676 4641 · FAX: +49 30 5303 2335 · [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2016 Corning Optical Communications. All rights reserved.