

ISP-MCOLS3-U110S magnetic and bolt contact

www.boschsecurity.com



BOSCH
Invented for life



- ▶ LSN magnetic and bolt contact for combined opening and closure monitoring of windows
- ▶ Tamper surveillance
- ▶ Head-on flush mounting
- ▶ For connecting to LSN intrusion control panels
- ▶ VdS class C/EN 50131-2-6 Grade 3

The LSN magnetic and bolt contact is used for combined opening and closure monitoring of windows that lock via a locking latch.

The contact is equipped with tamper surveillance. If an external magnet is in close proximity, the tamper switch is activated, which generates a message. Head-on flush mounting.

Certifications and approvals

Region	Certification	
Germany	VdS	G113046
Europe	CE	ISP-MCOLS3-U110S
	EN50131	ISP-MCOLS3-U110S

Installation/configuration notes

Monitoring variants in accordance with VdS


- Combined opening and closure monitoring, class C
- Closure monitoring, class C
- Opening monitoring, class C

Installation information

- The contact is installed head-on.

- Neither the contact nor the magnets may be installed in ferromagnetic materials.
- The contacts are generally installed in the door or window frames with the magnet in the window or in the door.
- The magnetic and bolt contact can only switch or report to the intrusion alarm system panel that the window is locked when the mechanical lock is 50% engaged.

Installation layout

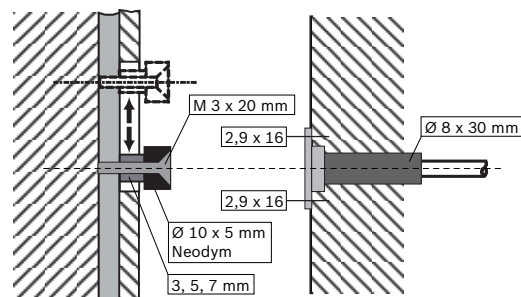


Connection of LSN contacts

- Each LSN contact is a physical LSN element (1 out of 127 possible per loop).

- The length of LSN contact connection cables must be included when planning the total line length of the LSN loop, as the LSN technology is integrated in these contacts.
- Passive elements for connecting the connection cables to the installation cable must be positioned as close as possible to the LSN contacts, as a 1-m connection cable with 2-m LSN cable length is included in the calculation of the LSN cable length (LSN is fed into the contacts and back out again).
- Connector boxes (optional) are classified as installation material.

Testing LSN contacts

- Reed switch and microswitch functions can be checked before installation using a high-Ohm multimeter or continuity checker (for diode paths).
- The resistance values are approximate values; a large change in resistance is significant.

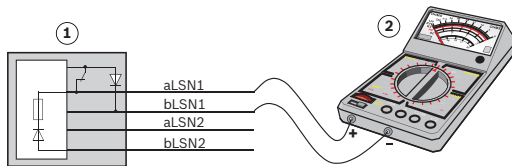

1 Contact us

2 High-ohm multimeter
 - Contact open: approx. 3 MOhm
 - Contact closed: approx. 1 MOhm

Only the intrusion contact can be checked in this way. The tamper switch can be checked in conjunction with the LSN control panel or with the LSN testing device (software version 3.x onward).

Parts included

Type	Qty.	Components
ISP-MCOLS3-U110S	1	Built-in magnetic contact with 4-m connection cable incl. installation flange, magnet, magnet cover, spacers, and mounting screw

Technical specifications

Switch dimension	Diameter: 8 mm x 30 mm
Magnet	Diameter: 10 mm x 3.6 mm x 5 mm (neodymium)
Reed contact type	2x normally open contacts
LSN operating voltage	15 V to 33 V
Current consumption	0.4 mA
Switch tolerance	$\geq 10^7$
Environmental class	VDS III – EN IIIa
Temperature range	-40 °C to +70 °C
Protection category	IP 67

Colors	White (RAL 9003)
Connection cable	LiY(St)Y 4 x 0.22 mm ²
Cable length	Standard length 4 m; maximum length 25 m
VdS class	
• Combined opening and closure monitoring	C
• Opening monitoring	C
• Closure monitoring	C

Ordering information

ISP-MCOLS3-U110S magnetic and bolt contact

For combined opening and closure monitoring of windows, tamper surveillance, head-on flush mounting
 Order number **ISP-MCOLS3-U110S**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com