


SCSH1132SLF Faceplates and Panels - FXU SPLITTER

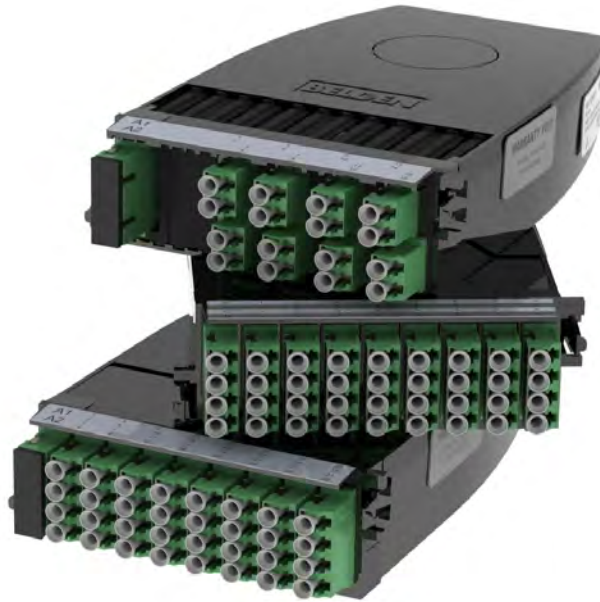

For more
information
please call
1-800-Belden1

General Description:

FX SPLITTER UHD CASSETTE, OS2, 1 SPLITTER, 1 X 32, SC/APC, LC/APC, FRONT

Usage (Overall)

Suitable Applications: FiberExpress Solutions, Backbone, Telecommunications Room, Main Distribution Room, Data Centers

Related Parts: FX UHD & FXU Patch Panels, FX Patch Cords

Physical Characteristics (Connectivity)

Capacity

Max. Capacity: 32 Fibers (Output)

Access

Front Connection: Static FXU HD

Termination Area: Front

Dimensions

Dimensions:

Height (in.)	Width (in.)	Length (in.)
1.500	4.500	9.080

Materials

Materials:

Description	Type	Material	Color
Adapter Sleeve		Zirconia-Ceramic	
Front Connector Body	SC-Duplex w/ Internal Shutters	Plastic - UL94V-0	Green
Front Connector Body	LC-Quad w/ Internal Shutters	Plastic - UL94V-0	Green
Cassette assy		Plastic - UL94V-0	Black

Weight

Weight: 0.500 lbs.

Packaging

Packaging: Individually packaged in a plastic shell, Shipped in cardboard box (14/box)

Mechanical Characteristics (Connectivity)

Storage Temperature Range: -10°C To +75°C

Operating Temperature Range: -10°C To +60°C

Applicable Specifications and Agency Compliance (Overall)

Applicable Standards & Environmental Programs

EU RoHS Compliance Date (mm/dd/yyyy): 01/01/2013

Mil Order #39 (China RoHS): EUP 50

Telecommunications Standards: Telcordia GR-1209-CORE (splitters only), Telcordia GR-1221-CORE (splitters only)

Suitability

Suitability - Indoor: Yes

Transmission Characteristics (Connectivity)

Transmission Specifications:

Splitter Config.	IL (dB)	Uniformity (dB)	PDL (dB)	Directivity (dB)	RL (dB)
1 x 8	10.7	1.1	0.3	55	55
1 x 16	14.1	1.4	0.3	55	55
2 x 8	11.2	1.7	0.4	55	55
2 x 16	14.7	2.1	0.4	55	55
1 x 32	17.0	2.0	0.4	55	55
2 x 32	18.2	2.5	0.5	55	55

Notes (Overall)

Product Family

SCSH1132SLF Faceplates and Panels - FXU SPLITTER

Put Ups and Colors:

Item #	Putup	Ship Weight	Color	Notes	Item Desc
SCSH1132SLF	1 EA	0.716 LB			FX SPL UHD CASS OS2 1S 1 X32

Revision Number: 0 Revision Date: 09-06-2016

© 2017 Belden, Inc
All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability. Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein. All sales of Belden products are subject to Belden's standard terms and conditions of sale.