

698 to 960 MHz/1710 to 2700 MHz 2-port MIMO Ceiling Mount Antenna



2-PORT MIMO MULTI-BAND CEILING MOUNTED OMNIDIRECTIONAL ANTENNA

The CMD69273 is an indoor broadband 2-port MIMO omnidirectional ceiling mount antenna. It is designed to provide pattern coverage that is optimized for indoor requirements at 698-960 MHz and 1710-2700 MHz for the CELLULAR, UMTS, and LTE/WiMAX frequency bands. The individual antenna elements are designed with linear H/V-polarization components oriented to provide a pattern that has been specifically shaped to provide optimal performance from a ceiling mount location.

FEATURES

- Low Profile aesthetically neutral housing
- Mounts directly and easily to ceiling tile
- Wide bandwidth 700/850/900/1800/1900/UMTS/2300/2400/2500
- Two radiating elements optimized for indoor MIMO Applications
- Low cross correlation between radiating elements
- Conformance to RoHS

MARKETS

- Cellular
- LTE/WiMAX
- 802.11 a/b/g/n
- Warehouse, Offices and Meeting Rooms
- Hotels, Museums, Libraries, Retail Malls
- Airport, Bus Terminals and Train Stations
- Other in-building areas

BENEFITS

- Complete cellular and 3G/4G data communications in a single antenna
- Radiating elements are oriented to provide maximal coverage
- To mitigate the multipath polarization propagation issue, each radiating element is designed to have dual-linear H/V polarization characteristics

	CMD69273
Frequency	698-960 MHz / 1710-2700 MHz
Peak Gain	3.35 dBi @ 700 MHz Band, 4.4 dBi @ 800 / 900 MHz Band 5.0 dBi @ 1800/1900/UMTS MHz Band, 5.6 dBi @ 2400/ 2500 MHz
Isolation	<-20 dB @ 700/800 MHz Band <-17 dB @ 900 MHz Band <-20 dB @ 1800/1900/2100 MHz Band <-20 dB @ 2400/2500 MHz Band
VSWR	2.0:1 maximum across all bands
Nominal Impedance	50 ohms
Polarization	Linear H/V for each radiator
Max Input Power	50 watts
RF Connector	Dual Type N Male (Plug)
Cable	Dual 305 mm, Plenum rated
Enclosure	UV Stable ASA
Antenna Weight	0.41 kg
Mounting	Ceiling Mount (flush mount with screws and anchors)
Operational Temperature	-30°C to +70°C
Storage Temperature	-40°C to +85°C
Material Substance Compliance	RoHS Compliant
Flammability Rating (Radome)	UL 94HB Materials
Dimensions	Diameter 218.7 mm x Height 43.5 mm
Standard for Safety: Information Technology Equipment	UL/CSA/EN/IEC/CB-Scheme 60950-1 Listed

CABLES AND CONNECTORS


PART NUMBER	CABLE LENGTH	CONNECTOR
CMD69273-30NF	DUAL 30 cm (12")	Dual Type N-Female
CMD69273-30NM	DUAL 30 cm (12")	Dual Type N-Male

Americas: +1.847.839.6925
IAS-AmericasEastSales@lairdtech.com
Europe: +44.(0).1628.858941
IAS-EUSales@lairdtech.com
Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com
www.lairdtech.com


698 to 960 MHz/1710 to 2700 MHz 2-port MIMO Ceiling Mount Antenna

PATTERNS


750 MHz Radiation Pattern

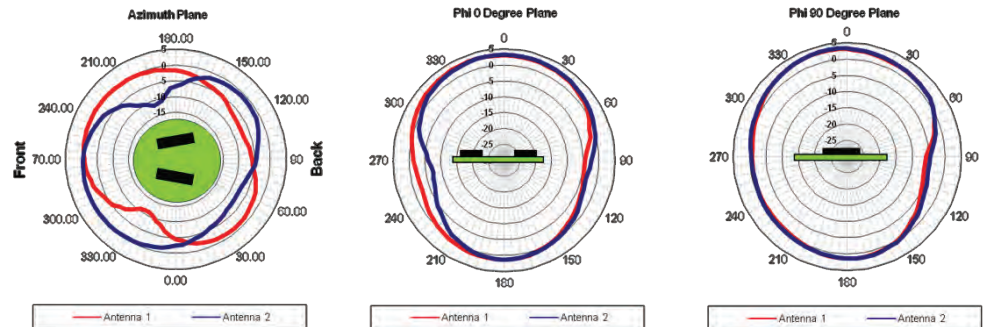


869 MHz Radiation Pattern

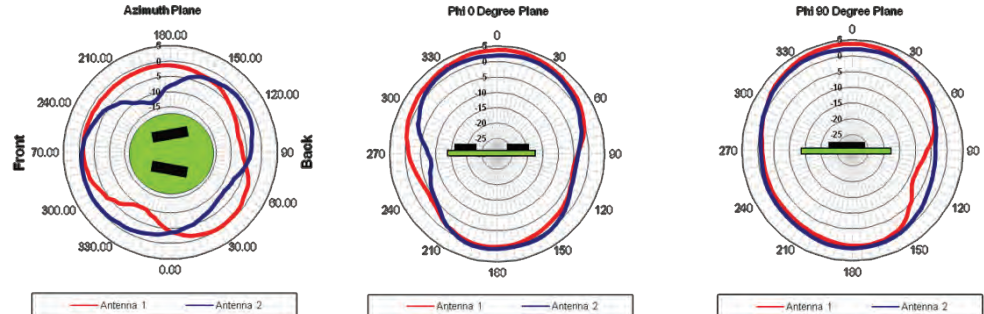

915 MHz Radiation Pattern

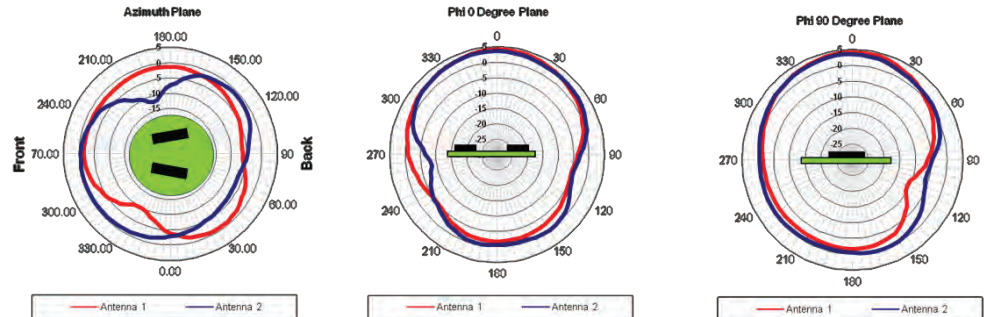


1780 MHz Radiation Pattern

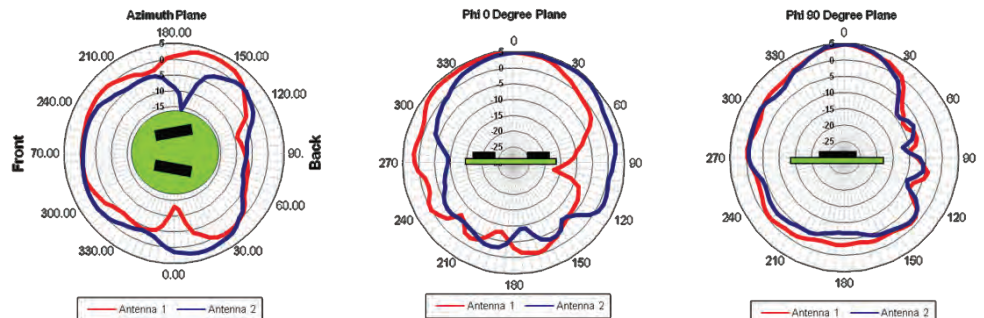


698 to 960 MHz/1710 to 2700 MHz 2-port MIMO Ceiling Mount Antenna

PATTERNS


1910 MHz Radiation Pattern

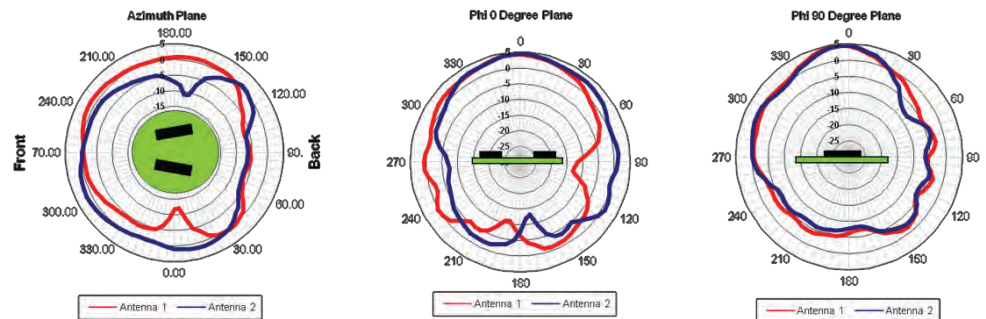

2110 MHz Radiation Pattern

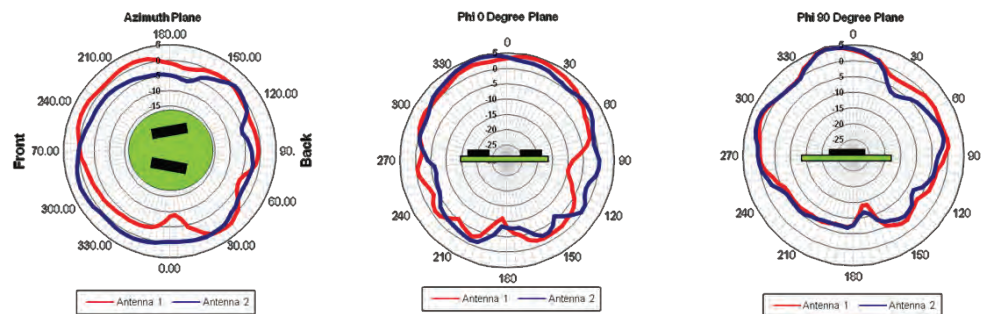

2600 MHz Radiation Pattern

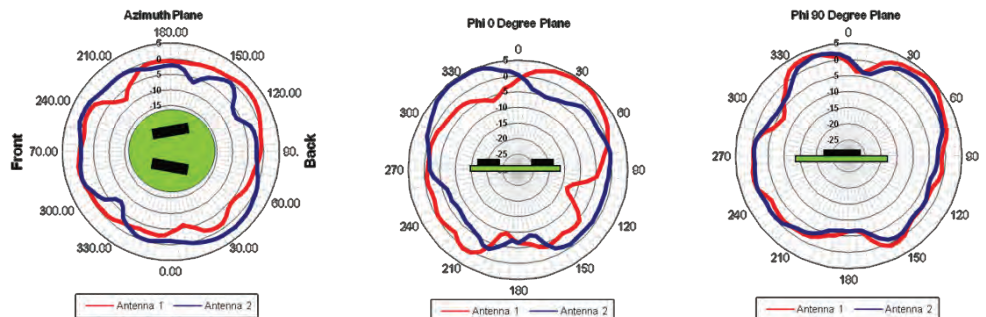

ANT-DS-CMD69273_0416

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird, Laird Technologies, Inc. or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2016 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.