

Data Communications Division 125 Eugene O'Neill Drive New London, CT 06320

1.877.BY.LEGRAND (295.3472) www.legrand.us

## **Product Environmental Profile**

### **Horizontal Cable Management Panels**



### **■ COMPANY OVERVIEW**

### • Designed to Be Better - Our Commitment to Sustainability

At Legrand®, our sustainability commitment translates into greater benefits and tangible value for our customers, business partners, employees, and the broader community.

### • Better Performance

We provide building solutions to meet many building performance goals from sustainability and energy efficiency to productivity and occupant well being. The right choice in network and electrical infrastructure can play a key role in many facets of building performance. Our products help ensure electrical safety. They offer choice and flexibility in space design. They are designed to reduce installation time and material waste on site. Because we know buildings consume a great deal of energy, we offer a range of products and solutions that reduce energy consumption from lighting to plug load to data centers.

#### Better Solutions

We offer a wide range of innovative solutions for the building, while constantly evolving our design and development processes to improve the environmental profile of our products. Through active monitoring and research, we serve as an expert resource for market trends and building and product performance standards to keep our customers at the top of their game.

#### • Better Operations

We focus on operational excellence because we believe optimizing the way we manage energy, water and waste is not only good for the environment, it's good for business. As part of the Department of Energy's Better Building, Better Plants Challenge (BBBP) Legrand has reduced its energy intensity by over 30% across 14 sites in the United States in just three years. Integrating sustainability into the way we run our operations makes us more competitive – and a better business partner.



For information on Legrand PEP's and other sustainability initiatives, scan the QR code to be brought to our Product Sustainability page.



### ■ LEGRAND'S ENVIRONMENTAL COMMITMENTS |

### • Incorporate environmental management into our industrial sites

Of all Legrand sites worldwide, over 85% are ISO 14001 certified (sites belonging to Legrand for more than five years).

### Offer our customers environmentally friendly solutions

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.

### • Involve the environment in product design

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



### ■ REFERENCE PRODUCT ■

Function	Provides support for cabling on a standard 19" rack system for a reference lifetime of 20 years.
Reference Product	
	Part Number: OR-MM6HMF2RU
	Mighty Mo® 6 Cable Management Panel, multiple fingers, 2RU, 3.5" x 19"

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.



Data Communications Division 125 Eugene O'Neill Drive New London, CT 06320

1.877.BY.LEGRAND (295.3472) www.legrand.us

## **Product Environmental Profile**

### **Horizontal Cable Management Panels**





### ■ PRODUCTS CONCERNED ■

The environmental data is representative of the following products:

**Mighty Mo 6 Horizontal Management Panels** OR-MM6HMFXRU

X = rack units

Cable Management Panels					
OR-808004759	OR-60400057				
OR-808004759	OR-60400131				
OR-808004759	OR-60400129				
OR-808004867	OR-60400426				
OD 00000/010					

OR-808004818 OR-808045590 OR-808045768 OR-808044915 OR-808044916 Interbay Organizers

OR-FCM-19-YXL OR-FCM-19-YL OR-FCM-19-YSR Y = rack units



### **CONSTITUENT MATERIALS**

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/EC and does not contain, as far as we know, any substance on the candidate list for authorization of the REACH regulation (EC) no. 1907/2006 with a concentration above 0.1% w/w.

Total waight of Deference Dreduct	
Total weight of Reference Product	
(with unit packaging)	4.1 lb (1882 g)
(with difft packaging)	4.1 tb (1002 g)

Plastics as % of weight		Metals as % of weight		Other as % of weight		
PC	23.4%	Steel	23.1%	Paper	<0.1%	
		Alluminum Alloy	9.1%			
		Copper Alloy	<0.1%			
				Packaging as % of weight		
				Paper and Cardboard	43.7%	
				PE (low density)	0.7%	
Total plastics	23.4%	Total metals	32.2%	Total other and packaging	44.4%	

Estimated recycled material content: 15% of weight.

The proportions of Steel, Aluminum, and plastics vary for the following products due to the use of a Steel or Aluminum panel, depending on the product, as opposed to a Steel panel with an Aluminum cover, as is represented with the materials for the Reference Product. Percentages for these materials are shown in the table below. The percent composition for materials not shown are similar to the values above for the Reference Product.

Part Number	% Steel	% Aluminum	% Plastics
OR-8080's ie OR-808004867	1	35	20
OR-6040's, OR-FCM's, and OR-8080's ie. OR-808044915	45	0	11



### ■ MANUFACTURING ■

The Reference Product comes from a site that has received ISO 14001 certification.



Data Communications Division 125 Eugene O'Neill Drive New London, CT 06320

1.877.BY.LEGRAND (295.3472) www.legrand.us

# **Product Environmental Profile**

### **Horizontal Cable Management Panels**





### ■ DISTRIBUTION ■

Products are distributed from logistics centers located to optimize transport efficiency. Information on the distance of distribution is not available so the PCR hypothesis for "Intercontinental transport", 2175 miles (3500 km) by heavy truck, was used. This represents transportation of the Reference Product from our warehouse to the local point of distribution in the North American market.



### ■ INSTALLATION ■

Only standard tools are needed for installation of the product. No electricity is required for installing the Reference Product.



### USE I

### Servicing and maintenance:

Under normal conditions of use, this type of product requires no servicing or maintenance.

#### Consumable

No consumables are necessary to use this type of product.



### END OF LIFE

### • Hazardous waste\* contained in the product: no hazardous waste

(\*) Hazardous waste as defined by European Commission decision 2000/532/EC.

#### Recycling rate

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the product is estimated as 98%. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

Separated into: [% mass of Reference Product without packaging]

plastic materials (excluding packaging):
metal materials (excluding packaging):
other materials (excluding packaging):
<1%</li>

Recycling rate of packaging (all types of materials): 99% (% mass of packaging)

The differences in materials for the products other than the Reference Product does not affect the recyclability rate of these products since the recyclability of Aluminum and Steel are similar. Thus, 98% represents the recyclability rate of these products as well.



### ■ ENVIRONMENTAL IMPACTS ■

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use, and end of life. It is representative of products marketed and used in North America.

The following modelling elements were taken into account:

Manufacturing	Packaging taken into account up to first level packaging. As required by the PEP ecopassport program, all transport for the manufacturing of the Reference Product, including materials and components, has been taken into account. The waste generated during manufacturing phase has been taken into account.
Distribution	Transport between the last distribution center and an average delivery to the sales area.
Installation	The end of life of the packaging (1.8 lb or 834 g) is taken into account at this phase. Transport of packaging to end of life treatment.
Use	<ul> <li>Under normal conditions of use, this type of product requires no servicing or maintenance.</li> <li>No consumables are necessary to use this type of product.</li> <li>Use scenario: no energy consumption during the 20 year working life. This modelling duration does not constitute a minimum durability requirement.</li> <li>Energy model: Electricity(US) - 2009</li> </ul>
End of life	The default end of life scenario modelled maximizes the environmental impact.
Software used	EIME V5 and its database "CODDE-2015-04" and the indicators defined in the PCR ed 3 in alignment with the EN15804 standard



Data Communications Division 125 Eugene O'Neill Drive New London, CT 06320

1.877.BY.LEGRAND (295.3472) www.legrand.us

# **Product Environmental Profile**

## **Horizontal Cable Management Panels**






### ■ ENVIRONMENTAL IMPACTS (continued) I

	Total for L	ifo cyclo	Raw mate and manufact		Distributi	on	Installatio	n.	Use		End of life	
	TOTAL TOT L	ine cycle	manulact	urnig	טואנו וטענו	OII	IIIStattatit	711	USE		Ella of the	
Global warming (GW)	1.01E+01	kg CO <sub>2</sub> eq.	9.66E+00	95%	3.28E-01	3%	5.25E-02	< 1%	0.00E+00	0%	9.19E-02	< 1%
Ozone depletion (OD)	5.98E-07	kg CFC-11 eq.	5.95E-07	100%	6.64E-10	< 1%	3.86E-10	< 1%	0.00E+00	0%	1.60E-09	< 1%
Acidification of soil and water (A)	2.47E-02	kg SO <sub>2</sub> eq.	2.26E-02	92%	1.47E-03	6%	2.56E-04	1%	0.00E+00	0%	3.67E-04	1%
Water eutrophication (WE)	4.94E-03	kg PO <sub>4</sub> 3- eq.	3.82E-03	77%	3.39E-04	7%	2.76E-04	6%	0.00E+00	0%	5.06E-04	10%
Photochemical ozone creation (POCP)	2.22E-03	kg C <sub>2</sub> H <sub>4</sub> eq.	2.07E-03	93%	1.05E-04	5%	1.81E-05	< 1%	0.00E+00	0%	2.81E-05	1%
Depletion of abiotic resources - elements (ADPe)	2.59E-06	kg Sb eq.	2.57E-06	99%	1.31E-08	< 1%	2.31E-09	< 1%	0.00E+00	0%	5.05E-09	< 1%
Total use of primary energy (PE)	1.92E+02	MJ	1.85E+02	96%	4.64E+00	2%	7.52E-01	< 1%	0.00E+00	0%	1.34E+00	< 1%
Net use of fresh water (FW)	6.95E-02	m³	6.94E-02	100%	2.93E-05	< 1%	1.72E-05	< 1%	0.00E+00	0%	5.66E-05	< 1%
Depletion of abiotic resources – fossil fuels (ADPf)	1.17E+02	МЛ	1.11E+02	94%	4.61E+00	4%	7.31E-01	< 1%	0.00E+00	0%	1.27E+00	1%
Water pollution (WP)	3.55E+03	m³	3.48E+03	98%	5.39E+01	2%	8.06E+00	< 1%	0.00E+00	0%	1.15E+01	< 1%
Air pollution (AP)	7.71E+02	m³	7.43E+02	96%	1.34E+01	2%	6.62E+00	< 1%	0.00E+00	0%	8.48E+00	1%

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website. The environmental impacts of the Reference Product are representative of the products covered by the PEP, which therefore constitute a homogeneous environmental family.

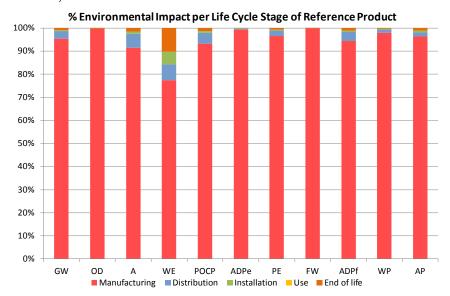

The environmental impact of the Reference Product occurs predominantly during the manufacturing phase.



Data Communications Division 125 Eugene O'Neill Drive New London, CT 06320

1.877.BY.LEGRAND (295.3472) www.legrand.us

## **Product Environmental Profile**

### **Horizontal Cable Management Panels**





### ■ ENVIRONMENTAL IMPACTS (continued) I

For products other than the Reference Product, the environmental impacts can be estimated by weighting the environmental impacts of the Reference Product by the values shown in the table below. Impacts from Distribution are proportional to the mass. Impacts from Installation are the same as the Reference Product.

For the Mighty Mo 6 Horizontal Managers, the impacts for manufacturing are proportional to the mass with respect to the values shown for OR-MM6HMF2RU.

For the OR-8080's that have panels made of Aluminum, the impacts for manufacturing are proportional to the mass with respect to the values shown for OR-808004867.

For the OR-8080's that have panels made of Steel and for the OR-6040's and Interbay Organizers, the impacts for manufacturing are proportional to the mass with respect to the values shown for OR-808044915.

Part Number	Manufacturing	Distribution	End of Life
OR-MM6HMF2RU	1.0	1.0	1.0
OR-808004867 (2RU)	A / 0D: 1.3 FW: 0.9 all else: 0.8	0.7	0.5
OR-808044915 (2RU)	OD / WP: 0.3 PE / FW: 0.9 all else: 0.7	0.9	0.8

Registration number: LGRP-00051-V01.01-EN	Drafting rules: "PCR-ed3-EN-2015 04"	
Verifier's accreditation number: VH02	Information and reference documents: www.pep-ecopassport.org	
Date of issue: 01-2016	Validity period: 5 years	
Independent verification of the declaration and data, in constitution and the second s	mpliance with ISO 14025:2010	
The PCR Review was conducted by a panel of experts chair	red by Philippe Osset (SOLINNEN).	
The elements of the present PEP cannot be compared wit	h elements from another program.	
Document in compliance with ISO 14025:2010: "Environmental declarations"	ental labels and declarations - Type III	
In compliance with ISO 14040:2006: "Environmental management – LCA – Principles and framework"		

In compliance with ISO 14044:2006: "Environmental management – LCA – Requirements and guidelines" In alignment with EN 15804:2012+A1:2013: "Sustainability of construction works - EPD's - Core rules for the

product category of construction products"