



A5DM-D

D-Class 7-16 DIN Male for 7/8 in AVA5-50 and AVA5-50FX cable

General Specifications


| | |
|----------------|--------------------------------------|
| Interface | 7-16 DIN Male |
| Body Style | Straight |
| Mounting Angle | Straight |
| Ordering Note | CommScope® standard product (Global) |

Electrical Specifications

| | |
|--------------------------------------|----------------------|
| Connector Impedance | 50 ohm |
| Operating Frequency Band | 0 – 3700 MHz |
| Cable Impedance | 50 ohm |
| 3rd Order IMD Dynamic Test Method | Two +43 dBm carriers |
| 3rd Order IMD, typical | -166 dBm @ 1800 MHz |
| 3rd Order IMD Test Method | Two +43 dBm carriers |
| RF Operating Voltage, maximum (vrms) | 1415.00 V |
| dc Test Voltage | 4000 V |
| Outer Contact Resistance, maximum | 1.50 mOhm |
| Inner Contact Resistance, maximum | 0.40 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Average Power | 3.0 kW @ 900 MHz |
| Peak Power, maximum | 40.00 kW |
| Insertion Loss, typical | 0.05 dB |
| Shielding Effectiveness | -130 dB |

A5DM-D

Outline Drawing

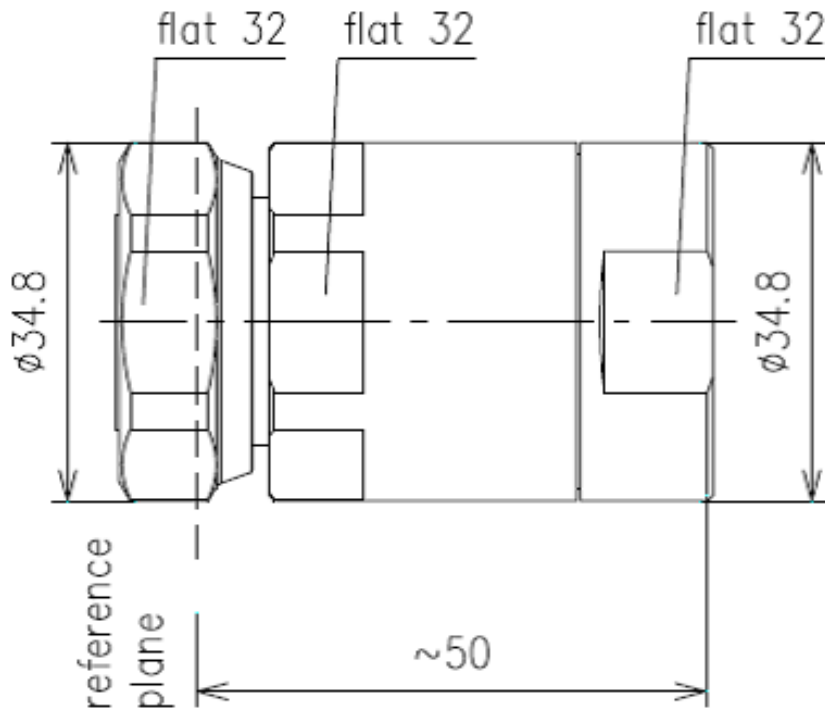

Mechanical Specifications

| | |
|-----------------------------------|------------------------|
| Inner Contact Attachment Method | Captivated |
| Outer Contact Plating | Trimetal |
| Inner Contact Plating | Silver |
| Attachment Durability | 25 cycles |
| Interface Durability | 50 cycles |
| Interface Durability Method | IEC 61169-4:9.5 |
| Connector Retention Tensile Force | 1334 N 300 lbf |
| Connector Retention Torque | 8.13 N-m 72.00 in lb |
| Insertion Force | 200.17 N 45.00 lbf |
| Insertion Force Method | IEC 61169-1:15.2.4 |
| Pressurizable | No |

Dimensions

| | |
|--------------|--------------------|
| Nominal Size | 7/8 in |
| Diameter | 34.80 mm 1.37 in |
| Length | 54.92 mm 2.16 in |
| Weight | 220.00 g 0.49 lb |

Environmental Specifications

| | |
|-----------------------|--------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Storage Temperature | -55 °C to +85 °C (-67 °F to +185 °F) |

A5DM-D

| | |
|---------------------------------|---|
| Immersion Depth | 1 m |
| Immersion Test Mating | Mated |
| Immersion Test Method | IEC 60529:2001, IP68 |
| Water Jetting Test Mating | Mated |
| Water Jetting Test Method | IEC 60529:2001, IP66 |
| Moisture Resistance Test Method | MIL-STD-202F, Method 106F |
| Mechanical Shock Test Method | IEC 60068-2-27 |
| Thermal Shock Test Method | MIL-STD-202, Method 107, Test Condition A-1, -55 °C to +85 °C |
| Vibration Test Method | IEC 60068-2-6 |
| Corrosion Test Method | IEC 60068-2-11 |

Standard Conditions

| | |
|------------------------------------|----------------|
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |

Return Loss/VSWR

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|------|------------------|
| 0–1000 MHz | 1.02 | 40.00 |
| 1000–2700 MHz | 1.04 | 34.00 |
| 2700–3800 MHz | 1.07 | 30.00 |

Regulatory Compliance/Certifications

| Agency | Classification |
|----------------------------|--|
| RoHS 2011/65/EU | Compliant by Exemption |
| China RoHS SJ/T 11364-2006 | Above Maximum Concentration Value (MCV) |
| ISO 9001:2008 | Designed, manufactured and/or distributed under this quality management system |



* Footnotes

| | |
|-------------------------|---|
| Immersion Depth | Immersion at specified depth for 24 hours |
| Insertion Loss, typical | 0.05v ⁻ freq (GHz) (not applicable for elliptical waveguide) |