4100 Accessories

4100LB *NEW*

The microswitches you've used for 30 years are a thing of the past. They are affected by moisture and fail sooner than you expect.

The Trine 4100LB makes use of a sealed magnetic reed switch that is moisture and environmentally resistant with a cycle count in excess of 2 million.

Stop replacing strikes due to low cost microswitches and start using a real Latchbolt Monitoring Solution.

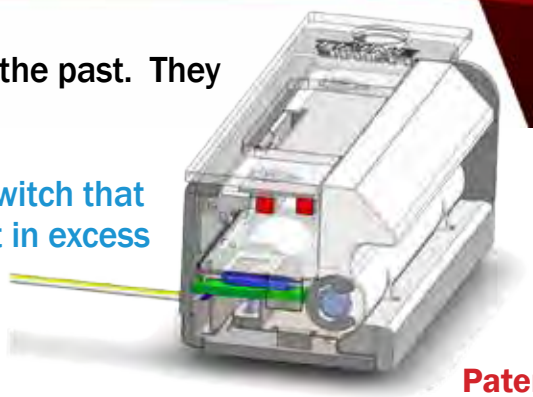

Patent Pending

4100LB CHARACTERISTICS:

CONTACT FORM:	C
CONTACT RATING:	10W
SWITCHING VOLTAGE:	30V MAX AC/DC
SWITCHING CURRENT:	0.5 A
CONTACT RESISTANCE STATIC:	150 MILLIOHM
BREAKDOWN VOLTAGE:	200 VDC
OPERATING TEMP:	-40° - 130° C
RATE:	2,000,000+ CYCLES

THE 4100LB COMES WITH 4 FACEPLATES

Just like the regular 4100 model, all four faceplate configurations can be used with the LB monitor for maximum flexibility.

4100RX-250

- 1/4" stainless steel ramp extensions.
- Perfect for Raco® frames or similar.
- Extension acts like a trim skirt to hide the cut line pocket.

Finishes:

4100RX-250-32D (Satin Stainless Steel – BHMA630)

US10B (Dark Bronze – BHMA613)

4100-AK: Accessories Kit

- Standard and Torx® screws
- Latch shims
- Plug-in style wire connectors
- Sealed crimp connectors

Piezo Buzzers:

- **BZ-12**: Audible buzzer for 12DC power

- - or - -

- **BZ-24**: Audible buzzer for 24DC power

DC VOLTAGE ONLY

Additional Faceplates:

Aluminum Solution

We offer 3 faceplate sizes to meet the demands of aluminum installations.

All faceplates can be used with the 4200.

With radiused corners.

CC9: 9" x 1 - 1/4" Faceplate.

CRD8: 7 - 15/16" x 1 - 7/16" Faceplate

CRD7: 6 - 7/8" x 1 - 1/4" Faceplate

CCRD: 4 - 7/8" x 1 - 1/4" Faceplate

Finish:
32D (Satin Stainless - BHMA630)

The following finishes are:
32 (Polished Stainless - BHMA629)
US3 (Bright Brass - BHMA605)

The following finishes are:
US4 (Satin Brass - BHMA606)
US10 (Satin Bronze - BHMA612)
US10B (Dark Bronze - BHMA613)