

eBridge100STR

IP and PoE/PoE+ over Coax Solution

Description


Altronix eBridge100STR EoC adapter kit transmits data at 100Mbps full duplex and power over Coax cable in a PoE/PoE+ compliant format. eBridge100RM is powered via a PoE midspan or endspan. The receiver passes PoE/PoE+ over coax cable to the eBridge100ST hardened transceiver which, in turn, passes this power to an enabled IP camera/device. These plug and play units facilitate cost-effective solutions for IP devices that need to be installed at distances greater than 100m. They provide a simple way to replace legacy analog products with new IP devices over existing coax.



Key Features

- IEEE 802.3af (15W) and IEEE 802.3at (30W).
- Throughput is rated to pass 100Mbps at distances up to 300m.
- Eliminates the costs and labor associated with installing new network cabling.
- Retrofit digital IP cameras in an analog CCTV installation.
- Auto detection and protection of legacy non-PoE cameras/devices.
- Works with Megapixel, HD720, HD1080 & VGA (SD) cameras.
- Extends Network link distance in an industrial environment.
- Upgrades deployed CCTV Coax to a digital network for Retail, Casinos, Airports, Schools, Hospitals, etc.
- UL Listed in the U.S. and Canada.
- CE Approved.
- Lifetime Warranty / Made in the U.S.A.

Typical Operation Diagram

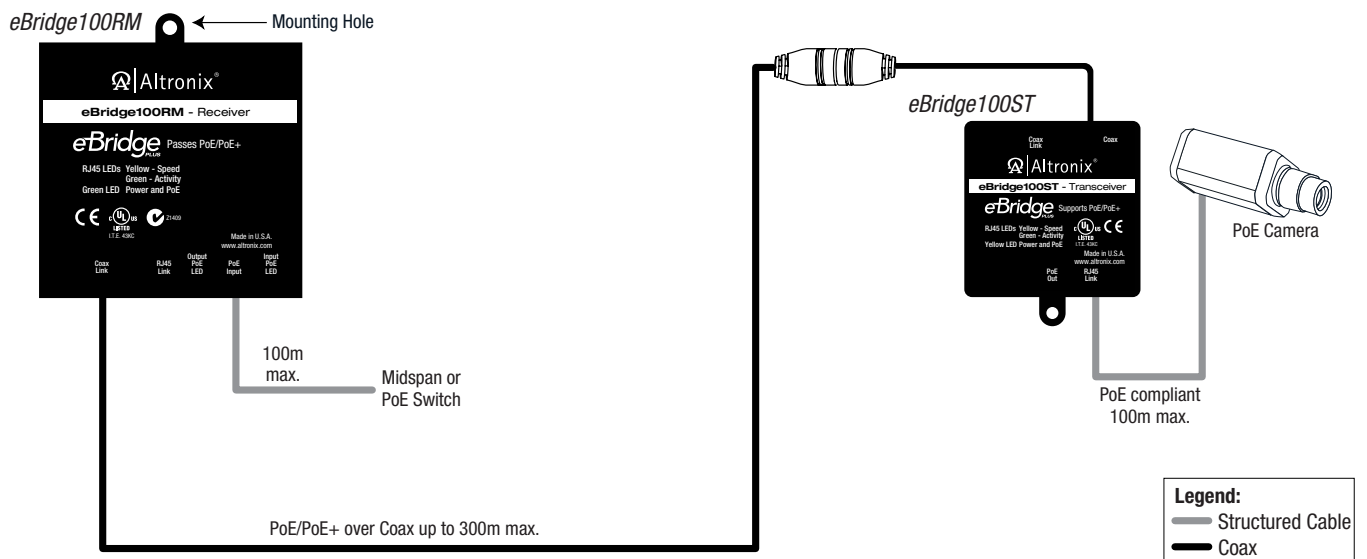

eBridge100STR IP and PoE/PoE+ over Coax Solution

Specifications

Input

- eBridge100RM: Powered by midspan or endspan.
eBridge100ST: Operating power provided by eBridge100RM.
Power consumption: 1.5W.

Coax

- Throughput rated at 100Mbps at distances up to 300m.
Speed: 10/100BaseT, half/full duplex, auto negotiation.
Connectivity: BNC, RG-59/U or similar.

Indicators (LED)

- eBridge100RM:
Green LED: PoE ON.
Yellow LED: Power ON.
eBridge100RM and eBridge100ST:
Yellow and Green LED (RJ45): IP Link status, 10/100Base-T/active.
eBridge100ST:
Blue LED: Coax link connection.
Green LED: PoE ON.

Agency Listings

- UL/cUL UL 60950-1
 (Information Technology Equipment).
CE European Conformity.

Physical and Environmental

Dimensions (W x L x H)

- eBridge100RM:
3.5" x 4.375" x 1" (88.9mm x 111.1mm x 25.4mm).
eBridge100ST:
2.27" x 2.645" x 1.12" (57.7mm x 67.2mm x 28.4mm).

Weight (approx.)

- Product Weight 0.4 lbs. (0.18 kg).
Shipping Weight 1 lbs. (0.45 kg).

Temperature

- Operating
eBridge100RM: -20°C to 49°C (-4°F to 120.2°F).
eBridge100ST:
For 15W: -40°C to 75°C (-40°F to 167°F).
For 30W: -40°C to 60°C (-40°F to 140°F).

Storage

- Relative Humidity 85% +/-5%.
Operating Altitude: -304.8 to 2,000m.