
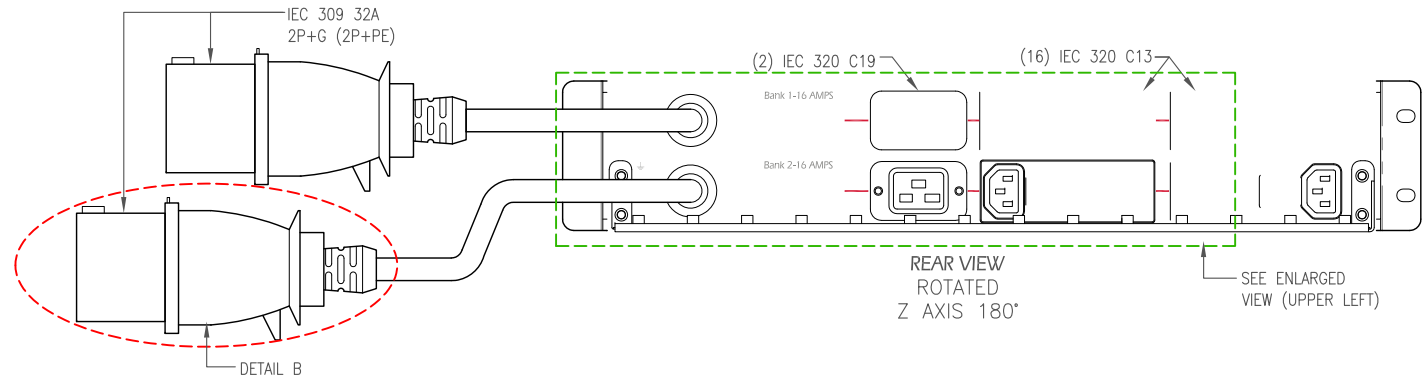
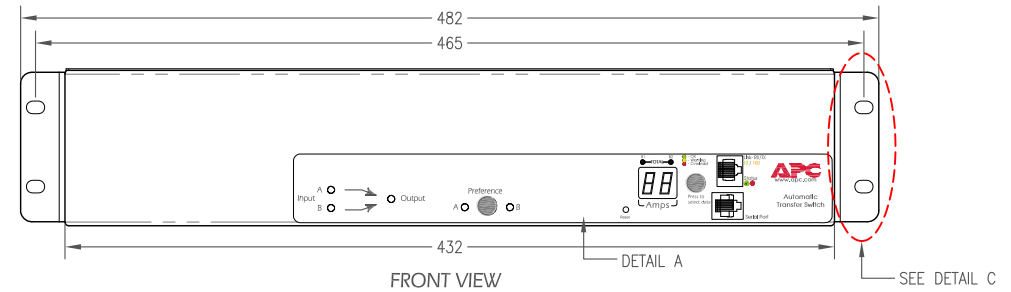
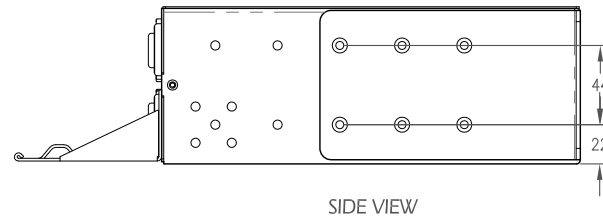
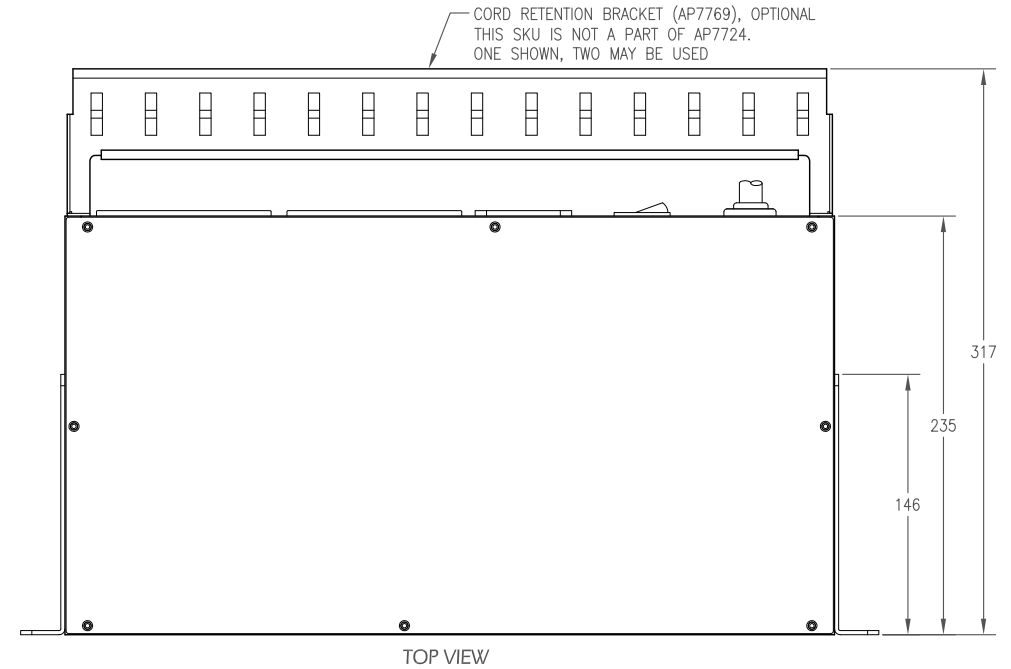


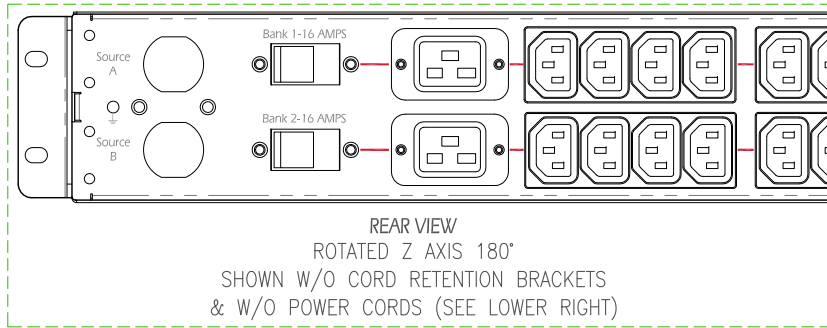

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.
4. NET WEIGHT IS 6.5kg.
5. LENGTH OF CORD IS 2438mm.


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider Electric



TITLE: RACK ATS, 2U
INPUT: 230VAC, 32A MAX, IEC309 2P+E
OUTPUT: (16) IEC320 C13, (2) IEC320 C19
GENERAL MECHANICAL LAYOUT
PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 2

DWG NO: AP7724
DRAWN: M CRAVEN 04-MAY-09
ENGINEER: T HORSTMANN/Y JIANG 04-MAY-09
APPROVED: C LARSEN 04-MAY-09


REV: 0
FIRST ANGLE
PROJ

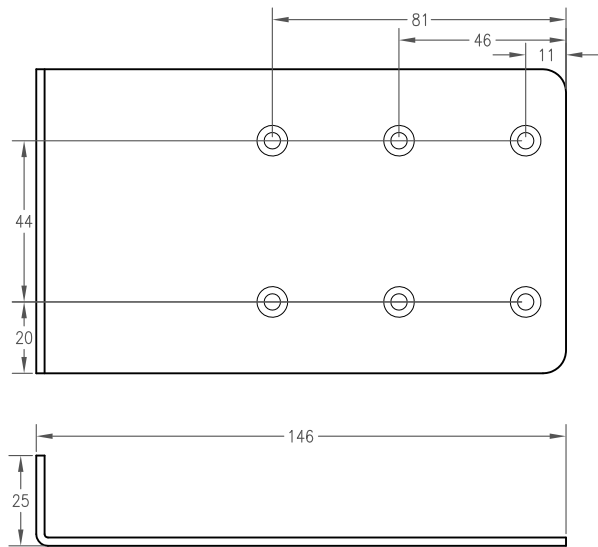

DETAIL C
MOUNTING BRACKET
MAT'L: 2 THK

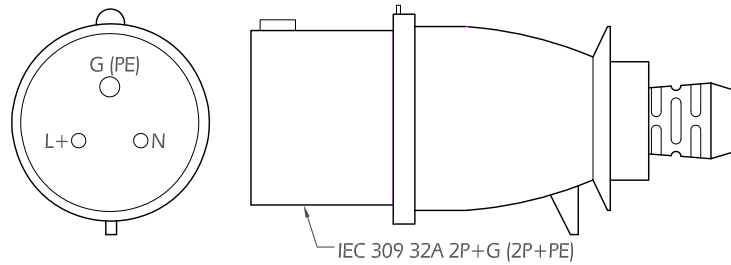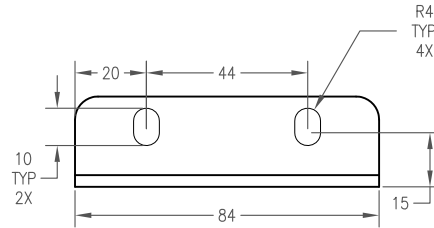

DETAIL B

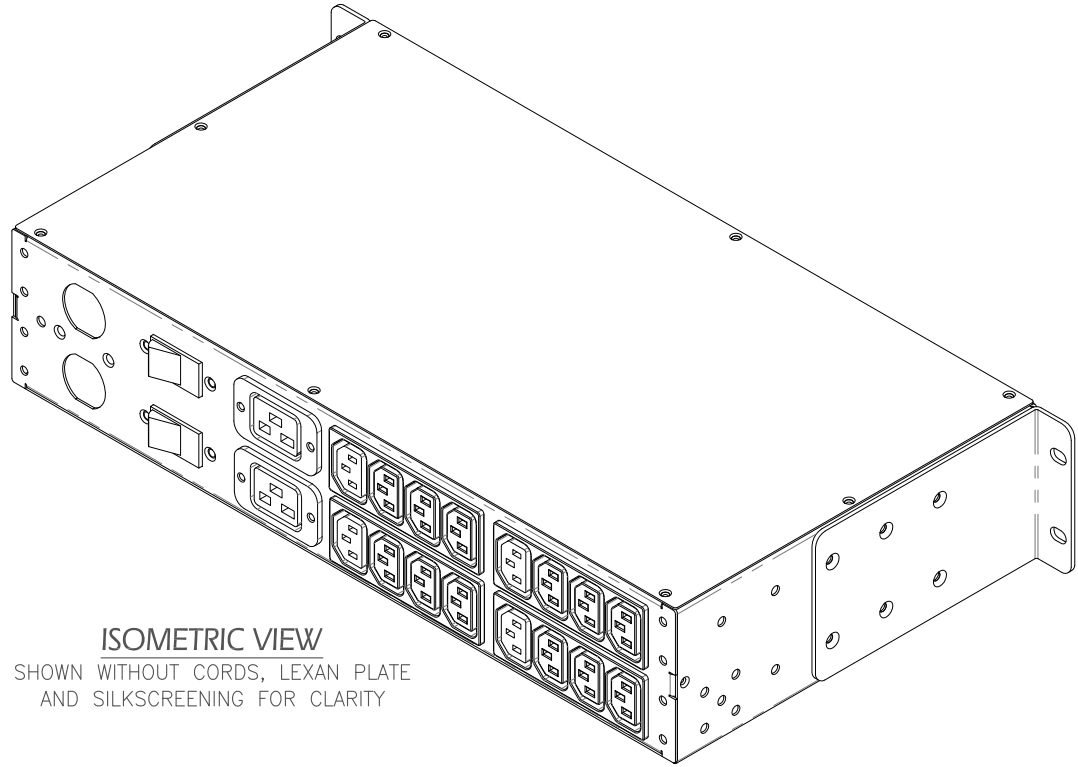

ISOMETRIC VIEW
SHOWN WITHOUT CORDS, LEXAN PLATE
AND SILKSCREENING FOR CLARITY



DETAIL A

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider Electric

TITLE: RACK ATs, 2U
INPUT: 230VAC, 32A MAX, IEC309 2P+E
OUTPUT: (16) IEC320 C13, (2) IEC320 C19
ISOMETRIC AND DETAIL VIEWS
PROJECT: SUBMITTAL DRAWINGS SHEET 2 OF 2

DWG NO: **AP7724**
REV: **0**
DRAWN: M CRAVEN 04-MAY-09
ENGINEER: T HORSTMANN/Y JIANG 04-MAY-09
APPROVED: C LARSEN 04-MAY-09
FIRST ANGLE PROJ