

## 3327A/3527A Surface mounted vertical rod device




**3327A and 3527A** for all types of single and double doors, UL listed for panic exit hardware. Devices are ANSI A156.3 – 2008 Grade 1. The 3527A has a smooth mechanism case and the 3327A has grooved case. The surface vertical rod device is non-handed except when the SS (signal switch) option is used. See opposite page for available outside trim and device functions.

3327A/3527A fits door stiles as narrow as 1<sup>3</sup>/<sub>4</sub>" (44mm). Newly designed device has a one piece center case cover.

**Finishes** – US3, US4, US10, US15 (35A Only) US26, US26D, US26D-AM, US28, 313 and 315.

### Specifications

Device lengths	<b>2'</b> 2' (610 mm) Door size <b>3'</b> 2'4" to 3' (660mm to 914 mm) door size <b>4'</b> 2'8" to 4' (813 mm to 1219 mm) door size
Device centerline from finished floor	39 <sup>13</sup> / <sub>16</sub> " (1006mm)
Center case dimensions	8 <sup>13</sup> / <sub>16</sub> " x 2 <sup>13</sup> / <sub>32</sub> " x 1 <sup>9</sup> / <sub>16</sub> " (208mm x 62mm x 40mm)
Mechanism case dimensions	2 <sup>1</sup> / <sub>4</sub> " x 2 <sup>1</sup> / <sub>4</sub> " (57mm x 57mm)
Projection	Pushbar neutral – 3 <sup>13</sup> / <sub>16</sub> " (97 mm) Pushbar depressed – 3 <sup>1</sup> / <sub>16</sub> " (78 mm)
Latch bolt	Deadlocking anti-friction top & bottom bolt <sup>5</sup> / <sub>8</sub> " (16mm) throw
Door undercut	<sup>1</sup> / <sub>4</sub> " (7mm)
Top & bottom latch	4 <sup>1</sup> / <sub>2</sub> " x 2 <sup>1</sup> / <sub>8</sub> " x 1 <sup>1</sup> / <sub>2</sub> " (114mm x 54mm x 38mm)
Vertical rods	1/2" square tubing, standard rods accommodate 7' (2134mm) door Top rod length is 34 <sup>15</sup> / <sub>16</sub> " (887mm) Bottom rod length is 31 <sup>1</sup> / <sub>4</sub> " (794mm) Extension rods available 1' (205mm) or 3' (914mm) for doors over 7' One piece top rod available for 8' (2438mm) -10' (3048mm) door
Fasteners & sex bolts (SNB)	Includes 1 <sup>3</sup> / <sub>4</sub> " (44mm) – 2 <sup>1</sup> / <sub>4</sub> " (57mm) wood & metal doors #425 SNB furnished standard for end case #325 SNB furnished standard for EO (exit only device) #325 SNB furnished for top and bottom latches
Electric options	<b>ALK</b> Alarm kit <b>CX</b> Chexit delayed exit <b>EL</b> Electric latch retraction <b>HD-EL</b> Electric latch retraction with hex dogging <b>QEL</b> Quiet electric latch retraction <b>RX</b> Request to exit, WP-RX waterproof option <b>LX</b> Latchbolt monitoring <b>LX-RX</b> Request to exit / latchbolt monitoring <b>RX-LC, LX-LC, LX-RX-LC</b> Low current option for RX, LX, LX-RX <b>SS</b> Signal switch <b>CON</b> Allegion Connect
Miscellaneous options	<b>GBK</b> Glass bead kit <b>PL</b> Pullman latch <b>PN</b> Pneumatic <b>LBR</b> Less bottom rod <b>SG</b> Safety glow <b>SEC</b> Security screws <b>SNB</b> Sex bolts
Dogging feature	<b>Hex dogging standard</b> <b>CD</b> Cylinder dogging <b>LD</b> Less dogging
Strikes	Top – <b>266</b> – Dull black, bottom – <b>248L4 &amp; 304L</b> – Unfinished <b>Optional strikes</b>

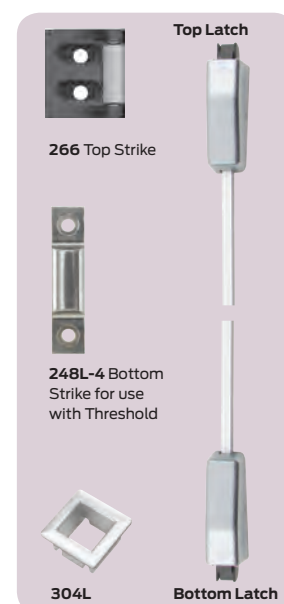

<b>QEL</b> <b>Quiet electric latch retraction</b> <ul style="list-style-type: none"> <li>Bolt retraction via switch</li> <li>Converts exit door to push-pull operation</li> </ul>	<b>RX</b> <b>Pushpad monitor switch</b> <ul style="list-style-type: none"> <li>Signals use of an opening</li> <li>SPDT switch to monitor pushpad operation</li> </ul>
<b>E (E360L)</b> <b>Electric lever trim</b> <ul style="list-style-type: none"> <li>Electrified remote locking/unlocking</li> <li>Fail safe &amp; fail secure options available</li> <li>No key override</li> </ul>	<b>ALK</b> <b>Alarm exit kit</b> <ul style="list-style-type: none"> <li>Unauthorized opening triggers 85-decibel horn</li> <li>Set in armed or disarmed mode by key</li> </ul>
<b>DI</b> <b>Dogging Indicator</b> <ul style="list-style-type: none"> <li>Monitor dogging status without a control panel</li> <li>Red indicator light shows visibility to dogging from over 75 feet</li> </ul>	<b>CON</b> <b>Allegion Connectors</b> <ul style="list-style-type: none"> <li>Common connectors to connect various door hardware all the way to the power supply</li> </ul>
<b>EL</b> <b>Electric latch retraction</b> <ul style="list-style-type: none"> <li>Enables remote unlatching</li> <li>Alternative to manual dogging</li> </ul>	<b>PN</b> <b>Pneumatic latch retraction</b> <ul style="list-style-type: none"> <li>For areas where electrical devices banned</li> <li>Special linkage for mechanical or pneumatic dogging</li> </ul>
<b>CD</b> <b>Cylinder dogging</b> <ul style="list-style-type: none"> <li>Replaces hex key dogging</li> <li>Requires standard 1<sup>1</sup>/<sub>4</sub>" mortise cylinder</li> </ul>	