



iCLASS Credentials

iCLASS Card - 200 / 210

iCLASS cards can be ordered either with both SIO and iCLASS programming or iCLASS programming only.

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

Base Model: 200 Standard PVC 210 Composite 40% Polyester / PVC*

iCLASS Memory Size and Allocation (Select one option)

- 0 - 2k Bits (256 Bytes) with 2 Application Areas
- 3 - 32k Bits (4K Bytes) Application areas 16k/2+16k/1
- 4 - 32k Bits (4K Bytes) Application areas 16k/16+16k/1

iCLASS Programming (Select one option)

- HP - Programmed with Security Identity Object (SIO) and standard iCLASS Access Control Application (Recommended)¹
- P - Programmed with standard iCLASS Access Control Application
- C - Unprogrammed, for use with iCLASS SE Encoder

Front Packaging (Select one option)

- G - Plain White with Gloss Finish
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number²

Back Packaging (Select one option)

- G - Plain White with Gloss Finish³
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number²
- 1 - Plain White with Gloss Finish with Magnetic Stripe³
- 3 - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number²

Card Numbering⁴ (Select one option)

- M - Sequential Matching Encoded/Printed (Inkjetted)⁵
- N - No Printed Card Numbering
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)⁵
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)⁵
- A - Sequential Matching Encoded/Printed (Laser Engraved)⁵
- B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)⁵
- C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)⁵

Slot Punch⁶ (Select one option)

- N - No slot punch, This card can be slotted vertically, Printed Vertical Slot Indicators
- B - No Slot Punch, This card can be slotted horizontally, Printer VHorizontal Slot Indicators⁷
- V - Vertical Slot Punch
- H - Horizontal Slot Punch⁷

Option - Custom Artwork²

- _____ (Specify Artwork Number - Refer to the Custom Artwork Forms for new artwork)

Enter your final card options from check boxes above. Example: 2000HPGGNN

Final Part Number								-	(Options #)
-------------------	--	--	--	--	--	--	--	---	-------------

iCLASS Card Programming Information

Format Number ____ (example: H10301) Bit Numbers ____ (example: 26 bit) Facility Code ____

Encoded Card # Start ____ Stop ____ Printed Card # Start ____ Stop ____

HID Elite ICE Number (if applicable) - ____ (Custom Format) Site Code ____ City Code ____ OEM Code ____

PIN (2-12 digits): Sequential: Start # _____ Random: Length _____

Special Instructions: _____

¹ Secure Identity Object (SIO) Programming is not mandatory but highly recommended. If SIO programming is not selected the letter H should be left out from Final Part Number, for example: 2000PGGNN

² For new artwork files, contact Customer Service for custom artwork number, lead-times, and cost.

³ Cards ordered with plain white front and back packaging, or custom artwork, will still have a small HID logo and reference number printed in the lower left-hand corner and a slot punch target printed on the back of the card.

⁴ The Printed card number is placed in the bottom right-hand corner on the back of the card.


⁵ For Laser Engraved Printed numbers, consult factory for lead times and cost.

⁶ Cards are provided with an optional slot punch at no additional charge. Some video imaging printers cannot accommodate pre-slot punched cards.

⁷ The ability to add a horizontal slot punch requires a different iCLASS antenna design. Users can expect a read range reduction of approximately 20% if they order option H for the Slot Punch.

⁸ Please note that cards shipped within North America are always laser-engraved. Inkjetted option is not available for these cards.

* The composite construction is recommended for all cards with over-laminate applied. Consult with the printer manufacturer prior to ordering.

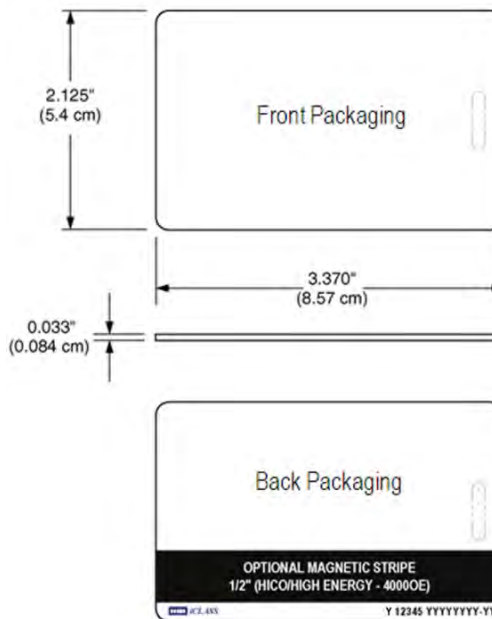

Y = iCLASS Programming
12345 = Card ID Number
YYYYYYY-YY = Sales Order Number