


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT<br>PART NO. | PART<br>DESCRIPTION      | MATERIAL                                 | STYLE              | "B"               | "C"               | "E"<br>±.050      | COLOR<br>(PRINT<br>ON AREA) | LABELS PER<br>ROLL |
|---------------------|--------------------------|------------------------------------------|--------------------|-------------------|-------------------|-------------------|-----------------------------|--------------------|
| S025X075VAC         | 18-14 AWG<br>WIRE        | <div>GMV17</div> <div><div>4</div></div> | 2                  | 0.75<br>[ 19.05 ] | 0.25<br>[ 6.35 ]  | 0.25<br>[ 6.35 ]  | WHITE                       | 650                |
| S050X075VAC         | 18-14 AWG<br>WIRE        |                                          |                    |                   | 0.50<br>[ 12.70 ] |                   |                             | 450                |
| S050X125VAC         | 12-10 AWG<br>WIRES       |                                          | 0.50<br>[ 12.70 ]  | 1.25<br>[ 31.75 ] | 0.38<br>[ 9.65 ]  | 225               |                             |                    |
| S050X150VAC         | CAT. 5e/<br>CAT. 6 CABLE |                                          |                    | 1.50<br>[ 38.10 ] | 0.50<br>[ 12.70 ] | 200               |                             |                    |
| S075X075VAC         | 18-14 AWG<br>WIRE        |                                          | 0.75<br>[ 19.05 ]  | 0.75<br>[ 19.05 ] | 0.25<br>[ 6.35 ]  | 350               |                             |                    |
| S075X100VAC         | 12-10 AWG<br>WIRES       |                                          |                    | 1.00<br>[ 25.40 ] | 0.38<br>[ 9.65 ]  | 275               |                             |                    |
| S075X125VAC         | 12-10 AWG<br>WIRES       |                                          |                    | 1.25<br>[ 31.75 ] | 0.50<br>[ 12.70 ] | 225               |                             |                    |
| S075X150VAC         | CAT. 5e/<br>CAT. 6 CABLE |                                          |                    | 1.50<br>[ 38.10 ] | 0.50<br>[ 12.70 ] | 200               |                             |                    |
| S100X075VAC         | 18-14 AWG<br>WIRE        |                                          | 1                  | 0.75<br>[ 19.05 ] | 0.25<br>[ 6.35 ]  | 350               |                             |                    |
| S100X125VAC         | 12-10 AWG<br>WIRES       |                                          |                    | 1.25<br>[ 31.75 ] | 0.38<br>[ 9.65 ]  | 225               |                             |                    |
| S100X150VAC         | CAT. 5e/<br>CAT. 6 CABLE |                                          |                    | 1.50<br>[ 38.10 ] | 0.50<br>[ 12.70 ] | 200               |                             |                    |
| S100X160VAC         | NWSLC-2Y<br>AND NWSLC-3Y |                                          |                    | 1.60<br>[ 40.64 ] | 0.80<br>[ 20.32 ] | 175               |                             |                    |
| S100X220VAC         | NWSLC-7Y                 |                                          |                    | 2.20<br>[ 55.88 ] | 1.10<br>[ 27.94 ] | 125               |                             |                    |
| S100X150VBC         | CAT. 5e/<br>CAT. 6 CABLE |                                          |                    | 1.00<br>[ 25.40 ] | 1.50<br>[ 38.10 ] | 0.50<br>[ 12.70 ] | BLUE                        | 200                |
| S100X150VDC         | CAT. 5e/<br>CAT. 6 CABLE |                                          |                    |                   |                   |                   | GREEN                       |                    |
| S100X150VHC         | CAT. 5e/<br>CAT. 6 CABLE |                                          |                    |                   |                   |                   | RED                         |                    |
| S100X150VIC         | CAT. 5e/<br>CAT. 6 CABLE |                                          |                    |                   |                   |                   | YELLOW                      |                    |
| S100X225VAC         | 8-4 AWG CABLE            |                                          | 2.25<br>[ 57.15 ]  | 0.75<br>[ 19.05 ] | WHITE             | 125               |                             |                    |
| S100X225VBC         | 8-4 AWG WIRES            |                                          |                    |                   | BLUE              |                   |                             |                    |
| S100X225VDC         | 8-4 AWG WIRES            |                                          |                    |                   | GREEN             |                   |                             |                    |
| S100X225VHC         | 8-4 AWG WIRES            |                                          |                    |                   | RED               |                   |                             |                    |
| S100X225VIC         | 8-4 AWG WIRES            |                                          |                    |                   | YELLOW            |                   |                             |                    |
| S100X400VAC         | 1-2 AWG WIRES            |                                          | 4.00<br>[ 101.60 ] | 1.00<br>[ 25.40 ] | WHITE             | 75                |                             |                    |
| S100X650VAC         | 1/0-250 MCM<br>WIRES     |                                          |                    |                   |                   | 50                |                             |                    |


NOTES:  
1. DIMENSIONS IN [ ]  
ARE IN MILLIMETERS.

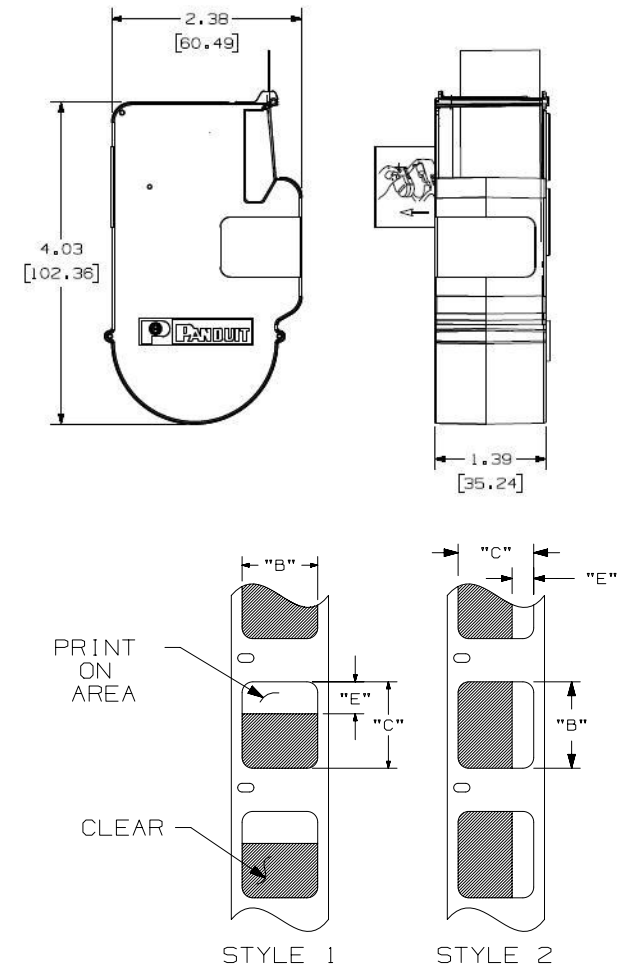

STYLE 1

STYLE 2

| 4   | 1/18/17 | RVU | JW   | JHAC | Change Reference Material from GMV16 to GMV17.                | GAECN03532 |
|-----|---------|-----|------|------|---------------------------------------------------------------|------------|
| 3   | 3/9/12  | RVU | SEWH | MSAD | CHANGE STYLE 1.00 to 1 AND LABEL/ROLL, 50.00 TO 50.           | 6588       |
| 2   | 9/15/10 | RVU | SEWH | MSAD | add a new label- S025X075VAC. 650 labels/cassette. "C", 0.25. | 6144       |
| 1   | 5/18/10 | RVU | SEWH | MSAD | GMV16 WAS GMV15.                                              | 6052       |
| 0   | 4/21/08 | RVU | SEWH | MSAD | DRAWING RELEASE.                                              | 5403       |
| REV | DATE    | BY  | CHK  | APR  | DESCRIPTION                                                   | ECN        |

|                                                                                       |         |                                                                                       |           |
|---------------------------------------------------------------------------------------|---------|---------------------------------------------------------------------------------------|-----------|
| TITLE                                                                                 |         | P1 LABEL CASSETTE<br>SELF-LAMINATING LABEL                                            |           |
| ITEM REVISION NAME                                                                    |         | CUSTOMER DRAWING                                                                      |           |
| 100743SR/16                                                                           |         |  |           |
| DATASET FILE NAME                                                                     |         |                                                                                       |           |
| 100743SR_DC_C10694/16E                                                                |         | MATERIAL:                                                                             |           |
| UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONAL TOLERANCES ARE: IN [ mm ]                  |         | SEE TABLE                                                                             |           |
| .x ± .1 [ 2.54 ] .xxx ± .005 [ .127 ]                                                 |         | DRAWING NUMBER:                                                                       |           |
| .xx ± .01 [ .25 ] ANGLES ± 5 °                                                        |         |                                                                                       |           |
|  |         | THIRD ANGLE<br>PROJECTION                                                             |           |
| DRAWN BY                                                                              | DATE    | CHK                                                                                   | SCALE     |
| RVU                                                                                   | 4/22/08 | JHAC                                                                                  | NTS       |
| SHT 1 OF 1                                                                            |         |                                                                                       | SIZE<br>A |