


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	6 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-1/8 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLUE
Panduit Die Index No. on Barrel	P24
Alternate Industry Die Index No. () on Barrel	(7)



Technical drawing of a Panduit 6 STR/FLEX LCCX6-14D cable. The drawing shows the cable's profile with dimensions and markings. The overall length is 2.86 ± 0.06. The diameter of the cable is .27 ± 0.02 DIA (2) PLS. The cable has a blue die cast marking (7) and a color coded barrel marking. The cable is labeled PANDUIT 6 STR/FLEX LCCX6-14D. The drawing also shows a cross-section of the cable with a diameter of .48 ± 0.04 and a length of 1.00 ± 0.02. The cable is shown with a bend radius of R.37 REF.

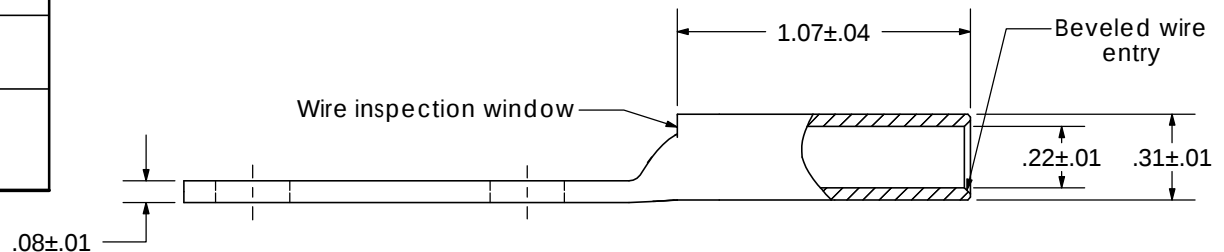

						 PANDUIT CORP. TINLEY PARK, ILLINOIS	
						LCCX6-14D-L Copper Lug - Two-Hole, Long Flex Barrel with Window	
00	6/03	SAC	SAC	RELEASED	10850		
REV	DATE	BY	CHK	DESCRIPTION	ECN	SCALE N/A	DRAWING NO / CAD FILE LCCX6-14D-CUST