


CATALOG NO.	STRANDED COPPER CONDUCTOR ACCOMMODATED		BOLT SIZE	BURNDY® INSTALLATION TOOLING (# CRIMPS)								WIRE STRIP LENGTH
	FLEX	CODE (AWG)		COLOR CODE	DIE INDEX	MECHANICAL	HYDRAULIC			DIELESS (# CRIMPS)		
						MD7-34R	BCT500 Y500CT	Y750, Y50, Y35, Y39, PAT750	Y46		Y45	
YAV29L2TC14FX	4/0 FLEX CLASS I, K, M DLO (450/24)	250	3/8 [M10]	YELLOW	16	W29RT(2) W29VT(2)	W29RT(2) W29VT(2)	U29RT(1)	U29RT(1)	U29RT(1)	HYDRAULIC: Y644 (1) PAT644 (1) Y81KFT (4) PAT81KFT (4)	1-1/16"
YAV29L2TC38FX												
YAV29L2NTCFX												

REV	DATE	DESCRIPTION	ECO	BY	CHK.
A	11/27/2012	CREATE SALES DRAWING	29531	MVP	DD

CATALOG NO.	DIMENSIONS								
	B ±.08	C ±.04	E ±.01	K ±.02	L ±.12	N ±.03	O.D. ±.01	T REF.	Y MIN.
YAV29L2TC14FX			.63 [16]	.27 [7]	2.87 [73]	.31 [8]			.96 [24]
YAV29L2TC38FX	1.03 [26]	1.18 [30]	1.00 [25]	.41 [10]	3.43 [83]	.41 [10]	.80 [21]	.16 [4]	1.43 [36]
YAV29L2NTCFX			1.75 [44]	.56 [14]	4.62 [117]	.63 [16]			2.40 [61]

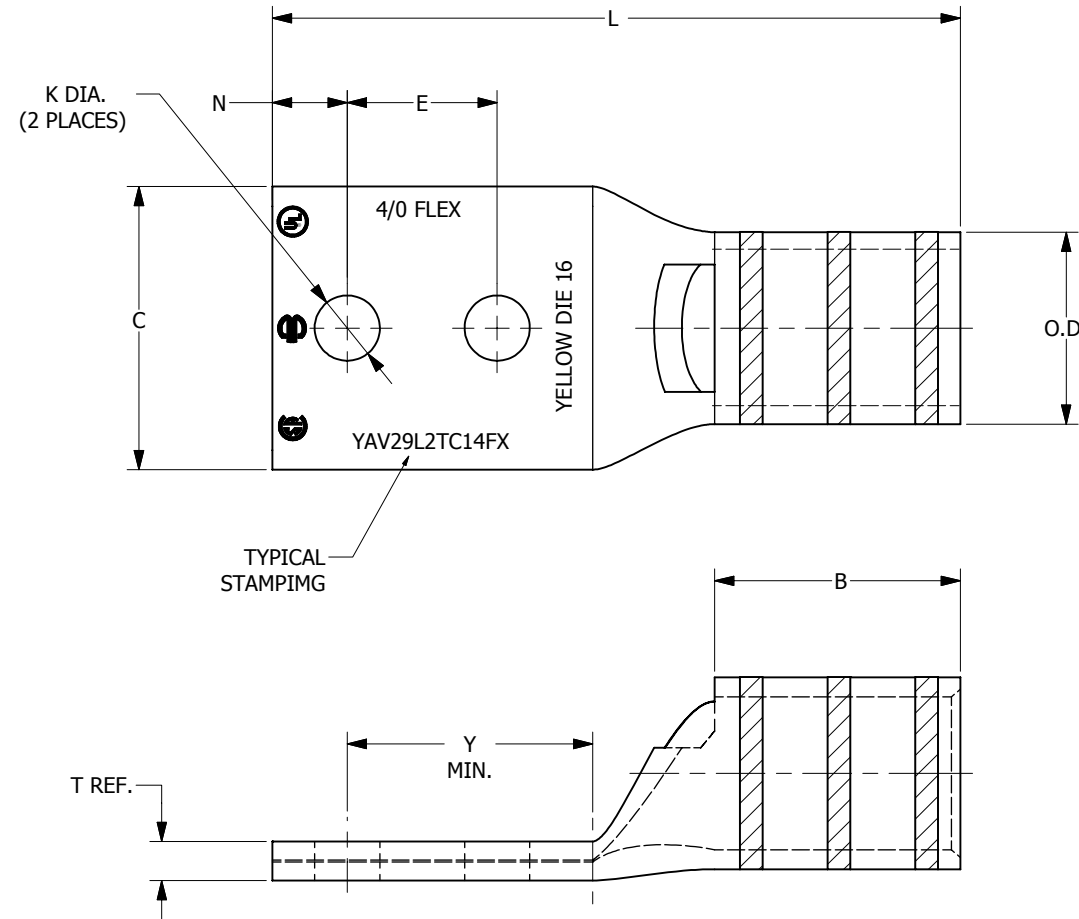

NOTES:

- MATERIAL: COPPER TUBING.
- FINISH: ELECTRO TIN PLATED.
- CATALOG # PT6515 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y45 SERIES TOOLS.
- CATALOG # PUADP-1 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y46 SERIES TOOLS.
- Y35P3 INDENTOR ADAPTOR REQUIRED FOR Y34PR INDENTOR.
- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
- UL LISTED AND CSA CERTIFIED WIRE CONNECTORS.

TO ORDER BURNDY® PRODUCTS CALL		HYLUG™	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: N/A	
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		CAT. NO: SEE TABLE	
FOR PRODUCT INFO: http://www.burndy.com		DRAWN BY: MVP 11/27/2012	
		CHECKER: --	
		DSN APRVL: --	
		MFG APRVL: --	
		QA APRVL: WATTS 07/26/2013	
		MKT APRVL: MICHAEL 07/31/2013	
		PROD FAM: CM&R COMPRESSION	
		DRAWING NO	
		PROJECT #: --	
		SIZE	
		DOCUMENT TYPE: SALES	
		REL LEVEL: Released	
		D	
		50015552	
		SHEET 1 OF 1	
		A	