



GreenSpace

DN470B LED20S/840 PSE-E C WH

GreenSpace Compact UGR22 - LED Module, system flux 2000 lm - 840 neutral white - Power supply unit external, DC compatible for central emergency lighting - White

Customers want to strike the ideal balance between their initial investment and the cost of the installation during its lifetime. GreenSpace is a cost-efficient and sustainable downlight that can be used to replace conventional CFL downlights in general lighting applications. It features the latest LED technology, which enables extremely low power consumption, while delivering consistent light output, stable color performance and high color rendering. The product's long lifetime makes it a true 'fit and forget' solution.

Product data

General Information			
Number of light sources	1 [1 pc]	Cable	-
Lamp family code	LED20S [LED Module, system flux 2000 lm]	Protection class IEC	Safety class II
Beam angle of light source	120 °	Glow-wire test	Temperature 850 °C, duration 5 s
Light source colour	840 neutral white	Flammability mark	F [For mounting on normally flammable surfaces]
Cap base	- [-]	CE mark	CE mark
Light source replaceable	No	ENEC mark	ENEC mark
Number of gear units	1 unit	Warranty period	3 years
Gear	-	Constant light output	No
Driver/power unit/transformer	PSE-E [Power supply unit external, DC compatible for central emergency lighting]	Number of products on MCB	30
Driver included	Yes	RoHS mark	RoHS mark
Optic type	C [High-gloss mirror]	Product Family Code	DN470B [GreenSpace Compact UGR22]
Luminaire light beam spread	88°	Light Technical	
Emergency lighting	No [-]	Optical cover/lens type accessory No [-]	
Connection	Push-in connector and pull relief		

Operating and Electrical

Electrical accessories	No [-]
Input voltage	220 to 240 V
Input frequency	50 to 60 Hz
Inrush current	14 A
Inrush time	0.24 ms
Power factor (min.)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing material	Aluminium
Reflector material	Polycarbonate aluminium coated
Optic material	Polycarbonate
Optical cover/lens material	-
Fixation material	-
Optical cover/lens finish	-
Overall height	95 mm
Overall diameter	216 mm

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux	2200 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	120 lm/W
Init. Corr. colour temperature	4000 K

Init. colour rendering index	80
Initial chromaticity	(0.38, 0.38) SDCM <5
Initial input power	18.3 W
Power consumption tolerance	+/-5%

Over Time Performance (IEC Compliant)

Driver failure rate at 5,000 hours	1 %
Median useful life L70B50	70000 h
Median useful life L80B50	50000 h
Median useful life L90B50	25000 h


Application Conditions

Ambient temperature range	+10 to +40 °C
Average ambient temperature	25 °C
Suitable for random switching	Yes (relates to presence/ movement detection and daylight harvesting)

Product Data


Full product code	871869624336700
Order product name	DN470B LED20S/840 PSE-E C WH
EAN/UPC – product	8718696243367
Order code	24336700
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12NC)	910500454965
Net weight (piece)	1.025 kg

Dimensional drawing

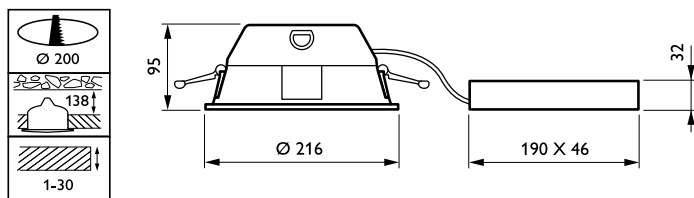


GreenSpace gen2 DN460B-DN473B

Photometric data

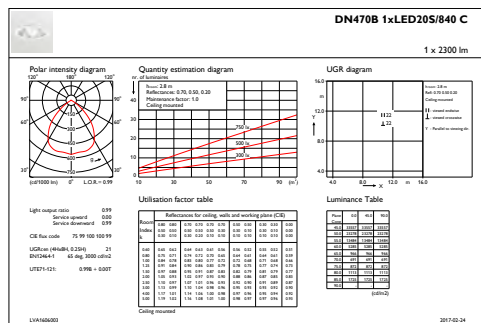

IFGU1_DN470B1xLED20S840C



IFPC1_DN470B1xLED20S840C

