



APC DIN Rail- Control Panel UPS



120V

A proven, reliable, flexible, cost-effective uninterruptible power source for control panels ensuring continuity of process control during a power event or power failure

Benefits include:

- Flexible Installation
- High Availability and Reliability
- Easy To Maintain
- Manageable



230V

APC DIN Rail-Control Panel UPS

500 VA / 325 W



Applications:

- Manufacturing Equipment: (a)
 - Machine controllers; Process control;
 - Sensitive equipment; Safety Infrastructure
- Material & Packaging handling: (b)
 - Fillers; Packaging robots;
 - Panel feeders/stackers
- Automation Control: (c)
 - PLCs; I/O Controllers; Industrial PCs;
 - SCADA systems; OIT's and RTU's
- IP-based Devices: (d)
 - Industrial Ethernet; Imaging;
 - Material-analysis; Motion sensors



Segments

- Water/Waste Water
- Mining/Metals/Minerals
- Biotech / Pharmaceutical
- Transportation
- Chemical
- Food & Beverage
- Semiconductor
- Automotive
- Oil/Gas

Benefit: Flexible Installation

Features:

- Control Panel or DIN Rail Mountable (1)
- Hardwired AC Input / Output (120 or 230Vac) (2)
- Internal or External Battery Installation (3)
 - Chassis knockout - right side or bottom
 - External battery mounting allows for compliance with United States NEC 480.9(A)

Benefit: Manageable

Features:

- Integrated Dry Contact Relay I/O (4)
- DB-9 Serial Port Communications RS232 protocol (5)
- APC SmartSlot: Optional Network Management, Modbus, or Relay I/O Contacts Card. (6)
- LED Status Indicators – External status LEDs indicate the state of the UPS: On-Line or On-Battery; Battery disconnected or needs to be replaced. (7)
- Audible Alarms – Notify the end-user of the following conditions: On-Battery; Low Battery; Replace Battery. (8)

Benefit: Easy to Maintain

Features:


- Simple battery replacement: Trained service (8) personnel can replace the battery even while the UPS is operating on utility power.
- Simple testing: Easily schedule "Automatic Self Test"

Benefit: High Availability & Reliability

Features:

- Temperature-compensated battery charging: Prolongs battery life by regulating the charge voltage according to battery temperature.
- Automatic Self-Test: Periodic battery self-test provides early detection of a battery in need of replacement.

SUA500PDR-H shown

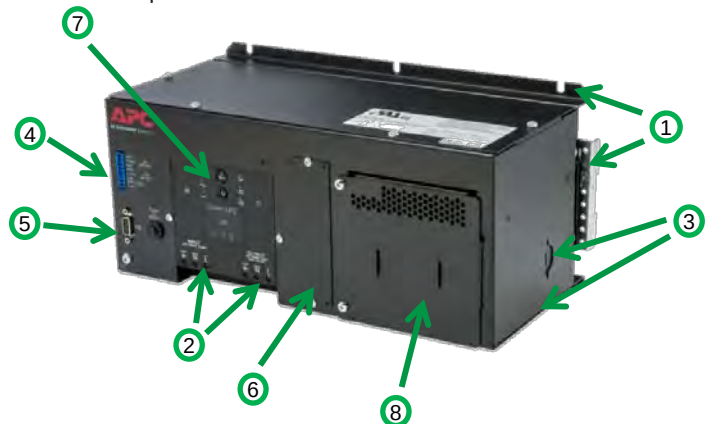

APC

by Schneider Electric

	SKU	SUA500PDR-S (standard battery) SUA500PDR-H (high temperature battery)	SUA500PDRI-S (standard battery) SUA500PDRI-H (high temperature battery)
Input			
	Nominal Input Voltage	120V	230V
	Input Voltage Range	82 - 144VAC	160 - 280VAC
	Input Frequency	45 - 65Hz; Auto-Selecting	
	Input Connections	Hardwired Input (3-Wire; H-N-G)	
Output			
	Nominal Output Capacity	500 VA / 325 W	
	Topology	Line Interactive	
	Waveform	Sine wave	
	Nominal Output Voltage	120V	Default: 230V (User Configurable: 220/230/240)
	Output Frequency	50/60 +/- 3Hz; Sync To Mains	
	Efficiency (Full-Load)	>94%	
	Output Voltage Distortion (Full Load)	<2% (100% Linear Load); <8% (100% Non-Linear Load)	
	Output Connections	Hardwired Output (3-Wire; H-N-G)	
Protection			
	Surge Energy Rating	540 Joules	340 Joules
	Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449	
	Thermal Protection	Yes	
Communications and Controls			
	Serial Port	DB9; UPS Status, and Control of User Configurable Parameters	
	SmartSlot	SmartSlot Accessories; AP9630 and AP9631 Network Cards, AP9610 Relay I/O Card, AP9622 Modbus Card	
	Emergency Power Off (EPO)	Terminal Block	
	Front Display Panel Buttons	On/Off, Self-Test, Alarm Silence, Cold-Start	
Visual and Audible Status Indicators			
	LEDs	On-Line, On-Battery, Overload, Replace Battery; and Load and Battery Bar-Graphs	
	Audible Alarm	On-Battery, Low-Battery, Overload	
Physical			
	Dimensions (HxWxD)	5.84"x14.24"x7.72" (148x362x171 mm)	
	Net Weight	18lb (8.18kg)	
	Color	Black	
Environment			
	Operating Temperature / Humidity	+32 to 104 °F (0 to 40 °C) / 0 - 95% (Non-Condensing) (with Standard Battery) (-S SKUs) +32 to 122 °F (0 to 50 °C) / 0 - 95% (Non-Condensing) (with High-Temp Battery) (-H SKUs)	
	Storage Temperature / Humidity	+23 to 140 °F (-5 to 60 °C) / 0 - 95% (Non-Condensing)	
	Mounting	Panel or DIN-Rail Mounting	
Conformance			
	Regulatory Certifications	cUL, Recognized UL 1778, FCC (Class A), CE (Class A), VDE	
	Battery Cartridge	APCRBC135	APCRBC136
Battery			
	Battery Type	Maintenance-Free, Sealed Lead Acid Battery	
	Nominal Battery Voltage	24VDC	
	Runtime (Full Load)	8.5 minutes	
	Recharge Time (To 90%)	<3 Hours	
	Expected Battery Life	3 to 5 Years at 68 °F (20°C)	up to 8 Years at 68 to 77 °F (20-25°C)
Physical			
	Dimensions (HxWxD)	4.22"x4.20"x5.65" (107x107x144 mm)	
	Net Weight	10.3lb (4.68kg)	7.26lb (3.3kg)
Environment			
	Operating Temperature / Humidity	+32 to 104 °F (0 to 40 °C) / 0 - 95% (Non-Condensing)	+32 to 122 °F (0 to 50 °C) / 0 - 95% (Non-Condensing)
	Storage Temperature / Humidity	+5 to 113 °F (-15 to 45°C) / 0 - 95% (Non-Condensing)	