


BC26 Universal Beam Clamp with Tapped Hole – BC260025EG



- One thru-hole for easier installation of threaded rod
- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI®/MSS-SP-58 (Type 19 and 23)

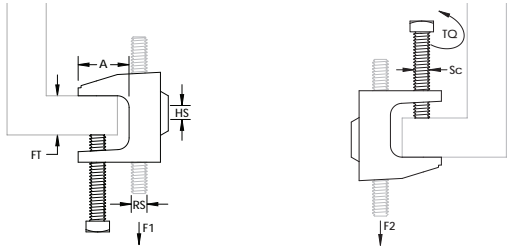

Part Number	BC260025EG
Material	Cast Iron
Finish	Electrogalvanized
Rod Size (RS)	1/4"
Flange Thickness (FT)	13/16" Max
A	13/16"
Hole Size (HS)	1/4"
Hole Type	Threaded
Screw Diameter (Sc)	1/4"
Torque (TQ)	40 ft lb
Static Load 1 (F1)	250 lb
Static Load 2 (F2)	100 lb
Standard Packaging Quantity	100 pc
UPC	78285634025

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the I-beam and then an additional 1/4 to 1/2 turn added.

ANSI is a registered trademark of American National Standards Institute.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

