

Proof of Performance



SignalTEK NT

Copper and Fiber Network Transmission Tester

Proof of Performance

SignalTEK NT

Network Transmission Tester More than a qualifier



No calibration required plus replaceable RJ45 contacts

VoIP (068	08:34			
F	AILED	00:00:10			
Line Rate	10	0 Mb/s-FD			
Frame Size	21	218			
IR (Mb/s)	27	27			
Tx Frames		154,816			
1	100	%			
Rx Frames		122,144			
4	799	6			
Errors		32,672			
	219	6			
		SETUP			

VoIP fail - 21% packet loss

Wiremap 0033	08:34
SHORT	
Type: CatSe UTP	568A
Second Se	2 42t 2 42t 4 19t 5 19t 6 0t 8 42t 8 42t 5 5 5 10t 6 0t 8 42t

Wiremap test displaying open and short

If you install, maintain or troubleshoot data cabling and Ethernet networks, SignalTEK NT allows you to prove the performance up to Gigabit Ethernet transmission rates.

By simulating actual network traffic users are able to test and document network and data cable performance to Gigabit Ethernet standards.

Where system warranties are not required the SignalTEK NT is a cost effective way of proving your copper and fiber networks provide error-free performance.

Transmission testing proves real performance

There is no industry standard defining the testing requirements of cable qualifiers, consequently passing a qualification test does not prove that the installed structured cabling will provide flawless data transmission.

Uniquely, SignalTEK NT utilizes a test method known in wide area networks as transmission testing to prove the performance of a network by sending real Ethernet data frames through the cabling and/or network devices to compare the error rate against the IEEE802.3ab Gigabit Ethernet standard. This provides a clear standards based Pass/Fail of the link being tested.

SignalTEK NT requires no configuration from the user as the two handsets automatically pair ready for testing; just select a usage scenario to simulate the appropriate service, from VoIP to CCTV, Video and web traffic.

Installation testing

Cabling:

- Network traffic performance test on copper and fiber to IEEE802.3ab standard
- Wiremap test for open, shorts, miswires and split pairs to TIA-568 standard
- Gigabit link verification for copper and fiber cabling
- Use a list of wiremap templates for common Ethernet cable types including CAT 6A/7A/8, and non-Ethernet cable, such as Profinet and ISDN.

Active network:

- Network load testing through switches simulating CCTV/IPTV/VoIP/Web traffic
- PoE/PoE+ verification that displays available voltage at device location
- Check Ethernet connectivity at device location to 10/100/1000 Mb/s
- Verify network configuration (device IP/gateway address/subnet mask)
- Switch port identification via LLDP/CDP protocols

Troubleshooting/diagnostics

Cabling:

- Distance to fault using TDR technology (copper only)
- Ability to identify and trace cables with a compatible amplifier probe (62-164)
- Optical power indication (with compatible SFP modules)

Active network:

- Network load testing through switches simulating CCTV/IPTV/VoIP/Web traffic
- Stress test network before installing bandwidth hungry devices
- Port blink to visually trace cable from work area outlet to network switch
- Displays port ID of LLDP/CDP enabled switches to eliminate manual cable tracing
- Identify network connection problems as hardware, network or configuration faults
- Ping local network devices and Internet URL's
- Count number of hops between network points with traceroute tests
- PoE load testing to confirm available power meets PoE device requirements

Send test reports from anywhere using the free app





Step 1

- Test
- Create job folder
- Enter job site information
- Perform autotest on copper/fiber cabling and copper/fiber networks




Step 2

Connect

- Activate SignalTEK NT wireless hotspot
- Connect your mobile phone or tablet
- with the IDEAL AnyWARE AppTransfer test reports to your mobile device
- View test reports

Step 3 Send

- Select reports (PDF or CSV) to send
- Select preferred transfer method email, ftp, cloud storage etc.
- Send file
- Alternatively save test reports to USB key

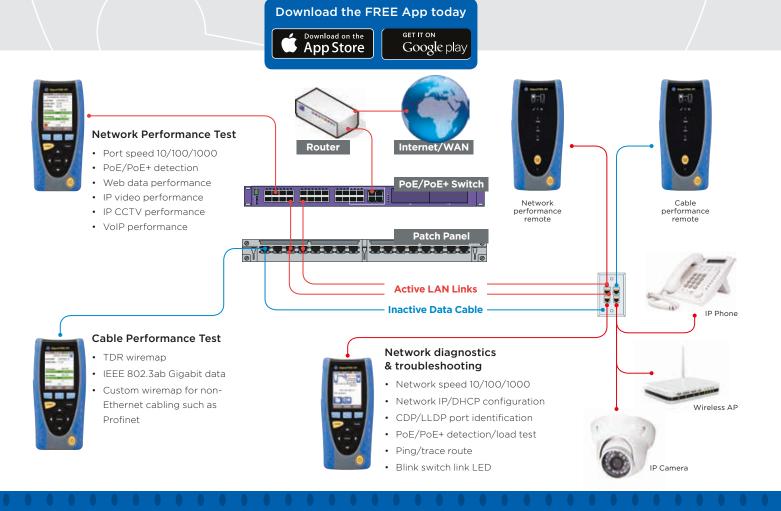

SignalTEK NT

Network Transmission Tester

More than a qualifier

Test Reporting

SignalTEK NT automatically generates test reports in PDF or CSV format.

The summary page of each report can be customized to include logo, company and operator details. Choose between 3 different reports that can show either passed, failed or all test reports in each report:

- Summary
- Brief
- Full (see example on the right side)

Ordering Information

Part No.	Kit Contents
R156005	SignalTEK NT - Network Transmission Tester. Includes 1 x display with touchscreen, 1 x remote, 2 x NiMH batteries, 2 x patch cables - 12 inch, Cat 5e STP, 2 x power supply with EU/UK/US adapters, 1 x USB Wi-Fi adapter, 1 x quick reference guide, 1 x carry case

For the copper only version without network troubleshooting, please check out our SignalTEK CT.

Optional Accessories

Part No.	Description			
MGKSX1	1 x 1000BASE-SX Fiber kit. Includes 850nm SFP (Small Form factor Pluggable) SX transceiver, LC/LC and LC/SC duplex multimode cables and SC/SC duplex adapter. 2 required for Gigabit transmission testing.			
MGKLX2	1 x 1000BASE-LX Fiber kit. Includes 1310nm SFP (Small Form factor Pluggable) LX transceiver, LC/LC and LC/SC duplex singlemode cables and SC/SC duplex adapter. 2 required for Gigabit transmission testing.			
MGKZX3	1x 1000BASE-ZX Fiber kit. Includes 1550nm SFP (Small Form factor Pluggable) ZX transceiver, LC/LC and LC/SC duplex singlemode cables and SC/SC duplex adapter. 2 required for Gigabit transmission testing.			
62-164	1 x IDEAL amplifier probe			
150058	1 x RJ45 insert extraction tool, 10 x lifejack RJ45 inserts			

For more accessories including numbered wiremap remotes please visit our website.

Basic Specifications

Max. No.	Max. No. of	Max. Measured	Battery	Dimensions per	Weight per
of Jobs	Stored Test	Length	Life	handset in inches	handset
50	5000	593 ft.	5 hours	6.9 x 3.2 x 1.6	0.88 lbs

For detailed specifications, please visit our website.




Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc. All Rights Reserved. IDEAL, IDEAL NETWORKS, IDEAL AnyWARE and the SignalTEK logos are trademarks or registered trademarks of IDEAL INDUSTRIES, INC. IDEAL INDUSTRIES NETWORKS DIVISION 1375 Park Ave. Sycamore, IL 60178, U.S.A Phone: +1 800-947-3612 | Fax: +1 815-895-5181 Email: contactus@idealnetworks.net

www.idealnetworks.net



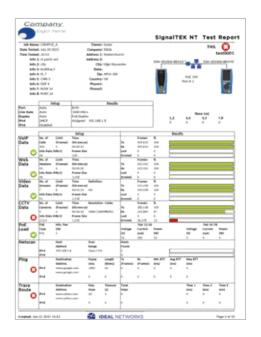



A subsidiary of IDEAL INDUSTRIES INC.

Specification subject to change without notice. E&OE Printed in UK. P-5336 08/18 © IDEAL Networks 2018 Publications no.: 156899, rev. 2