

### EziBlank Wall's Features

**A stable rack-sized air flow barrier** that can be positioned anywhere.


**Quick to assemble** from flat sheet into strong triangular structure.

**Suits various rack spaces** up to 46RU high and 600 / 750 / 800mm wide.

**Prevents hot air recirculation** in a hot or cold containment aisle.

**3 Sizes in one.** Simply "rotate" to obtain correct rack width.

## Extend vertical coverage of EziBlank Wall

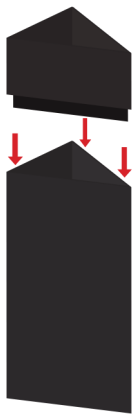

**About EziBlank® Wall.** These EziBlank® Wall replacement racks are assembled in minutes, creating a stable rack sized air flow barrier, that can be positioned anywhere and re-used again and again.


Not all data centres are the same, our **250mm Extension Kit** is designed to fit the EziBlank Wall and extend its vertical coverage by 250mm, giving you the option to increase containment height easily.

### Specifications:

#### Physical

Dimensions:	Folded: 810 x 350 x 20 (mm)
	Expanded: 2320 x 350 x 4 (mm)
Shipping Dimensions	810 x 350 x 50 (mm)
Weight:	3.5kg per Pack of 2
Material:	Flame retardant , impact resistant, water resistant, twin walled polypropylene sheet
Colour:	Black
Standards:	Flame retardant to UL V-2 / UL94
	Comply with AS/NZS 1530.3—1999 Methods for fire tests on building materials, components and structures Simultaneous determination of ignitability, flame propagation, heat release and smoke release .

### Dimensions

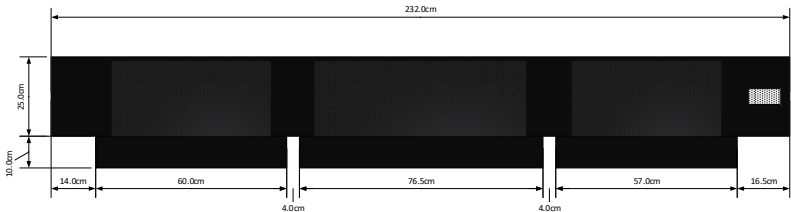

### Ordering Information:

EZWEX250-PNL-02

EZIBLANK®WALL Extension Kit. Suits 600mm, 750mm and 800mm wide Racks, Pack of 2.



Data Centre, Power Monitoring & Air Flow Management Specialists.

Telephone +61 (02) 9690 2852  
Facsimile +61 (02) 9698 6952  
enquiries@idcsolutions.com.au  
www.idcsolutions.com.au