



OVERVIEW

The Zone Controller (ZONEC2) allows for integration of non-network devices to the network. The full-featured, multi-purpose unit interacts directly with an organization's mass notification system, acting as a hub for a variety of devices.

ANALOG INTEGRATION



Connect to an existing amplifier, sensor, contact closure, access control device, microphone, CD/MP3 player, strobe, and more

SIP INTEGRATION



Call to page analog speakers

SOFTWARE



Diagnostic software included
Compatible with third-party software, including InformaCast, Revolution, and Cisco CallManager

SOLUTIONS

- Paging
- Bell scheduling
- Code alerts
- Emergency notification
- Access control
- Security monitoring
- Sound Masking
- Music streaming

ADDITIONAL FEATURES

- Built-in web server
- Full multicast and broadcast support
- Requires Cat5 or Cat6 cable
- Audio line in
- Audio line out
- 2 general purpose inputs
- 1 general purpose output with option to provide 12V DC power
- 8-ohm speaker output
- Microphone input

COMPATIBLE PERIPHERALS

Strobe Kit
AND-STROBE-KIT-1

Call Button Kit
AND-BTN-KIT-1

SOFTWARE

The ZONEC2 integrates easily with third-party mass notification software, as well as SIP and VoIP phone systems, enabling a facility to take advantage of all the device capabilities. The device also comes with diagnostic software (compatible to run alongside third-party software), and an on-board web server interface, both which provide the ability to monitor and troubleshoot the ANetD devices on the network.

Third-Party Software

- InformaCast (Singlewire)
- Revolution (Syn-Apps)
- IPSession (IPCelerate)
- MessageNet Systems
- BellComander (Acro Vista)
- And more!


VoIP Phone Systems

- Cisco CallManager
- Mitel
- Avaya
- 3CX
- Polycom
- And more!

IPClockWise

- Diagnostic tool included with device purchase
- Complements investment in third-party software
- Developed and supported by Advanced Network Devices

DIMENSIONS

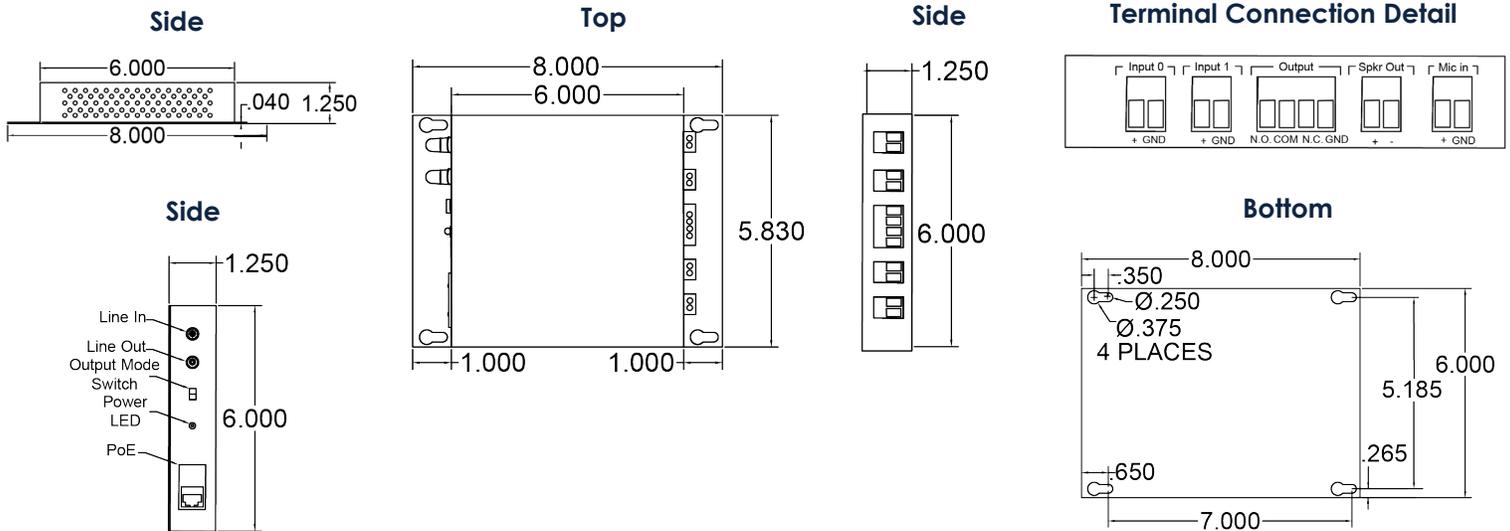

SPECIFICATIONS

ZONEC2

ETHERNET I/F	10/100 Mbps
AUDIO POWER	8 W / 16 W
POWER INPUT	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W
SUPPORTED PROTOCOLS	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
OPERATING TEMPERATURE	0° TO 50° C (34° TO 122° F)
DIMENSIONS	8.0" W x 1.25" H x 6.0" D
WEIGHT	1 lb 8 oz (680 g)
WARRANTY	2 Year Limited

Due to continual product development, specifications are subject to change without notice.

