


PD-9001GR/SP

Single Port, High Power Gigabit Midspan,
802.3at Compliant with Surge Protection

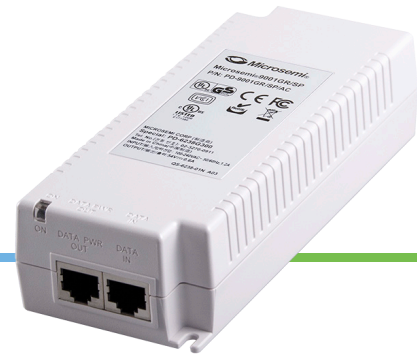

Summary

Microchip's PD-9001GR/SP is a single port, high-power solution for remote powering of current and emerging high power applications. The PD-9501GR/SP provides Surge Protection functionality optimal for the installation of outdoor PDs. Generating up to 30W, the PD-9001GR/SP enables remote power for a new range of applications including 802.11n access points, Pan-TiltZoom (PTZ) cameras, and video-phones. It complies to IEEE 802.3at PoE standard and is backward compatible to IEEE 802.3af. It can power both existing 10/100 Base-T network devices and emerging wireless 1000 Base-T devices such as WiMAX and wireless IEEE 802.11n access points.

Key Features

- IEEE 802.3at compliant with 2-event classification
- IEEE 802.3af backward compatible
- Output power of 30W is guaranteed
- Supports 10/100/1000 Base-T applications
- Compatible with IEEE 802.3af devices and pre-standard devices
- Safe: low power devices receive only the power they need
- Automatic detection and protection of non-standard Ethernet terminals
- IP cameras installations

Specifications

Feature	Description
Number of Ports	1
Data Rate	10/100/1000 Mbps
Input Power Requirement	AC Input Voltage: 100 to 240 Vac AC Input Current: 1.2 A AC Frequency: 50/60 Hz
Output Power	30W
Power over Ethernet Output	4/5 (+), 7/8 (-) Nominal Output Voltage: 54 VDC
Dimensions	L x W x H 151 mm x 62 mm x 38 mm 5.94 in x 2.44 in x 1.5 in
Weight	340g (0.75 lbs)
Connectors	Shielded RJ-45, EIA 568A and 568B
Indicators	System Indicator: AC Power - Yellow User Indicator: Channel Power - Green
Environmental Conditions	Operating Ambient Temperature: -4°F to +104°F (-20°C to +40°C) Operating Humidity: Maximum 90%, Non Condensing Storage Temperature: -4°F to +158°F (-20°C to +70°C) Storage Humidity: Maximum 95%, Non-condensing Operating Altitude: -1000 to 10,000 ft. (-304.8 to 3048 m)
Hazardous Substances	CE, WEEE
Waranty	1 year
Extended Waranty Available	No
Reliability	MTBF: 240,000 hrs @25C
Thermal Rating	25 BTU/hr
Regulatory Compliance	IEEE 802.3at
Electromagnetic Emission and Immunity	FCC Part 15 Class B EN 55032 Class B EN 55024 VCCI
Safety	UL/IEC/EN 62368-1 Please consult Microchip for a complete list of Certifications
Surge Protection	EN 61000-4-5 (10/700 µsec, 4 KV) IEC-61643-21 GR-1089-CORE Issue 4 ITU-T K.45

Technical Support

For technical support please visit the Microchip Technical Support Portal www.microchip.com/support.

Ordering Information

Part Number	Name	Description
PD-9001GR/SP/AC	PD-9001GR/SP/AC	1-port IEEE 802.3at Gigabit Midspan with Surge Protection

About Microchip mPoE



Microchip multi-Power over Ethernet (mPoE) is a technology that powers any wired network device seamlessly and efficiently, making it the ideal solution for Ethernet-based applications. Leveraging a uniquely designed algorithm, this technology solves interoperability issues between different PoE standards and legacy solutions to provide an international network power standard. As pioneers in PoE, Microchip offers a comprehensive end-to-end portfolio of PoE solutions comprised of PoE ICs and PoE systems (midspans/injectors and switches).