



# 30, 60, and 80 Amp PanView iQ™ (PViQ™) Networked Power Outlet Units



SPECIFICATION SHEET

## specifications

PViQ™ Power Outlet Units shall integrate with the Panduit® PIM™ Software Platform to enable intelligent management of the in-cabinet power usage. This system helps to quickly identify and resolve power issues, find and reclaim available or underutilized power capacity and automate collection of real-time and accurate power information. The units shall have local and remote monitoring for power consumption, easy upgradable firmware updates and be capable of mounting vertically to the Net-Access™ and Net-SERV™ Cabinets or Panduit 4-post racks. The vertical power outlet units shall have 30, 60 and 80 Amp circuits and shall have multiple outlet options with standard IEC or NEMA compliant receptacles. Power outlet units shall have ten foot cords using twist lock or IEC 309 plugs and black powder-coated finish.



## technical information

<b>Dimensions:</b>	QZ1A1M2BM24E1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	QZ1A1M2BM30P1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	QZ1B1L2BN30P1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	QZ1B1L2BN24H1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	*QZ1B1P3BN30P1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	QZ1A1P3BN24E1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	QZ1A1P3BN30P1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	*QZ1B1P3BN24H1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	QZ1C1P3BN33X1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	QZ1C1P3BN24Y1	70"H x 2.0"W x 2.0"D (1778mm x 51mm x 51mm)
	QQ1C1P3BN24Y1	70"H x 2.0"W x 2.0"D (1778mm x 51mm x 51mm)
	QZ1D2E3BN30P1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	PZ1B2G6BN12N1	3.4"H x 17.0"W x 9.0"D (86mm x 432mm x 229mm)
	QZ1B2C3BN30P1	66.3"H x 2.0"W x 2.0"D (1683mm x 51mm x 51mm)
	QZ1B2G6BN12N1	66.3"H x 2.3"W x 3.45"D (1683mm x 51mm x 51mm)
	QZ1B2G6BN24Z1	66.3"H x 2.3"W x 3.45"D (1683mm x 51mm x 51mm)
	QQ1B6A4AP12N1	66.3"H x 3.5"W x 3.5"D (1683mm x 89mm x 89mm)

\*For Delta configuration option, replace 1P with 1N

<b>Power outlet unit mounting:</b>	Vertical power strips provide multiple outlets and do not occupy any rack spaces Horizontal power strips provide multiple outlets and mount to any EIA 19" rack
<b>Power outlet unit packaging:</b>	All power outlet units include 10' power cords, mounting brackets, screws and tool-less button mounting

## key features and benefits

<b>Remote access to power consumption data</b>	Web-based GUI provides global network access to real-time power information to improve data center energy efficiency and reduce operating costs through analysis of power usage and trends
<b>Integrates with Panduit® PIM™ Software</b>	Aggregates power information through a single web based GUI to facilitate easy analysis of data
<b>Integrated power monitoring and management</b>	On unit display provides true RMS Input Current Load (in amps) for each power circuit or phase to properly load balance and maximize power circuits, improving data center power management and planning
<b>Alarm messaging capability</b>	Provides user-defined alarm/messaging capabilities for specific events that exceeded thresholds to help minimize network downtime
<b>Mounting buttons</b>	Allows tool-less mounting of power strips for faster installations
<b>Certification/agency approvals</b>	Complies with UL and c-UL Listed 60950

## applications


Panduit's PViQ™ Networked Power Outlet Units can either be utilized standalone for smaller installations or centrally managed by the Physical Infrastructure Manager™ (PIM™) Software Platform for larger data centers. The PViQ™ POUs provide continuous real-time power monitoring via the network for enhanced system management and reliability.

The PViQ™ POUs safely and efficiently manage and distribute power to allow multiple pieces of equipment to share a single power connector to enhance scalability of network build outs. Mounting flexibility allows quick and easy installation and when used with Panduit® Net-Access™ and Net-SERV™ Cabinets, the user receives a complete networking solution that will satisfy data center requirements today and into the future.

[www.panduit.com](http://www.panduit.com)

<b>PIM™ Software Platform and Modules</b>	
<b>Base functionality module:</b>	PIM-BASE
<b>Power module:</b>	PIM-POWER
<b>PanView iQ™ IEC60320 C14 to NEMA 5-15R Adapters</b>	
<b>PViQ™ C14 Power Adapter (US):</b>	PVQ-C14ADPTR-S
<b>PViQ™ C14 Power Adapter (Japan):</b>	PVQ-C14ADPTR-J
<b>Vertical Single Phase, 120V, 30A 24 NEMA 5-20 Outlets</b>	
<b>Aggregate/breaker monitoring:</b>	QZ1A1M2BM24E1
<b>Vertical Single Phase, 208V, 30A 24 NEMA 6-20 Outlets</b>	
<b>Aggregate/breaker monitoring:</b>	QZ1B1L2BN24H1
<b>Vertical Single Phase 120V, 30A 24 IEC-13 and 6 IEC-19 Outlets</b>	
<b>Aggregate/breaker monitoring:</b>	QZ1A1M2BM30P1
<b>Vertical Single Phase 208V, 30A 24 IEC-13 and 6 IEC-19 Outlets</b>	
<b>Aggregate/breaker monitoring:</b>	QZ1B1L2BN30P1
<b>Vertical 3~ WYE 120V 30A 24 IEC 13 and 6 IEC-19 Outlets</b>	
<b>Phase/breaker (X,Y,Z) monitoring:</b>	QZ1A1P3BN30P1
<b>Vertical 3~ WYE 208V 30A 24 IEC 13 and 6 IEC-19 Outlets</b>	
<b>Circuit/breaker (XY,YZ,ZX) monitoring:</b>	QZ1B1P3BN30P1
<b>Vertical 3~ WYE, 120V, 30A 24 NEMA 5-20 Outlets</b>	
<b>Phase/breaker (X,Y,Z) monitoring:</b>	QZ1A1P3BN24E1
<b>Vertical 3~ WYE, 208V, 30A 24 NEMA 6-20 Outlets</b>	
<b>Circuit/breaker (XY,YZ,ZX) monitoring:</b>	QZ1B1P3BN24H1
<b>Vertical 3~ WYE 120V/208V, 30A 12 IEC 13, 6 IEC-19 and 6 NEMA 5-20R Outlets</b>	
<b>Phase (XY,YZ,ZX) and outlet monitoring:</b>	QQ1C1P3BN24Y1
<b>Vertical 3~ WYE 120V/208V, 30A 24 IEC 13, 3 IEC-19 and 6 NEMA 5-20R Outlets</b>	
<b>Circuit/breaker (XY,YZ,ZX) outlet monitoring:</b>	QZ1C1P3BN33X1
<b>Vertical 3~ WYE 120V/208V, 30A 12 IEC 13, 6 IEC-19 and 6 NEMA 5-20R Outlets</b>	
<b>Circuit/breaker (XY,YZ,ZX) monitoring:</b>	QZ1C1P3BN24Y1
<b>Vertical 3~ WYE 230/400V, 30A 24 IEC-13 and 6 IEC-19 Outlets</b>	
<b>Phase/breaker (X,Y,Z) monitoring:</b>	QZ1D2E3BN30P1
<b>Horizontal 3~ Delta 208V, 60A 12 IEC-19 Outlets</b>	
<b>Breaker monitoring:</b>	PZ1B2G6BN12N1
<b>Vertical Single Phase 208V, 60A 24 IEC 13 and 6 IEC-19 Outlets</b>	
<b>Breaker monitoring:</b>	QZ1B2C3BN30P1
<b>Vertical 3~ Delta 208V, 60A 12 IEC-19 Outlets</b>	
<b>Breaker monitoring:</b>	QZ1B2G6BN12N1
<b>Vertical 3~ Delta 208V, 60A 12 IEC-13 and 12 IEC-19 Outlets</b>	
<b>Breaker monitoring:</b>	QZ1B2G6BN24Z1
<b>Vertical 3~ Delta 208V, 80A 12 IEC-19 Outlets</b>	
<b>Phase (X,Y,Z) and outlet monitoring:</b>	QQ1B6A4AP12N1
<b>Net-Access™ Server Cabinet</b>	
<b>32"W x 45 RU:</b>	CS1, CS2, and CS3
<b>Net-Access™ Switch Cabinet</b>	
<b>32"W x 45 RU:</b>	CN1, CN2, and CN3

# 30, 60, and 80 Amp PanView iQ™ (PViQ™) Networked Power Outlet Units

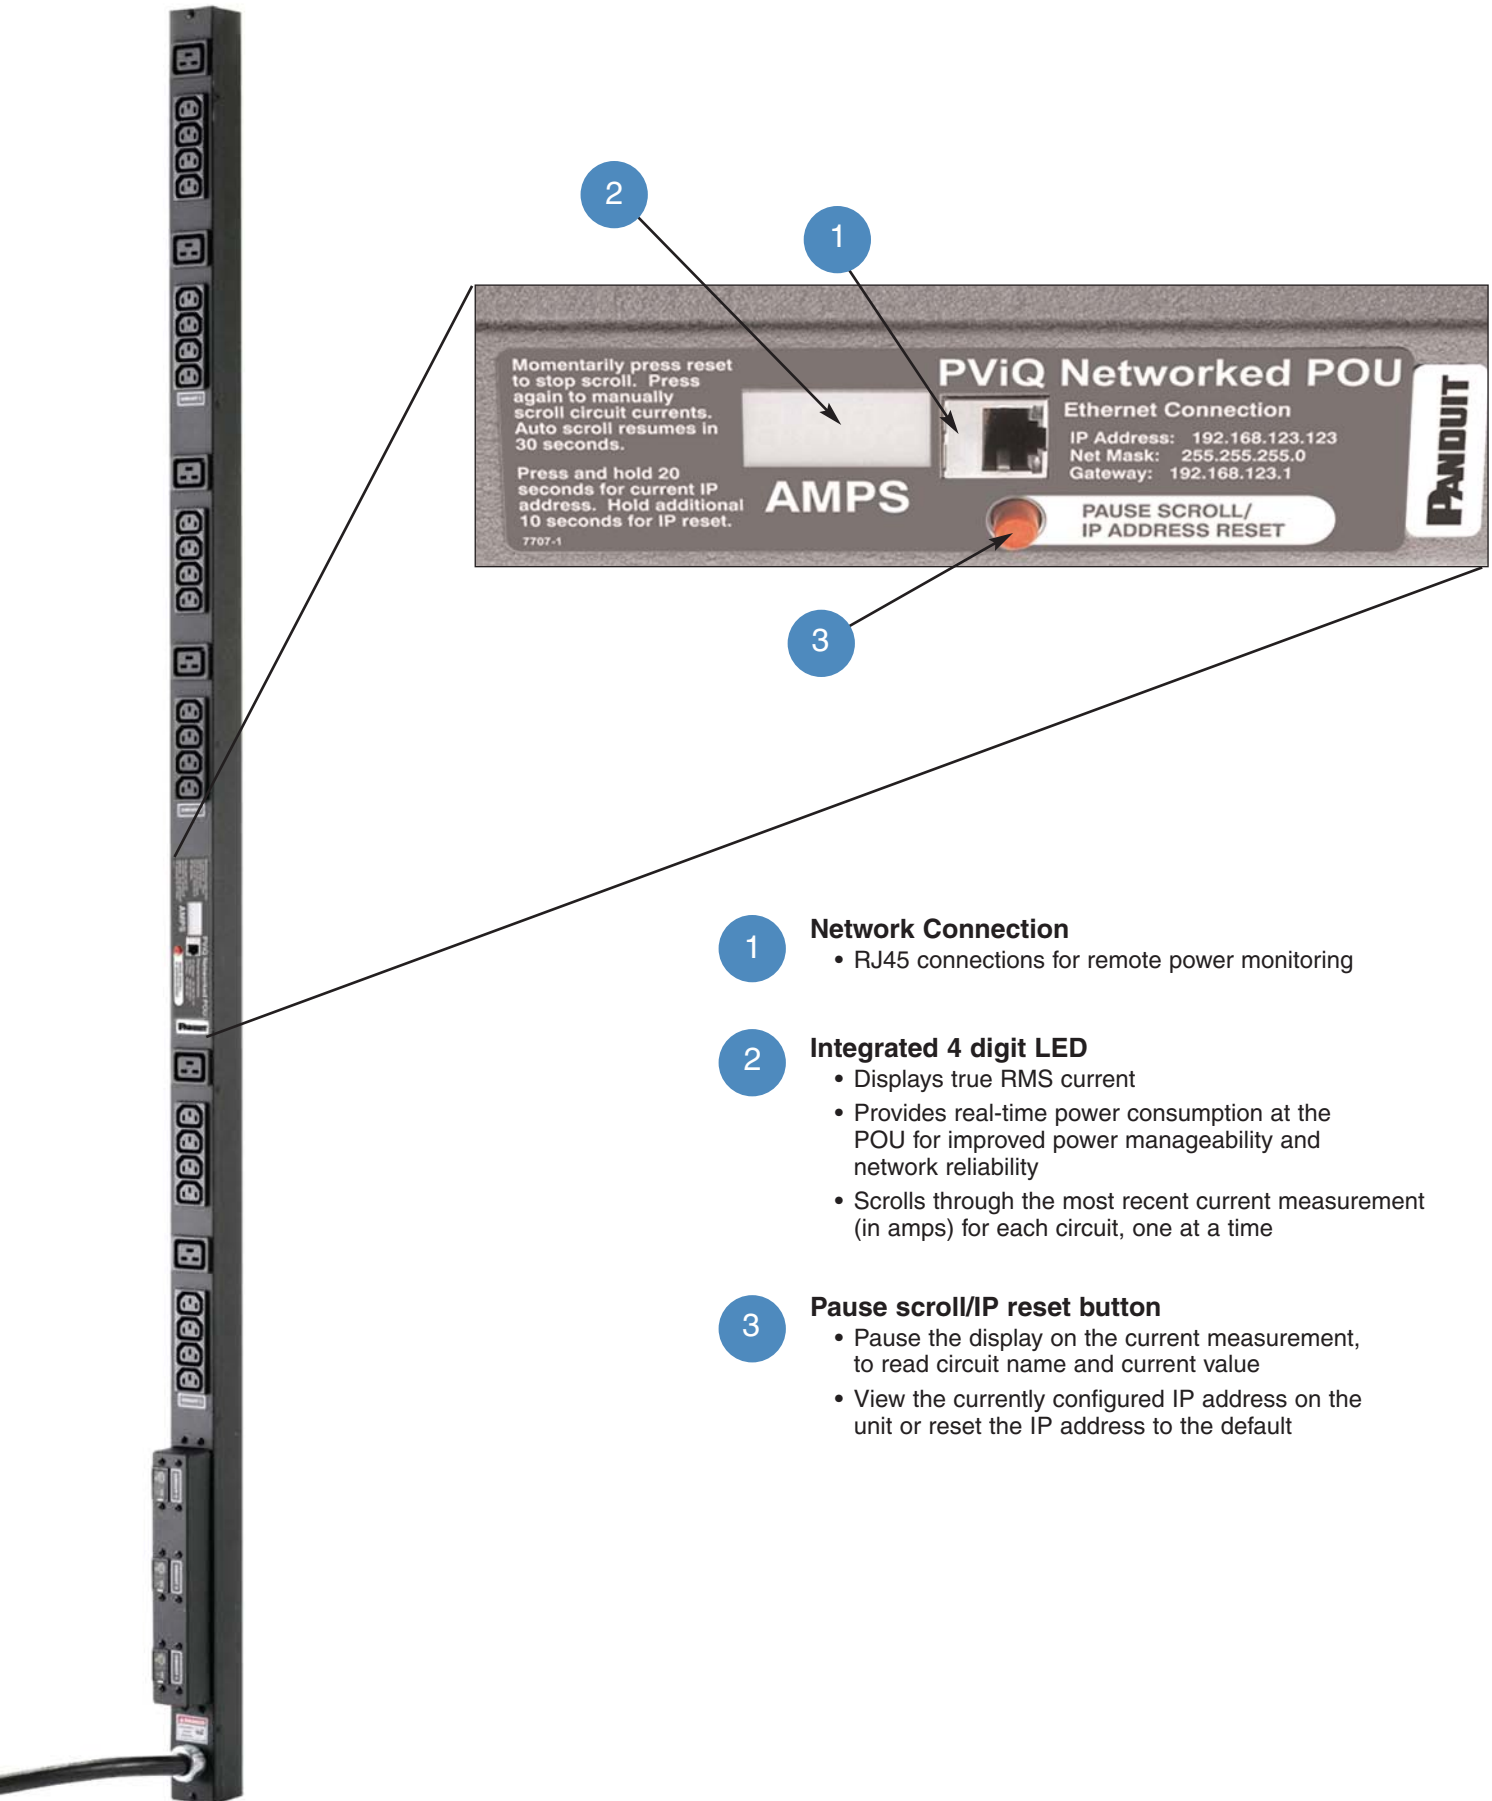

- 1 Network Connection**
  - RJ45 connections for remote power monitoring
- 2 Integrated 4 digit LED**
  - Displays true RMS current
  - Provides real-time power consumption at the POU for improved power manageability and network reliability
  - Scrolls through the most recent current measurement (in amps) for each circuit, one at a time
- 3 Pause scroll/IP reset button**
  - Pause the display on the current measurement, to read circuit name and current value
  - View the currently configured IP address on the unit or reset the IP address to the default

# 30, 60, and 80 Amp PanView iQ™ (PViQ™) Networked Power Outlet Units

## Current Monitoring

- Provides real time current power information via a standard web browser



## Display

- Name and location information can be stored for easy identification of POU and individual outlets



## Alarms

- Alarm status provided if current is greater than entered threshold



## Configuration

- Simple network and SNMP configuration for easy setup



## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300 and reference PVSP47

**PANDUIT**®

©2011 Panduit Corp.  
ALL RIGHTS RESERVED.

WW-PVSP47

6/2011