

NetKey® Fiber Optic Connectors – Pre-Polished Cam Termination

PANDUIT®

DATA SHEET

Pre-polished fiber optic connectors are TIA/EIA-604 FOCIS compliant and contain a factory-terminated fiber, eliminating field polishing and adhesive. Pre-polished fiber optic connectors capture fiber and buffer in one action allowing for up to two re-terminations with no degradation in performance.



technical information

	ST Opticam® Connectors	SC Opticam® Connectors
Standards compliance:	TIA/EIA-604 FOCIS-2 compliant; exceeds TIA/EIA-568-B.3 requirements	TIA/EIA-604 FOCIS-3 compliant; exceeds TIA/EIA-568-B.3 requirements
Fiber compatibility:	62.5/125µm OM1, 50/125µm OM2, 10Gig™ 50/125µm laser optimized OM3/OM4 and 9/125µm OS1/OS2	
Fiber size and type:	900µm tight-buffered fiber; 250µm coated fiber, by using F250BT-C 250 micron fiber build-up tube kit or FO6CB or FO12CB fan-out kit	
Performance:	Insertion loss: Composite 0.3dB average (multimode) Return loss: Composite >20dB (multimode)	

key features and benefits

	ST Opticam® Connectors	SC Opticam® Connectors
Factory pre-polished fiber stub end face	Eliminates inconsistent and time-consuming field polishing to deliver required optical performance; reduces termination time (less than half the time of field polish connectors) and the number of installation tools required	
Dual cam design with fiber and buffer clamps	<p>Secures both the fiber and the buffer during the camming step to facilitate consistent termination results; reduces the termination time compared to conventional termination methods</p> <p>Allows up to two re-terminations to achieve optimum termination results; reduces the number of rejected connectors and terminations to provide yield rates approaching 100% for lower installed cost</p>	
Translucent housing assembly	Facilitates inspection of the fiber termination quality; results in rapid installations, improved termination yields, and lower installed costs	
Mechanical cable retention	Consistently provides higher than industry standard cable retention; requires no adhesive, speeding installation	
Non-optical disconnect	—	Maintains data transmission under tensile loads for jacketed cable

Opticam® Termination Tool

Universal termination	Secures both fiber and buffer in one action for all OptiCam® Connectors with connector specific cradles (included); ensures fast, consistent, and optimal terminations
Integrated visual termination indicator (VTI)	Offers visual indication of proper termination after the cam step has been completed; virtually eliminates operator error to deliver a higher yield for a lower installed cost

applications

- Fiber optic backbone and horizontal applications
- Maintenance or emergency restoration of fiber networks
- Retrofit/initial install in both behind-the-wall (BTW) permanent side of panelized interconnect and cross-connect
- Remote areas and confined spaces
- OptiCam® Termination Tool gives installers the flexibility to terminate in very close proximity to the application

NetKey® SC OptiCam® Pre-Polished Connectors with Composite Ferrule

50/125µm mm simplex:	NKFSCMPC5BL
50/125µm mm simplex (100 pk.):	NKFSCMPC5BL-C
62.5/125µm mm simplex:	NKFSCMPC6EI
62.5/125µm mm simplex (100 pk.):	NKFSCMPC6EI-C

NetKey® ST OptiCam® Pre-Polished Connectors with Composite Ferrule

50/125µm mm simplex:	NKFSTMP5BL
50/125µm mm simplex (100 pk.):	NKFSTMP5BL-C
62.5/125µm mm simplex:	NKFSTMP6EI
62.5/125µm mm simplex (100 pk.):	NKFSTMP6EI-C

OptiCam® 1.6/2.0mm Boot Assemblies

10Gig® multimode (Aqua):	FMCBT2AQ-X*
Multimode (Black):	FMCBT2BL-X*
Singlemode (Blue):	FSCMT2UB-X*

*X = Bag of 10 boots; 100 per carton

OptiCam® 3.0mm Boot Assemblies


10Gig® multimode (Aqua):	FMCBT3AQ-X*
Multimode (Black):	FMCBT3BL-X*
Singlemode (Blue):	FSCMT3UB-X*

*X = Bag of 10 boots; 100 per carton


OptiCam® Termination Tooling

OptiCam® Termination Kit:	FCAMKIT
OptiCam® Conversion Kit (upgrades OptiCrimp® to also terminate OptiCam® Connectors):	FPPKIT-CVY
Field polish kit upgrade (upgrades field polish kit to also terminate OptiCam® Connectors):	FIELDKITUPG
ST cradles (2 per pkg.):	FSTC
SC cradles (2 per pkg.):	FSCC

NetKey® SC OptiCam® Pre-Polished Simplex Connector

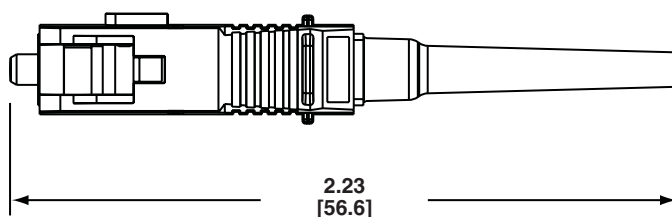

NetKey® ST OptiCam® Pre-Polished Simplex Connector

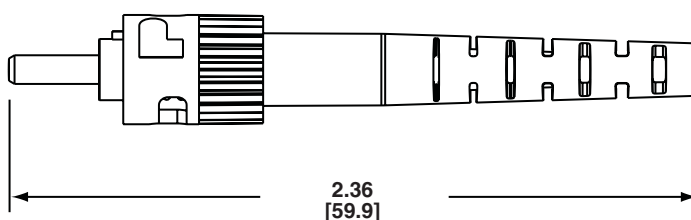

OptiCam® Termination Tool



Dimensions are in inches. [Dimensions in brackets are metric].

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800-777-3300 and reference NKDS17

PANDUIT®

©2010 Panduit Corp.
ALL RIGHTS RESERVED.
WW-NKDS17
2/2010