

QuickNet™ SFQ Series MPO Fiber Adapter Panels (FAPs)



SPECIFICATION SHEET

specifications

Small Form Factor QuickNet™ (SFQ) MPO FAPs contain FOCIS 5 compatible fiber optic adapters and meet or exceed TIA/EIA-568-C.3 requirements. Variations include panels with 4, 6, or 8 MPO adapters in either key-up to key-up or key-up to key-down configurations. Maximum density allows for 64 MPO ports in a 1RU space when used in conjunction with QuickNet™ Patch Panels. All SFQ FAPs snap quickly into the rear of QuickNet™ Patch Panels for easy network deployment and quick migration from 10G to 40/100G infrastructure.



technical information

Standards requirements:	All adapters meet or exceed TIA/EIA-568-C.3 requirements MPO: TIA-604-5-D; FOCIS 5 compatible	
Insertion loss and Return Loss:	Supports the performance of Panduit Multimode and Singlemode MPO Patch Cords	
	Standard Multimode MPO Patch Cords:	0.50dB Max IL; 20dB Min RL
	Optimized Multimode OM3 and OM4 MPO Patch Cords:	0.35dB Max IL; 26dB Min RL
	Singlemode MPO APC Patch Cords:	0.75dB Max IL; 55dB Min RL

key features and benefits

Snap quickly into QuickNet™ Patch Panels	Assures flexibility and ease of network deployment. Facilitates migration from 10G to 40/100G infrastructure
MPO adapters follow TIA/EIA-568-C.3 and TIA-604-5-D polarity standards	Type A Polarity: Black adapter housing with key-up to key-down configuration; K=1 Type B Polarity: Charcoal gray adapter housing with key-up to key-up configuration; K=2

applications

The QuickNet™ SFQ Series Fiber Adapter Panels are a component of the QuickNet™ Fiber Optic Cabling System. QuickNet™ SFQ Series Fiber Adapter Panels are used in high-density network applications as specified in the Data Center Cabling Standard TIA 942 for cross connects in main distribution, horizontal distribution, and equipment distribution areas. The QuickNet™ Pre-Terminated Cabling System meets the demands of Gigabit Ethernet, 10 Gigabit Ethernet, and high-speed Fibre Channel

systems while maintaining compatibility with Ethernet, Fast Ethernet, and ATM. QuickNet™ SFQ Series Fiber Optic Cassettes, MPO Fiber Adapter Panels and QuickNet™ Copper Cable Assemblies are interchangeable within QuickNet™ Angled and Standard Patch Panels, enabling deployment flexibility and a unified pre-terminated solution. This ensures efficient use of space, quick deployment and the highest reliability for the lowest installed cost.

QuickNet™ SFQ MPO FAPs – Type A Black Adapters

FAP with 4 MPO key-up/key-down adapters:	FQMAP45BL
FAP with 6 MPO key-up/key-down adapters:	FQMAP65BL
FAP with 8 MPO key-up/key-down adapters:	FQMAP85BL

QuickNet™ SFQ MPO FAPs – Type B Charcoal Gray Adapters

FAP with 4 MPO key-up/key-up adapters:	FQMAP45CG
FAP with 6 MPO key-up/key-up adapters:	FQMAP65CG
FAP with 8 MPO key-up/key-up adapters:	FQMAP85CG

QuickNet™ MTP* Trunk Cable Assemblies (Female MTP* to Female MTP*) – Plenum (OFNP) Rated

12-fiber:	FSP^1255F+++A
24-fiber:	FSP^2455F+++A
48-fiber:	FSP^4855F+++A

QuickNet™ MTP* Trunk Cable Assemblies (Male MTP* to Male MTP*) – Plenum (OFNP) Rated

12-fiber:	FSP^1266F+++A
24-fiber:	FSP^2466F+++A
48-fiber:	FSP^4866F+++A

QuickNet™ MTP* Trunk Cable Assemblies (Female MTP* to Male MTP*) – Plenum (OFNP) Rated

12-fiber:	FSP^1256F+++A
24-fiber:	FSP^2456F+++A
48-fiber:	FSP^4856F+++A

QuickNet™ MTP*/MPO Multimode Interconnect Round Cable Assemblies Female to Female – Plenum (OFNP) Rated

OM4 – 10Gig™ 50/125um:	FZN0505RTPM001
Optimized OM4 – 10Gig™ 50/125um:	FZP0505RTPM001
OM3 – 10Gig™ 50/125um:	FXN0505RTPM001
Optimized OM3 – 10Gig™ 50/125um:	FXP0505RTPM001
OM2 – 50/125um:	F5N0505RTPM001

QuickNet™ MTP*/MPO Multimode Interconnect Round Cable Assemblies Male to Male – Plenum (OFNP) Rated

OM4 – 10Gig™ 50/125um:	FZN0606RTPM001
Optimized OM4 – 10Gig™ 50/125um:	FZP0606RTPM001
OM3 – 10Gig™ 50/125um:	FXN0606RTPM001
Optimized OM3 – 10Gig™ 50/125um:	FXP0606RTPM001
OM2 – 50/125um:	F5N0606RTPM001

QuickNet™ Cassette MTP* Cleaning Tool

All MTP* connectors:	FIBCCCT
----------------------	---------

QuickNet™ Patch Panels

Angled 24-port:	QAPP24BL
Angled 48-port:	QAPP48HDBL
Standard 24-port:	QPP24BL
Standard 48-port:	QPP48HDBL

QuickNet™ Zero RU Cassette Bracket




Holds 2 cassettes:	FQCBRUA
--------------------	---------

*MTP is a registered trademark of US Conec Ltd.

^Z = 550 meter reach 10Gig™ Multimode OM4 (12-fiber only), X = 300 meter reach 10Gig™ Multimode OM3, 5 = 50/125um Multimode OM2, 6 = 62.5/125um Multimode OM1, 9 = Singlemode OS1/OS2

+++Standard lengths for MTP* to MTP* OM3/OM4, 12, 24 and 48 fiber are available from 40 to 200 feet in increments of 5 feet. Ex: FSPX1255F040A (40ft. length) to FSPX1255F100A (100ft. length.) For additional lengths and availability, please contact Panduit Customer Service.

QuickNet™ SFQ Series MPO Fiber Adapter Panels (FAPs)

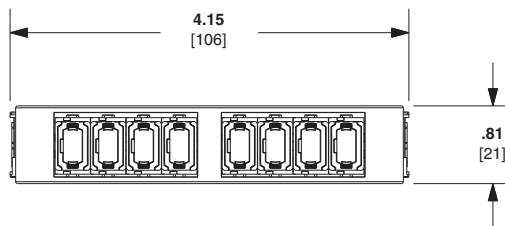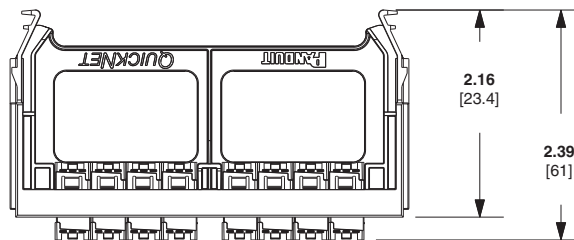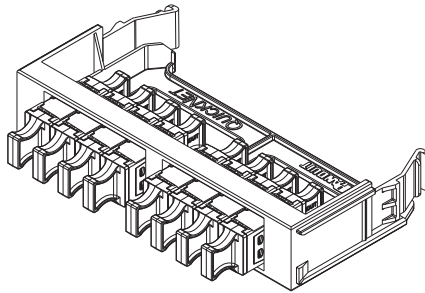

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300 and reference FBSP46

PANDUIT®

©2011 Panduit Corp.
ALL RIGHTS RESERVED.
WW-FBSP46
1/2012