

ETP-100E – Flush Mounting Emergency Phone

Description

The **ETP-100E** is an indoor, hands-free Emergency Phone for use in locations such as: elevators, areas of rescue, stairwells, indoor controlled access areas, senior citizen housing and correctional facilities.

Features

- Vandal resistant stainless steel faceplate and metal button
- Uses regular phone lines or PBX
- Phone line powered: no power supply or battery backup needed
- Push button once to call, then speak hands-free
- LED indicator for hearing impaired
- Built-in auto-dialer can dial two numbers: if first number doesn't answer or is busy, dials second number
- Auto-answer allows security to monitor and initiate calls with Emergency Phone
- Options available that offer the ability to automatically identify attendant of location of calling phone by recorded message and digital display



Specifications



| | |
|----------------------|---|
| Construction: | 12 gauge (2.8mm) #4 brushed stainless steel faceplate |
| Dimensions: | Front Panel: 9.5(241) W x 11.75(298) H in(mm) Wall Opening: 4.5(114) W x 7.5(191) H x 2.5(64) D in(mm) |
| Weight: | 6 lbs. (2.7kg) |
| Mounting: | Flush mounts |
| Communication: | 2-way hands-free communication |
| Digit Capacity: | Up to 18 digits, including pauses, for each of two phone numbers |
| Dialing Speed: | Approximately 10 tones per second |
| Power Source: | Phone line powered (requires 20mA at 24 v off-hook) |
| Connection: | Parallel tip and ring connected to RJ11 connector for quick installation |
| Circuit Protection: | Varistor lightening suppressed and full wave polarity guarded |
| Programming: | Non-volatile EEPROM programming can be done from any telephone. No battery backup is needed |
| "On Time": | Programmable from 1 to 4270 minutes in 1-minute increments |
| Wiring Requirements: | 1 twisted-shielded pair |

Options & Accessories


| | |
|---|---|
| Voice Location Identifier: | Model ETP-100EV includes the capability to record a message identifying the location of the call. Message is recorded and duration set during programming |
| Auxiliary Input/Outputs: | Add " AUX " to model number. Input allows unit to be activated by any device that creates a contact closure. Two outputs can activate a strobe or light as well as remotely control a door, CCTV or other device |
| Mounting Sleeve: | Use Model MS-400 to mount flush into wall |
| 8-Line Consolidator: | Model EC-8 allows connection of up to 8 phones on one phone line while retaining ability to call each phone individually. Can also create a closed system without need for any phone lines |
| Scream Detector: | Scream Alert™, model SA-1 , automatically activates phone upon hearing a scream (requires AUX option) |
| Monitoring/Diagnostic Software Package: | Talk-A-Lert®, model ETP-TAL , automatically polls each Emergency Phone, reports incoming calls and keeps permanent records of all events |

ETP-100E – Flush Mounting Indoor Emergency Phone

Dimensions

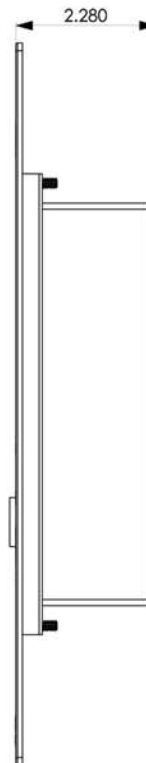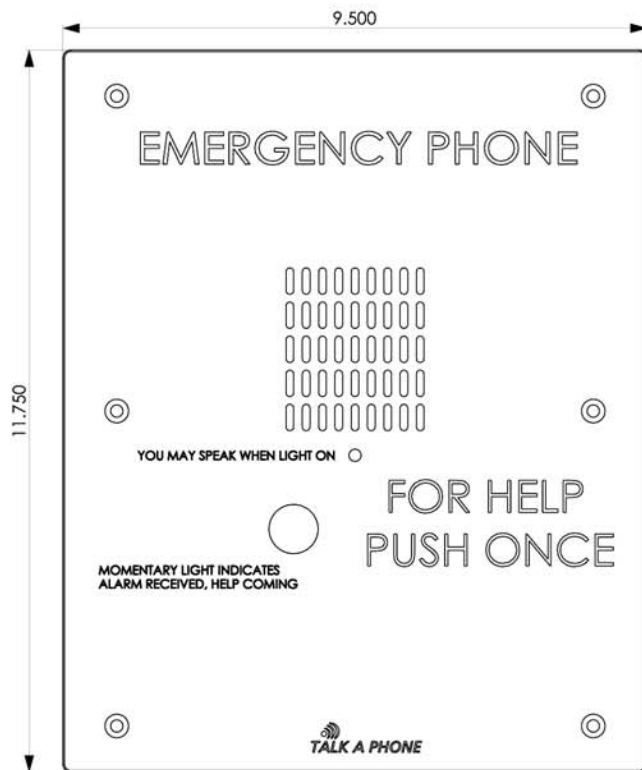

SIDE VIEW

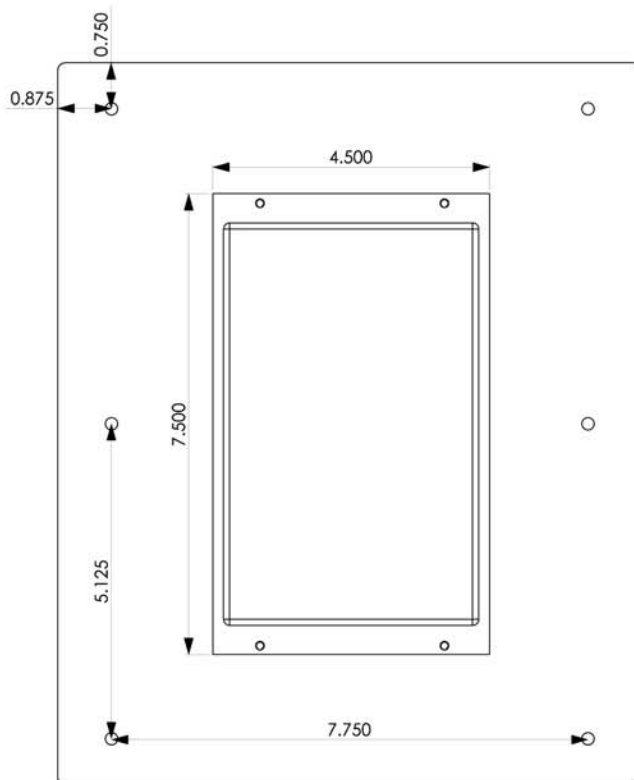

REAR VIEW

**All dimensions
are in inches**