

WEBS-RETRO-MT/R4- WEBS[®] Retro Kit for ETP-MT/R OP 4 Towers

Description

The **WEBS-RETRO-MT/R4** is a kit that converts an existing ETP-MT/R OP4 or ETP-MT/R OP5 Tower to a highly visible WEBS[®]-capable Mass Notification Unit.

Features

- Supplements an Emergency Phone Tower with a highly effective Wide-Area Emergency Broadcast System
- Concealed high-power speakers provide 360° coverage
- Amplifier and speakers all mount inside retrofit kit and the tower
- · Separate volume controls for each speaker

Specifications

Dimensions:	12.38(315) W x 10.38(264) D x 13.2(335) H in(mm)		
Mount Weight:	100 lbs. (46 kg)		
Construction:	12-gauge steel with multi-coat rust inhibitive coating		
Broadcast Audio:	Four 40 watt concealed speakers (one in each direction) with two 15 watt amplifiers		
Power:	120VAC, maximum total 96 watts		
Mounting:	Mounts atop an existing emergency phone tower		

Connectivity Options

	WEBS [®] Paging Controller			
	Analog Connectivity	IP Connectivity	Wireless IP Connectivity	
400 Series Analog Phone	WEBS-ZPS	N/A	N/A	
500 Series VoIP Phone	WEBS-CONTACT (WEBS-CM-2 required for each paging device)	WEBS- CONTACT	WEBS-CONTACT (VOIP-RF required for each paging device plus head-end)	

Options & Accessories

Local Paging Option: Model **WEBS-RETRO-MIC** allows the personnel to unlock a door in the tower and make on site announcements.

Tall Arm Option:Model OPTION 4 ARM is a five (5) feet high camera mounting arm to
provide the extra elevation required after placing the WEBS-RETRO-MT/R4
atop the tower.

Copyright 2010 Talk-A-Phone Co. All rights reserved.







WEBS-RETRO-MT/R4 atop ETP-MT/R OP5

WEBS-RETRO-MT/R4- WEBS[®] Retro Kit for ETP-MT/R OP 4 Towers


Overall Dimensions

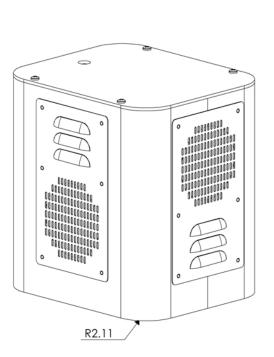


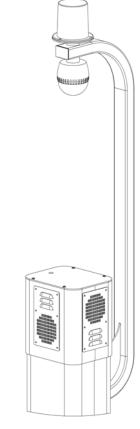

WEBS-RETRO-MT/R4 shown

Dimensions





Bottom View

All dimensions are in inches.

Copyright 2010 Talk-A-Phone Co. All rights reserved.