

Multi-Mount Power








Designed to optimize space and efficiency in power management, this 15 Amp rackmount power distribution system provides up to 20 total outlets within a shallow depth

Features

- Versatile design allows for the unit to be mounted either horizontally or vertically in the rack
- Shallow 4" depth
- Up to 20 total outlets (on the front and rear)
- Select models include sequencing
- 9', 14-gauge SignalSafe™ power cord minimizes the effects of AC magnetic fields
- Select models include 2-stage surge protection with remote status notification
- Reversible, adjustable mounting ears provide flexible installation options with either 0° or 90° mounting
- Outlets are oriented in various directions to accommodate plugs of different shapes, sizes and orientations










Architects' and Engineers' Specifications

Multi-Mount rackmount power distribution unit shall be Middle Atlantic Products model

PD-________ (refer to chart), with a (15, 20) Amp power capacity. Rackmount power
distribution unit shall operate on 120 volt AC/60Hz current. Rackmount power distribution
unit shall include 9' 14/3 SignalSafe™ power cord with NEMA L5-__P (15, 20) plug,
____ (8, 10) rear outlets, 10 front outlets, and 15 Amp power switch located on the power strip's
front (PD-2015R-HH-NS only). Rackmount power distribution shall be available with remote
notification of 2-stage surge protection (refer to chart). Rackmount power distribution shall be
available three channels of sequencing (two outlets per channel, six total), include adjustable
sequencing delays of up to six seconds, and the option of local or remote control (refer to
chart). Rackmount power distribution unit shall occupy one rackspace and be constructed of
18-gauge phosphate pre-treated steel with a black powder coat finish. Rackmount power strip
shall be RoHS EU Directive 2002 / 95 / EC Compliant. Rackmount power strip shall be ETL
Listed to UL standard 1363 in the US and to CAN/CSA C22.2 #21 in Canada. Rackmount


power strip shall be GREENGUARD Indoor Air Quality Certified for Children and Schools.

Rakmount power strip shall be manufactured by an ISO 9001 registered company. Rackmount power strip shall be warrantied to be free from defects in materials and workmanship under normal use and conditions for a period of 3 years.

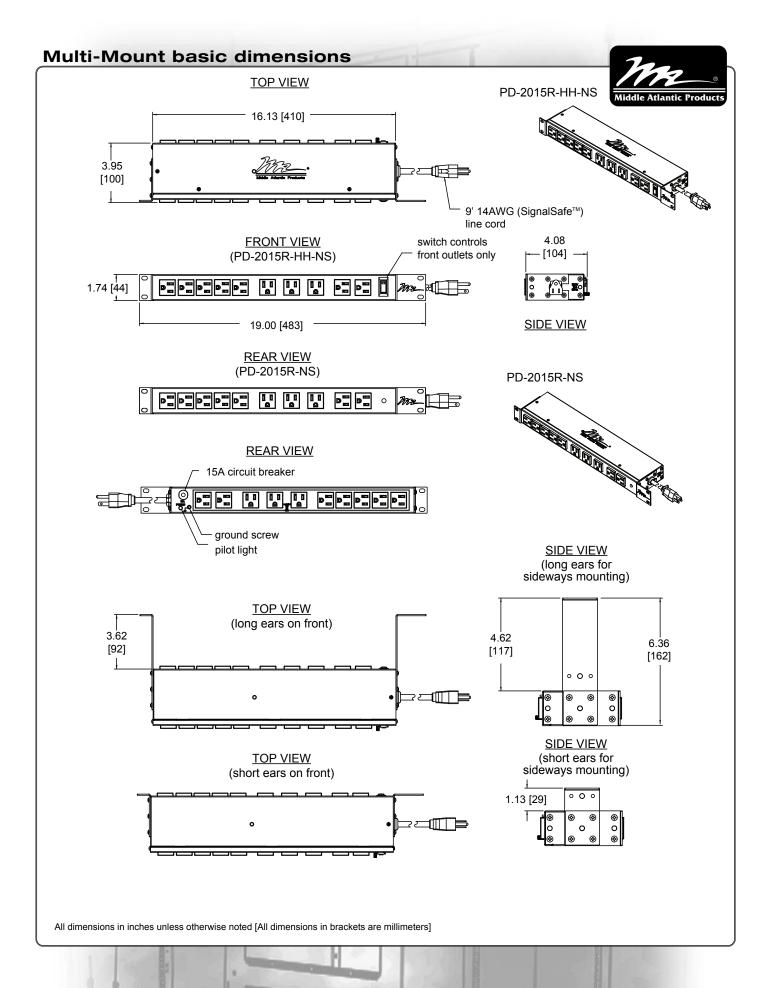





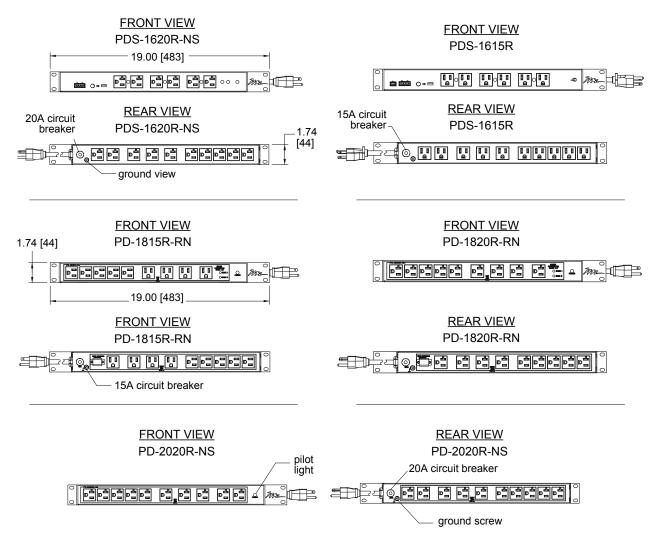

Part #	Circuit	Sequencing	Power Switch	Surge & Spike Protection	# of Outlets
PD-1815R-RN	One 15 Amp	-	-	2-stage with remote notification	18 (10 front, 8 rear), always on, breaker
PD-1820R-RN	One 20 Amp	-	-	2-stage with remote notification	18 (10 front, 8 rear), always on, breaker
PD-2015R-NS	One 15 Amp	-	-	-	20 (10 front, 10 rear), always on, breaker
PD-2015R-HH-NS	One 15 Amp	-	Illuminated switch/combo breaker for front 10 outlets only	-	20 (10 swithced), rear always on, breaker
PD-2020R-NS	One 20 Amp	-	-	-	20 (10 front, 10 rear), always on, breaker
PDS-1615R	One 15 Amp	3-step	-	2-stage with remote notification	16 (10 always on, 6 sequenced)
PDS-1620R-NS	One 20 Amp	3-step	-	-	16 (10 always on, 6 sequenced)