




## GE Magnetic Contacts

### 1075 Series

*3/8" Diameter Press-Fit with Wire Leads*

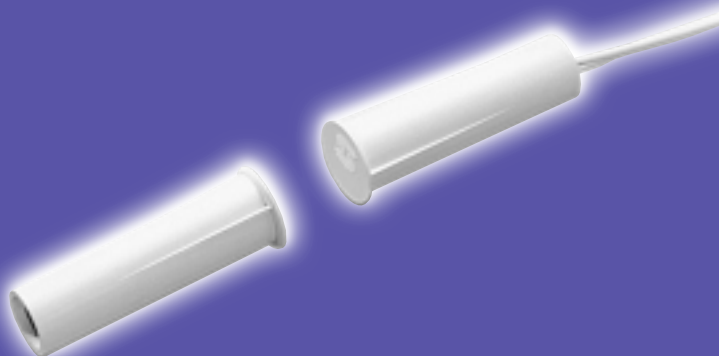

<b>Gap Distance</b>	<b>Closed Loop</b>	<b>SPDT</b>
1/2"	1075	1070
1 1/4"	1075W	
2"	1065W	

<b>Color</b>	White, Mahogany Brown
<b>Quantity</b>	10

100% **TESTED**



1075-N




# 1075 Series

## 3/8" Diameter Press-Fit with Wire Leads

### Installation Instructions

1. Drill appropriate diameter and depth holes for contact and magnet (3/8" x 1 1/3" for contacts and 3/8" x 1 1/2" for 1065W magnets, 3/8" x 1 1/3" for 1070, 1075, and 1075W magnets).
2. Connect contact leads to security system loop and test for continuity.
3. Lightly coat the contact and magnet with RTV mounting compound (Part Number 1905) and insert into respective holes.

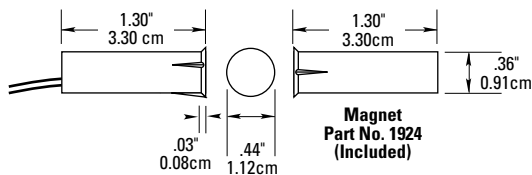

### UL Specifications

Part Number	Loop Type	Electrical Configuration	Gap Distance*
1065W	Closed	N.O.	2"
1070	Open or Closed	SPDT	1/2"
1075	Closed	N.O.	1/2"
1075W	Closed	N.O.	1 1/4"

\* Gap Specifications are nominal and may vary  $\pm 20\%$ . Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.

\*\* European Union Specifications: 48 V AC/DC max, 0.5 Amp

\*\* FORM A (1065W, 1075, 1075W)

FORM C (1070)

Voltage: 100 V AC/DC max

Voltage: 30 V AC/DC max

Current: 0.5 A max

Current: 0.25 A max

Power: 7.5 W max

Power: 3.0 W max

WARNING: Each electrical rating is an individual maximum and cannot be exceeded!

### C-UL Specifications

All Contacts: 30 VDC, 50 mA max

Gap Specifications:\*

See UL Gap Specification



GE Interlogix