



SENTROL

1072 Series

3/8" Diameter Flanged with Wire Leads

Magnetic Contacts

Gap distance

Closed loop

Regular Up to 1/2"

1072

Color

Natural

Quantity

10



1072-N



0 46188 01426 2

100% TESTED



1072 Series 3/8" Diameter Flanged with Wire Leads Magnetic Contacts

Installation Instructions


General

Drill 3/8" diameter hole, press in, secure with screws through flange holes.


Magnet (1057)

Slightly overdrill 3/8" diameter hole. Coat magnet with RTV Mounting Compound (Sentrol part number 1905), press into hole.

1072 Series

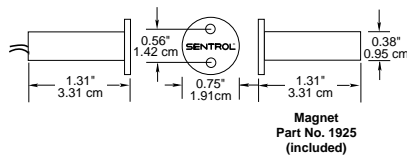

Mounting Positions



UL Specifications

Part Number	Loop Type	Electrical Configuration	Gap Distance Make* (Up to)
1072	Closed	N.O.	1/2"

FORM A (1072)

Voltage: 100 VAC/DC Max

Current: 0.5 A Max

Power: 7.5 W Max

* Gap Specifications are nominal and may vary $\pm 20\%$. Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.



PH 503.692.4052

USA & Canada: 800.547.2556

Technical Service: 800.648.7424 FaxBack: 800.483.2495

www.sentrol.com www.interlogixsecurity.com

©2001 Interlogix, Inc.
Interlogix, Caddx, ESL, ITI and Sentrol are
trademarks of Interlogix, Inc.